


AZURE ADMINISTRATOR LAB

Resource Group Deployment


I created my first Azure Resource Group named **RG-AZ104-LAB** in the **Canada Central** region using my Azure subscription. This Resource Group will serve as the central container for all Azure resources I deploy throughout my AZ-104 preparation, including virtual machines, virtual networks, storage accounts, monitoring resources, and identity management labs. I also learned how Azure organizes cloud resources into logical groups for easier administration, access control, cost management, and lifecycle management.

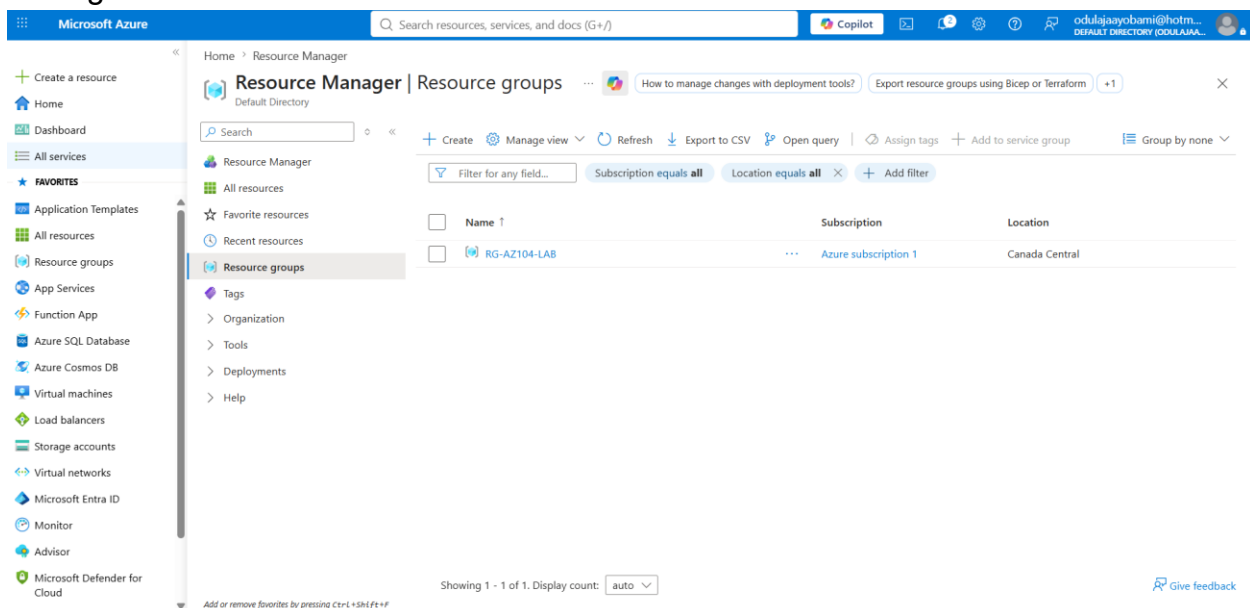


The screenshot shows the Microsoft Azure portal interface. The left sidebar contains navigation options like 'Create a resource', 'Home', 'Dashboard', 'All services', and 'FAVORITES'. The main content area is titled 'Resource Manager | Resource groups' and shows a table of resource groups. The table has columns for 'Name', 'Subscription', and 'Location'. One resource group is listed: 'RG-AZ104-LAB' under 'Azure subscription 1' in the 'Canada Central' region. The bottom of the page shows 'Showing 1 - 1 of 1. Display count: auto' and a 'Give feedback' link.

Name	Subscription	Location
RG-AZ104-LAB	Azure subscription 1	Canada Central

Creating a storage account

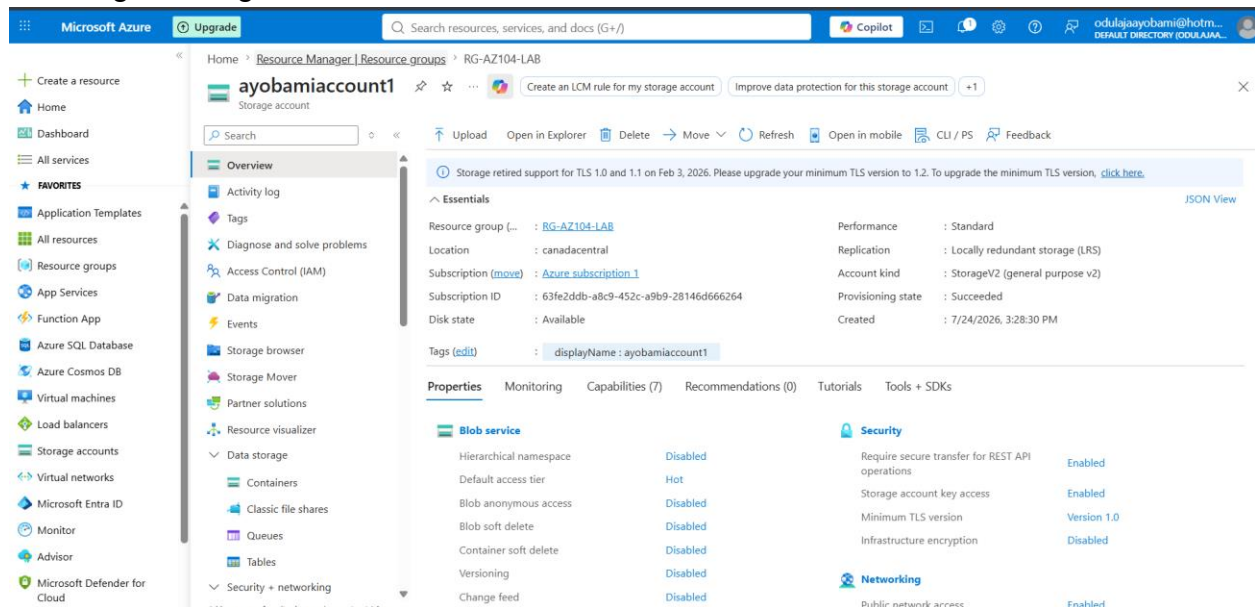


I enhanced the ARM template by parameterizing the storage account SKU. Rather than hardcoding the SKU, I defined a storageSKU parameter with a default value and a list of allowed values. I updated the resource definition to reference this parameter, enabling the same template to deploy storage accounts with different redundancy options without modifying the template itself. I successfully validated the deployment using an approved SKU and confirmed that ARM enforces input validation by rejecting unsupported values.

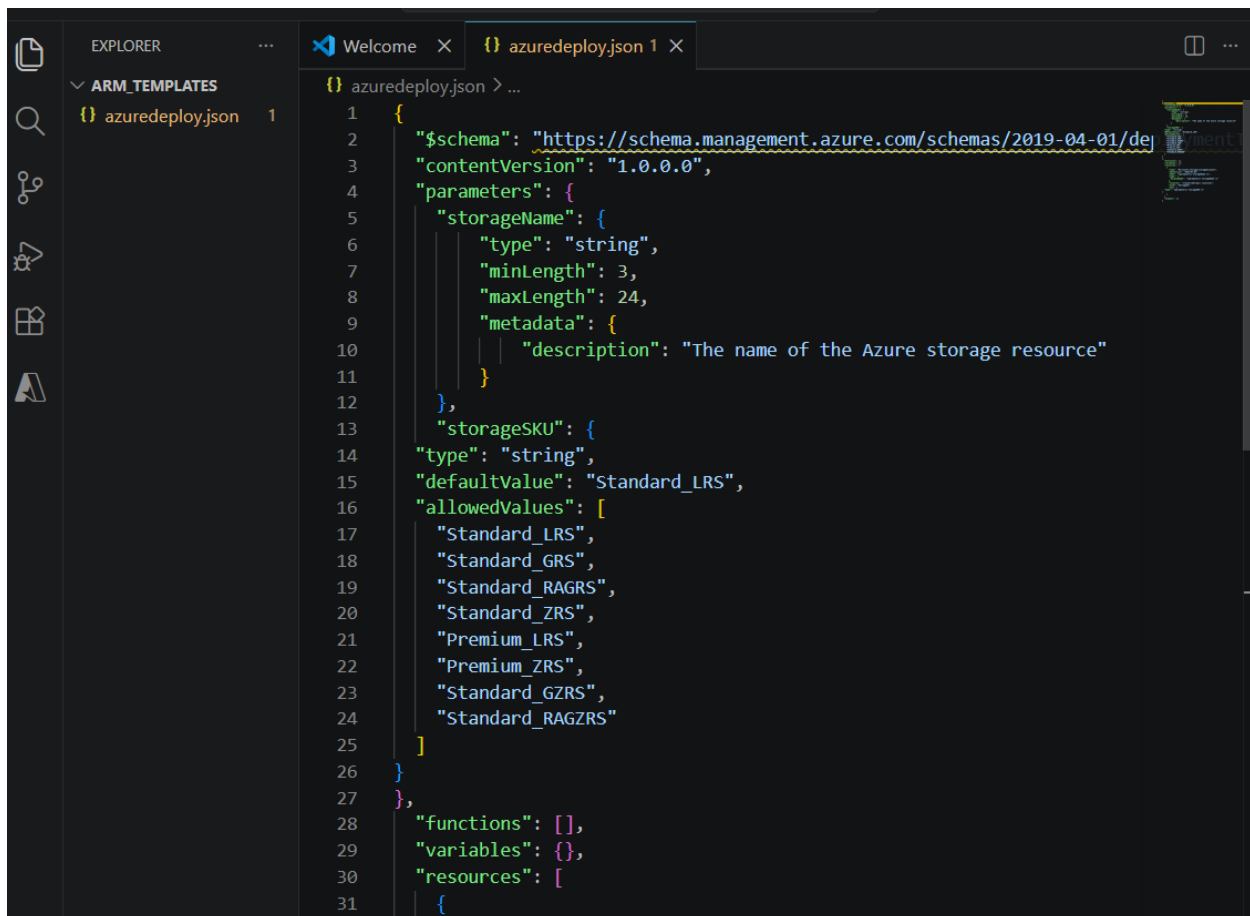

```
1 {
2   "$schema": "https://schema.management.azure.com/schemas/2019-04-01/deploymentTemplate.json#",
3   "contentVersion": "1.0.0.0",
4   "parameters": {
5     "storageName": {
6       "type": "string",
7       "minLength": 3,
8       "maxLength": 24,
9       "metadata": {
10        "description": "The name of the Azure storage resource"
11      }
12    },
13    "storageSKU": {
14      "type": "string",
15      "defaultValue": "Standard_LRS",
16      "allowedValues": [
17        "Standard_LRS",
18        "Standard_GRS",
19        "Standard_RAGRS",
20        "Standard_ZRS",
21        "Premium_LRS",
22        "Premium_ZRS",
23        "Standard_GZRS",
24        "Standard_RAGZRS"
25      ]
26    }
27  },
28  "functions": [],
29  "variables": {},
30  "resources": [
```

```
31    {
32      "type": "Microsoft.Storage/storageAccounts",
33      "apiVersion": "2025-01-01",
34      "name": "[parameters('storageName')]",
35      "tags": {
36        "displayName": "[parameters('storageName')]"
37      },
38      "location": "[resourceGroup().location]",
39      "kind": "StorageV2",
40      "sku": {
41        "name": "[parameters('storageSKU')]"
42      }
43    },
44  ],
45  "outputs": {}
46 }
```

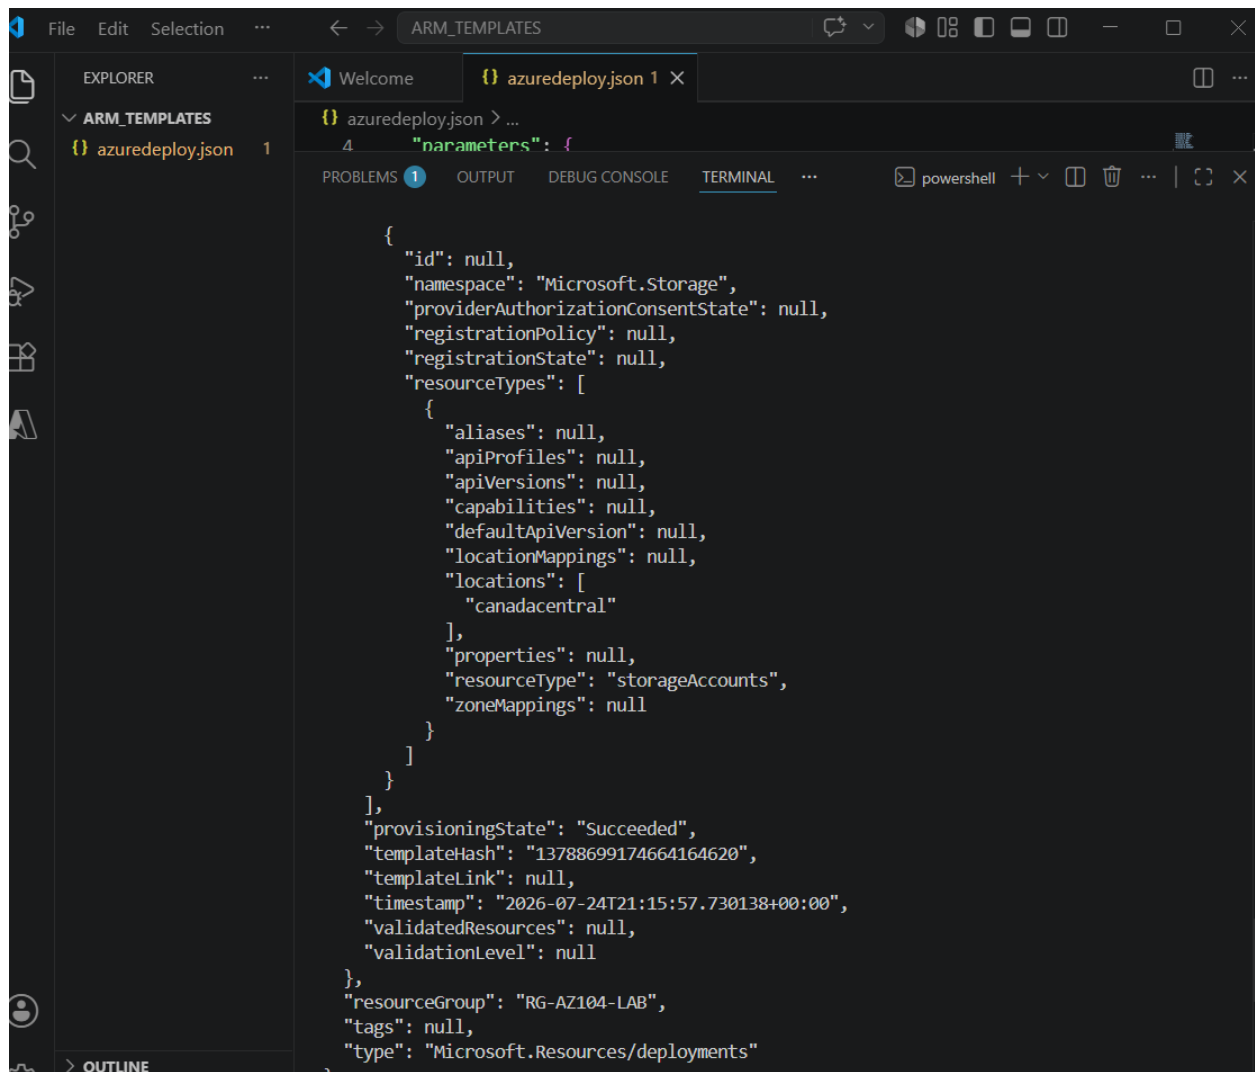


```
File Edit Selection ... ARM_TEMPLATES
Welcome {} azuredeploy.json 1 X
{} azuredeploy.json > ...
4 "parameters": {
  "id": null,
  "namespace": "Microsoft.Storage",
  "providerAuthorizationConsentState": null,
  "registrationPolicy": null,
  "registrationState": null,
  "resourceTypes": [
    {
      "aliases": null,
      "apiProfiles": null,
      "apiVersions": null,
      "capabilities": null,
      "defaultApiVersion": null,
      "locationMappings": null,
      "locations": [
        "canadacentral"
      ],
      "properties": null,
      "resourceType": "storageAccounts",
      "zoneMappings": null
    }
  ]
},
"provisioningState": "Succeeded",
"templateHash": "13788699174664164620",
"templateLink": null,
"timestamp": "2026-07-24T21:15:57.730138+00:00",
"validatedResources": null,
"validationLevel": null
},
"resourceGroup": "RG-AZ104-LAB",
"tags": null,
"type": "Microsoft.Resources/deployments"
```

I successfully deployed the template using a valid SKU (Standard_GRS) and then intentionally attempted a deployment with an invalid value (Basic). ARM template validation correctly rejected the deployment before any Azure resources were modified, demonstrating how input validation enforces deployment standards and prevents

configuration errors.

```
PS C:\Users\odula\iCloudDrive\Cybersecurity\Azure\ARM_TEMPLATES> $deploymentName="invalidSKUTest-$today"
PS C:\Users\odula\iCloudDrive\Cybersecurity\Azure\ARM_TEMPLATES>
PS C:\Users\odula\iCloudDrive\Cybersecurity\Azure\ARM_TEMPLATES> az deployment group create `
>
> --name $deploymentName `
> --template-file .\azuredeploy.json `
> --parameters storageName=ayobamiaccount1 storageSKU=Basic
{"code": "InvalidTemplate", "message": "Deployment template validation failed: 'The provided value for the template parameter 'storageSKU' is not valid. The value 'Basic' is not part of the allowed value(s): 'Standard_LRS,Standard_GRS,Standard_RAGRS,Standard_ZRS,Premium_LRS,Premium_ZRS,Standard_GZRS,Standard_RAGZRS'.'.", "additionalInfo": [{"type": "TemplateViolation", "info": {"lineNumber": 16, "linePosition": 20, "path": "properties.template.parameters.storageSKU.allowedValues"}}]}
PS C:\Users\odula\iCloudDrive\Cybersecurity\Azure\ARM_TEMPLATES> █
```

I successfully deployed an Azure Storage Account multiple times, demonstrated ARM's idempotent behavior, validated template parameters through both successful and failed deployments, and used the reference() function to return the storage account's primary service endpoints after deployment.

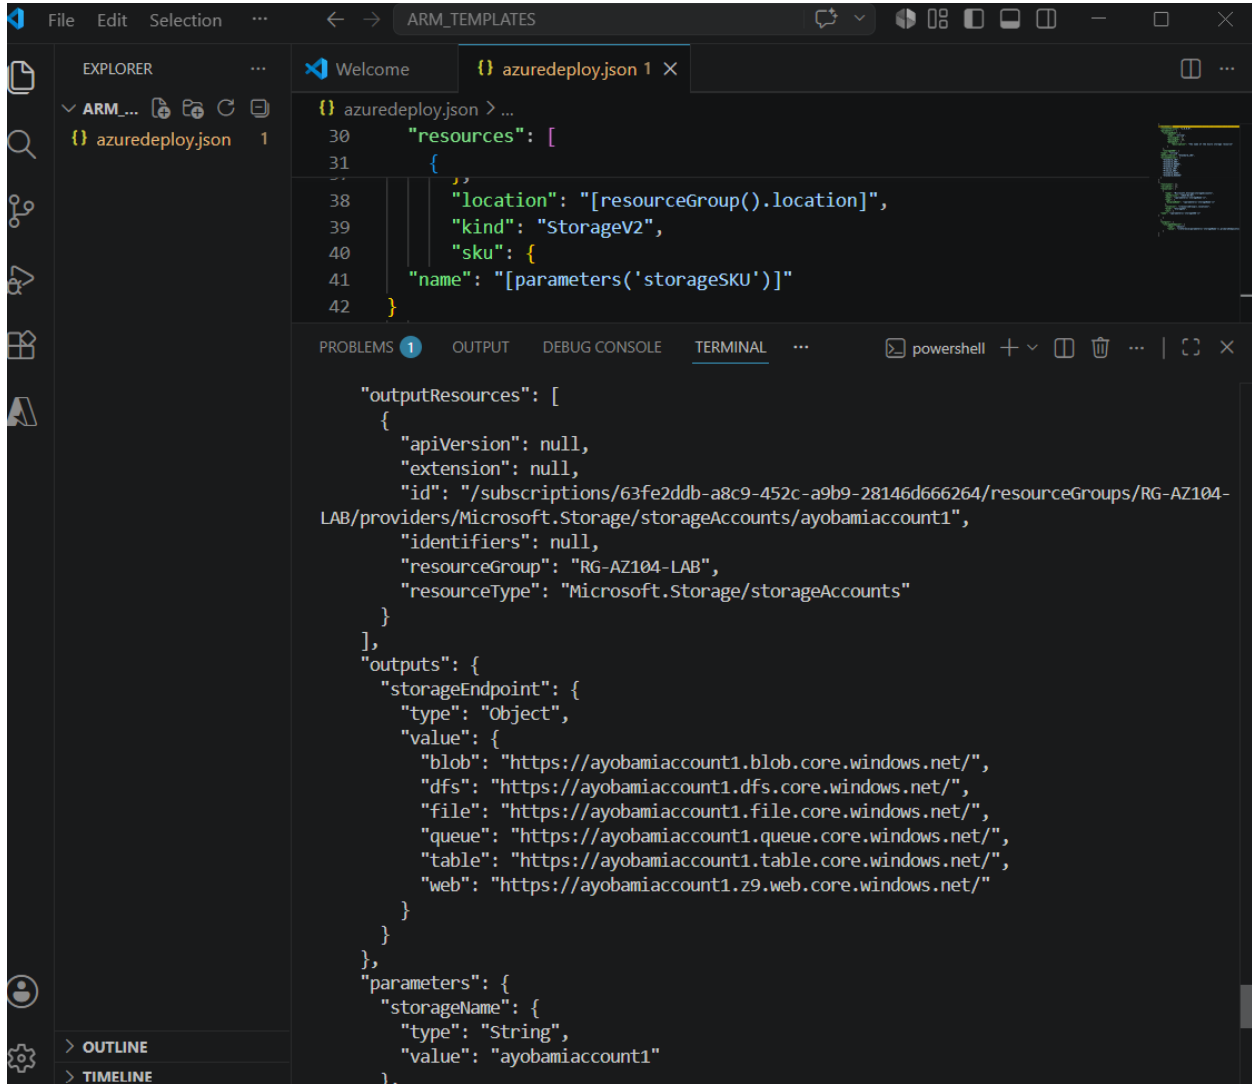

The screenshot shows the Visual Studio Code interface with an ARM template file named `azuredeploy.json` open. The Explorer pane on the left shows the file structure. The main editor displays the ARM template code, which defines a storage account resource. The `resources` array contains a single resource of type `Microsoft.Storage/storageAccounts` with the name `[parameters('storageSKU')]`. The `location` is set to `[resourceGroup().location]`. The `kind` is `StorageV2` and the `sku` is defined in the `sku` object. The `name` is `[parameters('storageSKU')]`. The `outputs` section defines a `storageEndpoint` output of type `Object` with a `value` object containing the primary endpoints for blob, dfs, file, queue, table, and web services. The `parameters` section defines a `storageName` parameter of type `String` with a value of `ayobamiaccount1`.

```
{} azuredeploy.json > ...
30  "resources": [
31    {
32      "location": "[resourceGroup().location]",
33      "kind": "StorageV2",
34      "sku": {
35        "name": "[parameters('storageSKU')]"
36      }
37    }
38  ],
39  "outputs": {
40    "storageEndpoint": {
41      "type": "Object",
42      "value": {
43        "blob": "https://ayobamiaccount1.blob.core.windows.net/",
44        "dfs": "https://ayobamiaccount1.dfs.core.windows.net/",
45        "file": "https://ayobamiaccount1.file.core.windows.net/",
46        "queue": "https://ayobamiaccount1.queue.core.windows.net/",
47        "table": "https://ayobamiaccount1.table.core.windows.net/",
48        "web": "https://ayobamiaccount1.z9.web.core.windows.net/"
49      }
50    }
51  },
52  "parameters": {
53    "storageName": {
54      "type": "String",
55      "value": "ayobamiaccount1"
56    }
57  }
58 }
```

The `OUTPUT` pane shows the deployment output, which includes the `storageEndpoint` output. The `value` object contains the primary endpoints for blob, dfs, file, queue, table, and web services.

```
"outputResources": [
  {
    "apiVersion": null,
    "extension": null,
    "id": "/subscriptions/63fe2ddb-a8c9-452c-a9b9-28146d666264/resourceGroups/RG-AZ104-LAB/providers/Microsoft.Storage/storageAccounts/ayobamiaccount1",
    "identifiers": null,
    "resourceGroup": "RG-AZ104-LAB",
    "resourceType": "Microsoft.Storage/storageAccounts"
  }
],
"outputs": {
  "storageEndpoint": {
    "type": "Object",
    "value": {
      "blob": "https://ayobamiaccount1.blob.core.windows.net/",
      "dfs": "https://ayobamiaccount1.dfs.core.windows.net/",
      "file": "https://ayobamiaccount1.file.core.windows.net/",
      "queue": "https://ayobamiaccount1.queue.core.windows.net/",
      "table": "https://ayobamiaccount1.table.core.windows.net/",
      "web": "https://ayobamiaccount1.z9.web.core.windows.net/"
    }
  }
},
"parameters": {
  "storageName": {
    "type": "String",
    "value": "ayobamiaccount1"
  }
}
```

Creating A new User

Creating a new group

Microsoft Azure



Home > Default Directory | Groups > Groups | All groups

New Group

Got feedback?

Group type *

Security

Group name *

Marketing

Group description

Enter a description for the group

Membership type

Assigned

Owners

1 owner selected

Members

1 member selected

Create

Deleting User

The screenshot shows the Microsoft Azure portal interface. The top navigation bar is blue with the 'Microsoft Azure' logo and a search icon. The breadcrumb trail indicates the current location: 'Home > Default Directory | Users'. The main heading is 'Users' with a sub-label 'Default Directory'. Below the heading, there are tabs for 'All users', 'Audit logs', 'Sign-in logs', 'Diagnose and solve problems', 'Deleted users', 'Password reset', 'User settings', 'Bulk operation results', 'Bulk operation results (Preview)', and 'New support request'. The 'All users' tab is selected. On the right side, there are buttons for 'New user', 'Edit', 'Delete', and a menu icon. A confirmation dialog box is open in the center, asking 'Delete the selected users?' with 'OK' and 'Cancel' buttons. Below the dialog, a table lists two users: 'Ayobami' (selected with a checkmark) and 'Ayobami Odulaja' (not selected). The footer of the portal includes the text 'Add or remove favorites by pressing Ctrl+Shift+F'.

Microsoft Azure

Home > Default Directory | Users

Users

Default Directory

+ New user Edit Delete ...


Delete the selected users?

OK Cancel

☒	 Ayobami	Ayo@odulajaayob...
☐	 Ayobami Odulaja	odulajaayobami_h...

Add or remove favorites by pressing Ctrl+Shift+F

Restoring user that was deleted

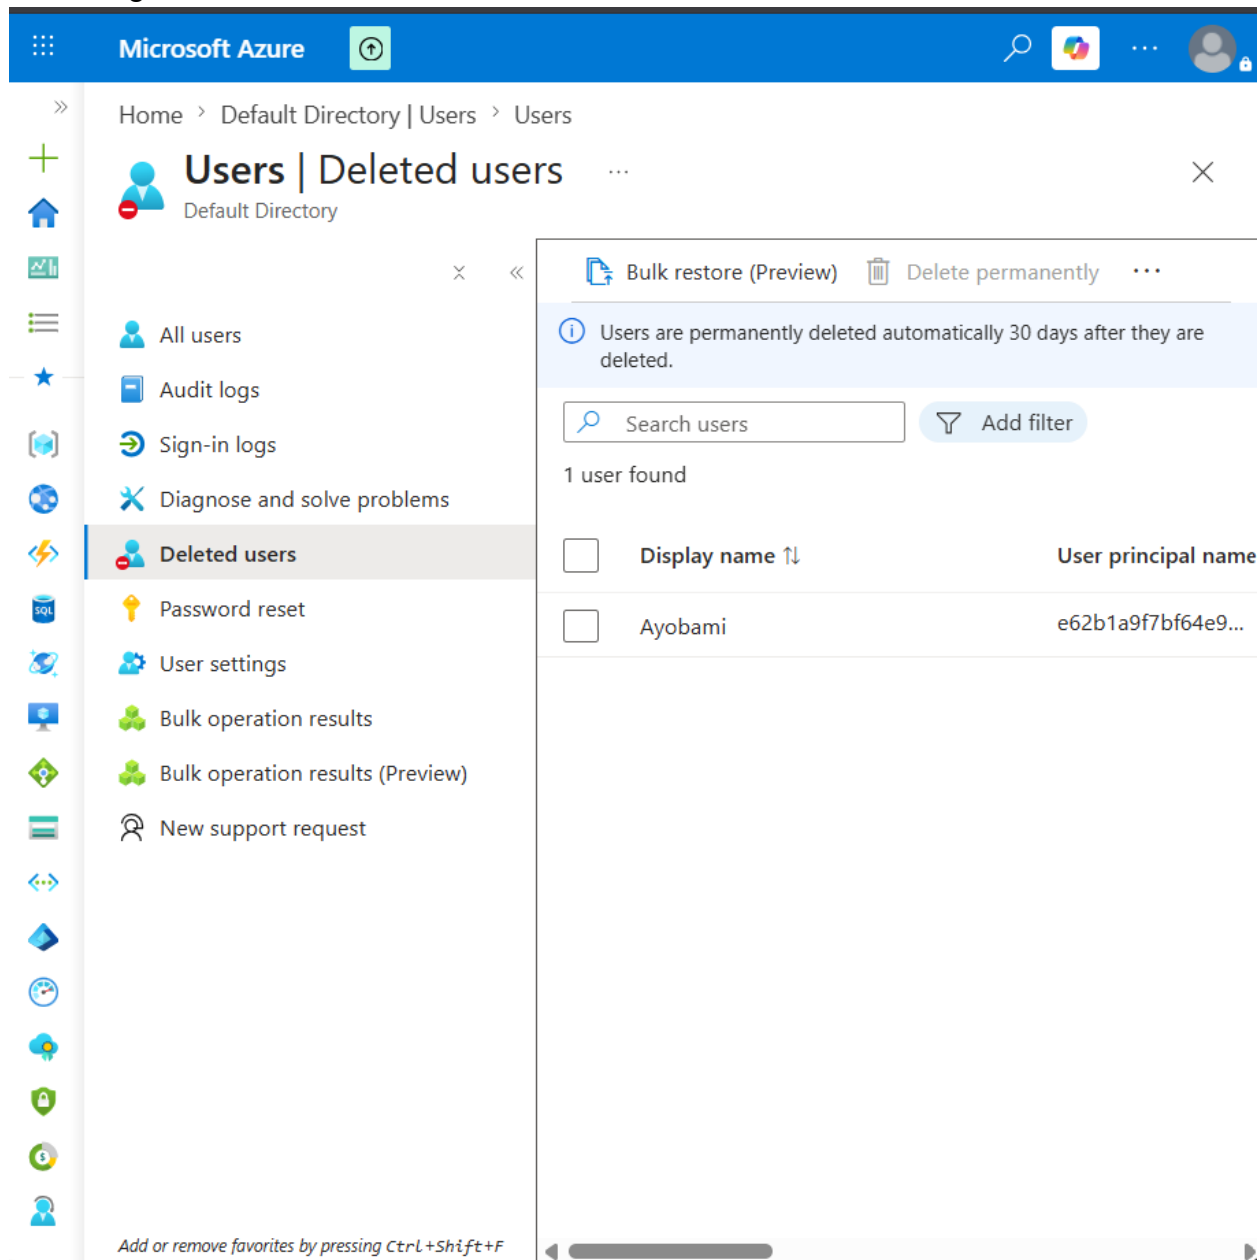

Microsoft Azure

Home > Default Directory | Users > Users

Users | Deleted users

Default Directory

Bulk restore (Preview) Delete permanently

Users are permanently deleted automatically 30 days after they are deleted.

Search users Add filter

1 user found

☐	Display name ↑↓	User principal name
☐	Ayobami	e62b1a9f7bf64e9...

Add or remove favorites by pressing Ctrl+Shift+F

Microsoft Azure

Upgrade

Search resources, services, and docs (G+)

Copilot

odulajaayobami@hotmail...
DEFAULT DIRECTORY (ODULAJAA...)

Create a resource

Home

Dashboard

All services

FAVORITES

Resource groups

App Services

Function App

Azure SQL Database

Azure Cosmos DB

Virtual machines

Load balancers

Storage accounts

Virtual networks

Microsoft Entra ID

Home > Default Directory | Users > Users

Users | Deleted users

Default Directory

Bulk restore (Preview)

Delete permanently

Restore users

Refresh

Manage view

Got feedback?

All users

Audit logs

Sign-in logs

Diagnose and solve problems

Deleted users

Password reset

User settings

Bulk operation results

Bulk operation results (Preview)

New support request

Restore user(s)

Restore selected user(s)?

OK

Cancel

☒	Display name	User principal name	User type	Deleted date time	Permanent deletion date	Objec
☒	Ayobami	e62b1a9f7b64e9...	Member	Jul 26, 2026, 6:58 PM	Aug 25, 2026, 6:58 PM	e62b1

Creating a Microsoft 365 group type

Microsoft Azure



Home > Default Directory | Groups > Groups | Overview

New Group

Got feedback?

Group type *

Microsoft 365

Group name *

Northwest Sales

Group email address *

NorthwestSales

@odulajaayobamihotmail.onmicrosoft.com

Group description

Group containing members of the Sales team in Northwest region

Membership type

Assigned

 Use group sensitivity labels in Microsoft Entra ID to classify and protect Microsoft 365 groups. [Learn more about assigning sensitivity labels in Microsoft Entra ID.](#)

Owners

1 owner selected

VIEWING PERMISSION FROM MY PROFILE

 Microsoft Azure 

  ... 

>>

Home

My permissions

 ... 

 Resource provider status  Refresh  Feedback

Subscription permissions

See your access to a subscription

Subscription:

Azure subscription 1 ▾

You have the following access:

- Your account 'odulajaayobami@hotmail.com' has been assigned the role 'Owner' (type BuiltInRole) and has access to [Azure subscription 1](#)

[Go to subscription access control \(IAM\)](#)

Role Assignment:

Home > Resource Manager | Resource groups > RG-AZ104-LAB

RG-AZ104-LAB | Access control (IAM)

Search

Overview

Activity log

Access control (IAM)

Tags

Resource visualizer

Events

Settings

Cost Management

Monitoring

Automation

Help

Check access

Role assignments

Roles

Deny assignments

Number of role assignments for this subscription

Privileged

1

View assignments

Search by name or email

Type: All

Role: All

Scope: All scopes

Group by: Role

All (1)

Job function roles (0)

Privileged administrator roles (1)

Name	Type	Role	Scope	Condition
Owner (1)				
Aycobami Odulaja c99d02cb-2fce-4683-920d-60f85d...	User	Owner	Subscription (inherited)	None

Showing 1 - 1 of 1 results.

Roles

RG-AZ104-LAB | Access control (IAM)

Search

Overview

Activity log

Access control (IAM)

Tags

Resource visualizer

Events

Settings

Cost Management

Monitoring

Automation

Help

Check access

Role assignments

Roles

Deny assignments

A role definition is a collection of permissions. You can use the built-in roles or you can create your own custom roles. [Learn more](#)

All

Job function roles

Privileged administrator roles

Search by role name, description, permission, or ID

Type: All

Category: All

Name	Description	Type	Category	Details
☐ Owner	Grants full access to manage all resources, including the ability to assign roles in Azure RBAC.	BuiltInRole	General	View ...
☐ Contributor	Grants full access to manage all resources, but does not allow you to assign roles in Azure RBAC, ma...	BuiltInRole	General	View ...
☐ Reader	View all resources, but does not allow you to make any changes.	BuiltInRole	General	View ...
☐ Access Review Operator Service Role	Lets you grant Access Review System app permissions to discover and revoke access as needed by th...	BuiltInRole	None	View ...
☐ AcrDelete	acr delete	BuiltInRole	Containers	View ...
☐ AcrImageSigner	Planned DEPRECATION on March 31, 2028. Grant the signing permission for content trust. As content...	BuiltInRole	Containers	View ...
☐ AcrPull	acr pull	BuiltInRole	Containers	View ...
☐ AcrPush	acr push	BuiltInRole	Containers	View ...
☐ AcrQuarantineReader	acr quarantine data reader	BuiltInRole	Containers	View ...
☐ AcrQuarantineWriter	acr quarantine data writer	BuiltInRole	Containers	View ...
☐ Advisor Recommendations Contributor	View assessment recommendations, accepted review recommendations, and manage the recommen...	BuiltInRole	None	View ...
☐ Advisor Recommendations Contributor...	View assessment recommendations, accepted review recommendations, and manage the recommen...	BuiltInRole	None	View ...
☐ Advisor Reviews Contributor	View reviews for a workload and triage recommendations linked to them.	BuiltInRole	None	View ...
☐ Advisor Reviews Reader	View reviews for a workload and recommendations linked to them.	BuiltInRole	None	View ...

Add Role Assignment:

Home > Resource Manager > Resource groups > RG-AZ104-LAB > Access control (IAM)

Add role assignment

Role Members Conditions Review + assign

A role definition is a collection of permissions. You can use the built-in roles or you can create your own custom roles. [Learn more](#) ⓘ

[Copilot can help pick a role](#)

Job function roles Privileged administrator roles

Grant access to Azure resources based on job function, such as the ability to create virtual machines.

Search by role name, description, permission, or ID Type: All Category: All

Name ↑	Description ↑	Type ↑	Category ↑	Details
Reader	View all resources, but does not allow you to make any changes.	BuiltInRole	General	View
AcrDelete	acr delete	BuiltInRole	Containers	View
AcrImageSigner	Planned DEPRECATION on March 31, 2028. Grant the signing permission for content trust. As content trust is being deprecated and will ...	BuiltInRole	Containers	View
AcrPull	acr pull	BuiltInRole	Containers	View
AcrPush	acr push	BuiltInRole	Containers	View
AcrQuarantineReader	acr quarantine data reader	BuiltInRole	Containers	View
AcrQuarantineWriter	acr quarantine data writer	BuiltInRole	Containers	View
Advisor Recommendations Contributor	View assessment recommendations, accepted review recommendations, and manage the recommendations lifecycle (mark recommend...	BuiltInRole	None	View
Advisor Recommendations Contributor (Assessments...	View assessment recommendations, accepted review recommendations, and manage the recommendations lifecycle (mark recommend...	BuiltInRole	None	View
Advisor Reviews Contributor	View reviews for a workload and triage recommendations linked to them.	BuiltInRole	None	View
Advisor Reviews Reader	View reviews for a workload and recommendations linked to them.	BuiltInRole	None	View
AgFood Platform Dataset Admin	Provides access to Dataset APIs	BuiltInRole	None	View
AgFood Platform Sensor Partner Contributor	Provides contribute access to manage sensor related entities in AgFood Platform Service	BuiltInRole	None	View
AgFood Platform Service Admin	Provides admin access to AgFood Platform Service	BuiltInRole	AI + Machine Learning	View

Grant access using Azure RBAC and Azure portal:

- First I want to create a test user:

Microsoft Azure Upgrade Search resources, services, and docs (G+//) Copilot odulajayobami@hote... DEFAULT DIRECTORY ODUAJA...

Users

Default Directory

+ New user Edit Delete Download users (Preview) Bulk operations Refresh Manage view Per-user MFA Got feedback?

Create new user Create a new internal user in your organization

Invite external user Invite an external user to collaborate with your organization

User principal name	User type	Is Agent	On-premises sy...	Identities	Company name	Creation type
Ayo@odulajayob...	Member	No	No	odulajayobami@hotmail.com		
Ayoibami Odulaja	Member	No	No	MicrosoftAccount		

Create new user

Create a new internal user in your organization

[Basics](#) [Properties](#) [Assignments](#) [Review + create](#)

Create a new user in your organization. This user will have a user name like `alice@contoso.com`. [Learn more](#)

Identity

User principal name * @ [Domain not listed? Learn more](#)

Mail nickname *
☒ Derive from user principal name

Display name *

Password * [Auto-generate password](#)

Account enabled ☒

Microsoft Azure

Upgrade

Search resources, services, and docs (0/0)

Copilot

odulajaayobamihotmail...
DEFAULT DIRECTORY: ODULAJA...

Home > Default Directory | Users

Users

Default Directory

All users

Search users

Add filter

3 users found

	Display name	User principal name	User type	Is Agent	On-premises sy...	Identities	Company name	Creation type
☐	Ayobami	Ayo@odulajaayob...	Member	No	No	odulajaayobamihotmail.onmicr...		
☐	Ayobami Odulaja	odulajaayobami_h...	Member	No	No	MicrosoftAccount		
☐	Lab User	labuser@odulaja...	Member	No	No	odulajaayobamihotmail.onmicr...		

Give Lab User Access to Resources:

Assigning user as a virtual machine contributor:

The image shows two screenshots of the Microsoft Azure portal interface, illustrating the process of assigning a role to a user.

Top Screenshot: Search for Role

The user is in the 'Add role assignment' wizard, step 1: 'Select a role'. The search bar contains 'virtual machine contributor'. The results show the 'Virtual Machine Contributor' role selected.

Name	Description	Type	Category	Details
Classic Virtual Machine Contributor	Lets you manage classic virtual machines, but not access to them, and not the virtual network or storage account they're connected to.	Built-in role	Compute	View
Desktop Virtualization Power On Contributor	Provide permission to the Azure Virtual Desktop Resource Provider to start virtual machines.	Built-in role	None	View
Desktop Virtualization Power On Contributor	Provide permission to the Azure Virtual Desktop Resource Provider to start and stop virtual machines.	Built-in role	None	View
Desktop Virtualization Virtual Machine Contributor	This role is in preview and subject to change. Provide permission to the Azure Virtual Desktop Resource Provider to create, delete, update, start, and stop virt...	Built-in role	None	View
Service Fabric Cluster Contributor	Manage your Service Fabric Cluster resources. Includes clusters, application types, application type versions, applications, and services. You will need additio...	Built-in role	None	View
Virtual Machine Contributor	Lets you manage virtual machines, but not access to them, and not the virtual network or storage account they're connected to.	Built-in role	Compute	View

Showing 1 - 6 of 6 results.

Bottom Screenshot: Assign Role

The user is in the 'Add role assignment' wizard, step 2: 'Assign access to'. The 'Selected role' is 'Virtual Machine Contributor'. The 'Assign access to' section shows 'User, group, or service principal' selected. The 'Members' section shows the 'Lab User' assigned.

Name	Object ID	Type
Lab User	bc141737-d9de-4bf7-975e-b033c2aeff97	User

The 'Description' field is optional and currently empty.

Confirming Role Assignment

Create a resource

Home

Dashboard

All services

FAVORITES

Application Templates

All resources

Resource groups

App Services

Function App

Azure SQL Database

Azure Cosmos DB

Virtual machines

Load balancers

Storage accounts

Virtual networks

Microsoft Entra ID

Monitor

Advisor

Microsoft Defender for Cloud

Cost Management + Billing

Help + support

Home > Resource Manager > Resource groups > RG-AZ104-LAB

Resource Manager

Default Directory

Search

Create

Manage view

All resources

Favorite resources

Recent resources

Resource groups

Tags

Organization

Tools

Deployments

Help

RG-AZ104-LAB | Access control (IAM)

Resource group

Search

Add

Download role assignments

Edit columns

Refresh

Delete

Feedback

Overview

Activity log

Access control (IAM)

Tags

Resource visualizer

Events

Settings

Cost Management

Monitoring

Automation

Help

Check access

Role assignments

Roles

Deny assignments

Number of role assignments for this subscription

2

4000

Privileged

1

View assignments

Search by name or email

Type: All

Role: All

Scope: All scopes

Group by: Role

All (2)

Job function roles (1)

Privileged administrator roles (1)

Name

Type

Role

Scope

Condition

Owner (1)

Apurba Odulga

c98d02b-26e-4683-9...

User

Owner

Subscription (Inherited)

None

Virtual Machine Contributor (1)

Lab User

bc141737-d95d-4bdf...

User

Virtual Machine Contributor

This resource

None

Showing 1 - 2 of 2 results.

Viewing activity Log

Create a resource

Home

Dashboard

All services

FAVORITES

Application Templates

All resources

Resource groups

App Services

Function App

Azure SQL Database

Azure Cosmos DB

Virtual machines

Load balancers

Storage accounts

Virtual networks

Microsoft Entra ID

Monitor

Advisor

Microsoft Defender for Cloud

Cost Management + Billing

Help + support

Home

Monitor

Monitor | Activity log

Activity

Alerts

Metrics

Observability agents (preview)

Issues

Logs

Change Analysis

Service health

Workbooks

Dashboards with Grafana

Insights

Managed Services

Settings

Support + Troubleshooting

Microsoft Azure

Upgrade

Search resources, services, and docs (0+)

Copilot

odulajayobami@hotmail.com

Default Directory: ODULAJA...

Looking for Log Analytics? In Log Analytics you can search for performance, diagnostics, health logs, and more. [Visit Log Analytics](#)

Search

Quick insights

Management Group: None

Subscription: Azure subscription 1

Event severity: All

Timespan: Last 6 hours

Add Filter

1 item.

Operation name	Status	Time	Time stamp	Subscription	Event initiated by
Create role assignment	Succeeded	10 minutes ...	Wed Jul 29 ...	Azure subscription 1	odulajayobami@hotmail...

Add or remove filters by pressing Ctrl + A (or Ctrl + V)

Microsoft Azure

Upgrade

Search resources, services, and docs (0+)

Copilot

odulajayobami@hotmail.com

Default Directory: ODULAJA...

Home

Monitor

Monitor | Activity log

Activity

Alerts

Metrics

Observability agents (preview)

Issues

Logs

Change Analysis

Service health

Workbooks

Dashboards with Grafana

Insights

Managed Services

Settings

Support + Troubleshooting

Looking for Log Analytics? In Log Analytics you can search for performance, diagnostics, health logs, and more. [Visit Log Analytics](#)

Search

Quick insights

Management Group: None

Subscription: Azure subscription 1

Event severity: All

Timespan: Last 6 hours

2 items.

Operation name	Status	Time
Create role assignment	Succeeded	10 minutes ...
Create role assignment	Started	10 minutes ...

Create role assignment


Wed Jul 29 2026 11:32:36 GMT-0400 (Eastern Daylight Time)

+ New alert rule


Summary	JSON	Change history
Resource	/subscriptions/63fa2d8b-a809-452c-a969-28146d66264/resourceGroups/RC-A2104-LAB/providers/Microsoft.Authorization/roleAssignments/aa36418-6c59-496f-b5ea-0239971b4eb8	
Operation name	Create role assignment	
Time stamp	Wed Jul 29 2026 11:32:36 GMT-0400 (Eastern Daylight Time)	
Event initiated by	odulajayobami@hotmail.com	
Message	-	
Role	-	
Scope	-	

Setting up Password reset by rolling out SSPR

Creating a Security group

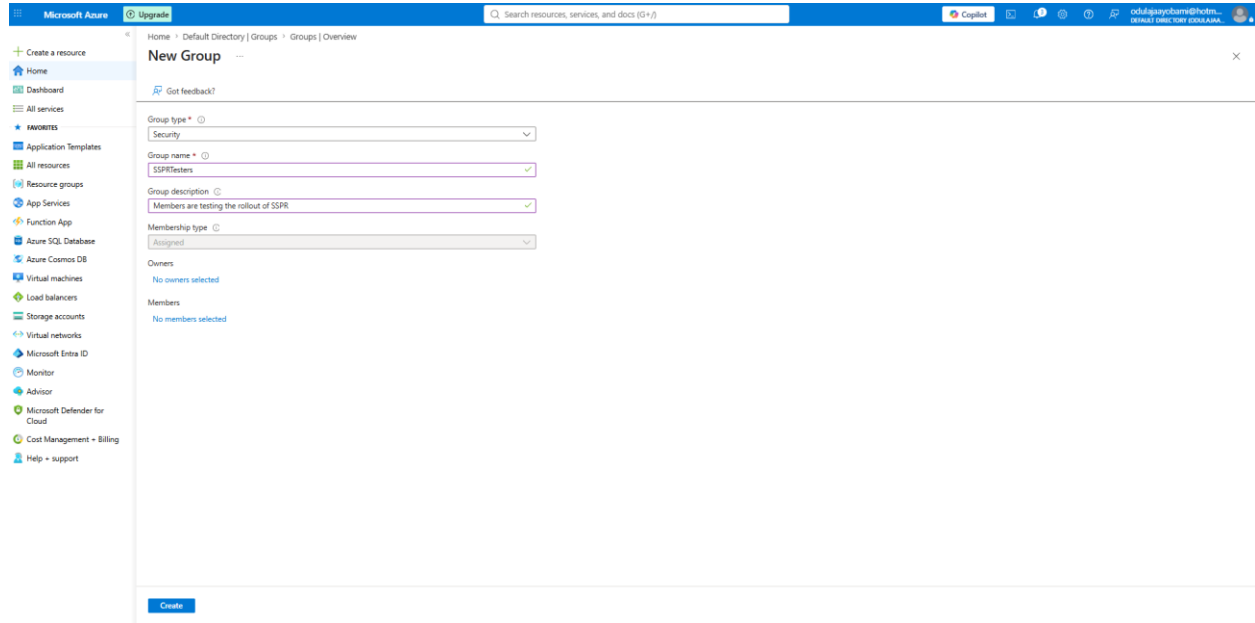

Adding Lab User to SSPRTester

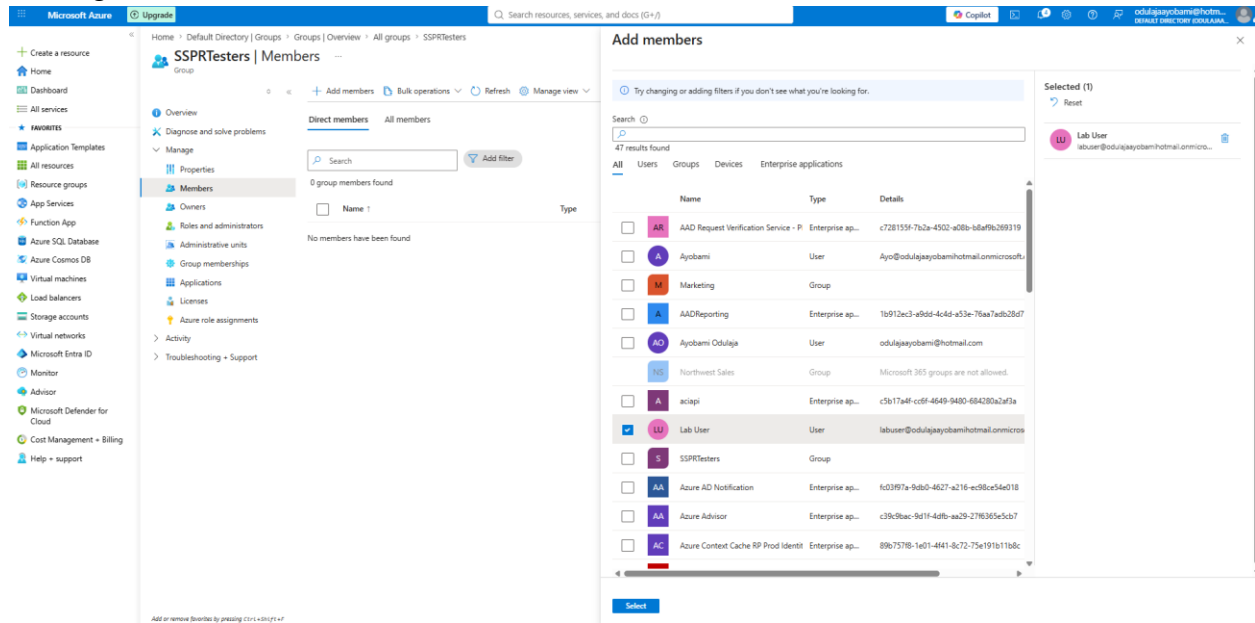

Enabling SSPR

The screenshot displays the Microsoft Azure portal interface. The top navigation bar includes the 'Microsoft Azure' logo, an 'Upgrade' button, a search bar, and a user profile. The left sidebar contains a navigation menu with categories like 'Create a resource', 'Home', 'Dashboard', 'All services', 'FAVORITES', 'Application Templates', 'All resources', 'Resource groups', 'App Services', 'Function App', 'Azure SQL Database', 'Azure Cosmos DB', 'Virtual machines', 'Load balancers', 'Storage accounts', 'Virtual networks', 'Microsoft Entra ID', 'Monitor', 'Advisor', 'Microsoft Defender for Cloud', 'Cost Management + Billing', and 'Help + support'. The main content area is titled 'Default Directory | Password reset' and features a 'Get a free Premium trial to use this feature' banner. Below this, the 'Self-Service Password Reset' section is shown, including a description, a 'Why use self-service password reset?' heading, and four key benefits: 'REDUCE COST' (Support-assisted password reset is typically 20% of organization's IT spend), 'IMPROVE USER EXPERIENCES' (Users don't want to call helpdesk and spend an hour on the phone every time they forget their passwords), 'LOWER HELPDESK VOLUME' (Password Management is the single largest helpdesk driver for most organizations), and 'ENABLE MOBILITY' (Users can reset their passwords from wherever they are). A 'Get Free Premium Trial' button is located at the bottom of the main content area.

Microsoft Azure Upgrade Search resources, services, and docs (0+)

Home > Default Directory

Default Directory | Password reset

Get a free Premium trial to use this feature →

Self-Service Password Reset

This feature includes a set of capabilities that allow your users to manage any password from any device, at any time, from any location, while remaining in compliance with the security policies you define.

Why use self-service password reset?

- REDUCE COST**
Support-assisted password reset is typically 20% of organization's IT spend
- IMPROVE USER EXPERIENCES**
Users don't want to call helpdesk and spend an hour on the phone every time they forget their passwords
- LOWER HELPDESK VOLUME**
Password Management is the single largest helpdesk driver for most organizations
- ENABLE MOBILITY**
Users can reset their passwords from wherever they are

Get Free Premium Trial

Add or remove favorites by pressing ctrl + 1 or 2

Customize directory branding

The screenshot displays the Microsoft Azure portal interface for customizing directory branding. The top navigation bar includes the Microsoft Azure logo, an 'Upgrade' button, a search bar, and a user profile. The left sidebar lists various services and resources. The main content area is titled 'Default Directory | Company branding' and contains a 'Got feedback?' link and a notification about the 'Keep me signed in' setting. The page is divided into two main sections: 'Customize your end user experiences' and 'Customize default sign-in experience'.

Customize your end user experiences

Use your organization's logo and custom color schemes to provide a consistent look-and-feel on your Microsoft Entra ID sign-in pages. [Learn more](#)

Default sign-in experience

Customize the default sign-in experience to personalize the sign-in page for anyone signing-in to your tenant. [Customize](#)

Customize by browser language

Customize sign-in experiences by browser language for different groups of users. Customizing your browser language settings will override the default sign-in experience. [Add browser language](#)

Customize default sign-in experience

Basics Layout Header Footer Sign-in form Review

Customize the default sign-in experience to personalize the sign-in page for anyone signing-in to your tenant.

Background

Upload background image, favicon or choose background color.

Favicon

[Select file](#) [Browse](#)

Image size: 32x32px (resizable)
Max file size: 5KB
File Type: PNG (preferred), JPG, or JPEG

Background image

[Select file](#) [Browse](#)

Image will appear darkened to improve contrast and legibility.
Image size: 1600x1080px
Max file size: 300KB
File Type: PNG, JPG, or JPEG

Page background color

Not provided

[Previous](#) [Next: Layout](#)

AZURE VIRTUAL NETWORK

Create a Virtual Network

Microsoft Azure Upgrade Search resources, services, and docs (G+/) Copilot

Home > Resource Manager | All resources > Create a resource > Marketplace

Virtual network

Microsoft

Microsoft | Azure Service
★ 4.6 (36 ratings)

Azure benefit eligible

Subscription: Azure subscription 1 Plan: Virtual network [Create](#)

Virtual networks make it easy for you to take advantage of the scalable, on-demand infrastructure of Azure while providing connectivity to data and applications on-premises, including systems running on Windows Server, mainframes, and UNIX.

Use Virtual Network to:

- Extend your datacenter
- Build distributed applications
- Remotely debug your applications

More products from Microsoft [See All](#)

Active Directory Health Check

Microsoft

Azure Service

Assess the risk and health of Active Directory environments.

Create

AD Replication Status

Microsoft

Azure Service

Identify Active Directory replication issues in your environment.

Create

Device Update for IoT Hub

Microsoft

Azure Service

Securely and Reliably update your devices with Device Update for IoT Hub.

Create

Front Door and CDN profiles

Microsoft

Azure Service

Azure Front Door and CDN profiles is security-led, modern cloud CDN that provides static and dynamic content...

Create

Create virtual network ...

- Basics
- Security
- Address space
- Tags
- Review + create

Azure Virtual Network (VNet) is the fundamental building block for your private network in Azure. VNet enables many types of Azure resources, such as Azure Virtual Machines (VM), to securely communicate with each other, the internet, and on-premises networks. VNet is similar to a traditional network that you'd operate in your own data center, but brings with it additional benefits of Azure's infrastructure such as scale, availability, and isolation.

[Learn more.](#)

Project details

Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

Subscription *

Azure subscription 1

Resource group *

RG-AZ104-LAB

[Create new](#)

Instance details

Virtual network name *

VNET-AZ104-LAB

Region * ⓘ

(Canada) Canada Central

[Deploy to an Azure Extended Zone](#)

Create virtual network ...

Basics Security Address space Tags Review + create

Enhance the security of your virtual network with these additional paid security services. [Learn more](#) 

Virtual network encryption

Enable Virtual network encryption to encrypt traffic traveling within the virtual network. Virtual machines must have accelerated networking enabled. Traffic to public IP addresses is not encrypted. [Learn more](#). 

Virtual network encryption ☐

Azure Bastion

Azure Bastion is a paid service that provides secure RDP/SSH connectivity to your virtual machines over TLS. When you connect via Azure Bastion, your virtual machines do not need a public IP address. [Learn more](#). 

Enable Azure Bastion  ☐

Azure Firewall

Azure Firewall is a managed cloud-based network security service that protects your Azure Virtual Network resources. [Learn more](#). 

Enable Azure Firewall  ☐

Azure DDoS Network Protection

Azure DDoS Network Protection is a paid service that offers enhanced DDoS mitigation capabilities via adaptive tuning, attack notification, and telemetry to protect against the impacts of a DDoS attack for all protected resources within this virtual network. [Learn more](#). 

Enable Azure DDoS Network Protection  ☐

Previous

Next

Review + create

Create virtual network ...

- Basics
- Security
- Address space
- Tags
- Review + create

Virtual network address space

Define the address space of your virtual network with one or more IPv4 or IPv6 address ranges. Create subnets to segment the virtual network address space into smaller ranges for use by your applications. When you deploy resources into a subnet, Azure assigns the resource an IP address from the subnet. [Learn more](#)

☐ Allocate using IP address pools. [Learn more](#)

+ Add a subnet

10.0.0.0/16

Delete address space

Starting address

Size

10.0.0.0

/16

10.0.0.0 - 10.0.255.255

65,536 addresses

Subnets	IP address range	Size	NAT gateway
default	10.0.0.0 - 10.0.0.255	/24 (256 addresses)	-


Add IPv4 address space |

Advertised address prefixes

Advertised gateway prefixes let you control route advertisements by specifying which IP address ranges Azure gateways advertise to on premises networks, instead of advertising all virtual network and spoke CIDRs.

+ Add IPv4 address prefix + Add IPv6 address prefix

IP version	Starting address	Size
------------	------------------	------

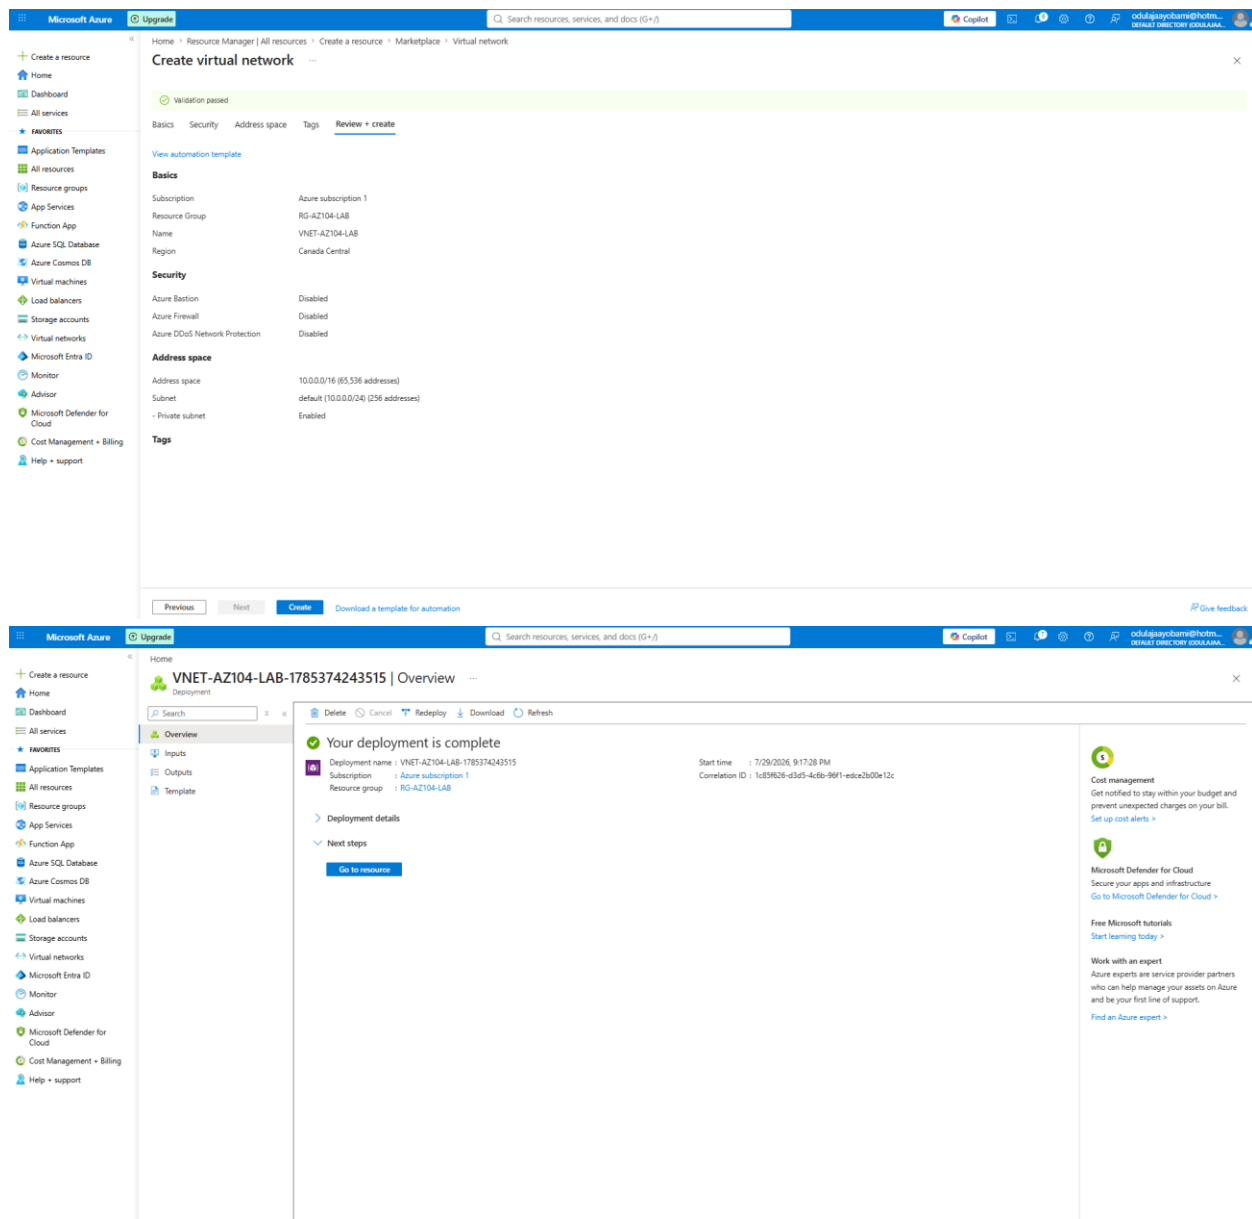

I learned that an Azure Virtual Network (VNet) is the logical foundation for networking in Azure. It provides a private, isolated network where Azure resources such as virtual machines, databases, and storage accounts can communicate securely. Each VNet is assigned a unique CIDR address space, can be divided into subnets for better organization, and can connect securely to other VNets or on-premises networks using VPNs or other connectivity options. Proper planning of address spaces is essential to avoid overlapping IP ranges when connecting networks.

Create and Configure Virtual Networks

My organization is migrating a web-based application to Azure. Your first task is to put in place the virtual networks and subnets. You also need to securely peer the virtual networks. You identify these requirements.

- Two virtual networks are required, app-vnet and hub-vnet. The virtual networks simulate a hub and spoke network architecture.
- The app-vnet hosts the application. The app-vnet virtual network requires two subnets. The frontend subnet hosts the web servers. The backend subnet hosts the database servers.
- The hub-vnet only requires a subnet for the firewall.
- The two virtual networks must be able to communicate with each other securely and privately through virtual network peering.
- Both virtual networks should be in the same region.

Hub-and-Spoke Architecture

Create app-vnet and its subnets

The screenshot shows the 'Create virtual network' wizard in the Azure portal, specifically the 'Review + create' step. The interface includes a left-hand navigation pane with various Azure services, a top search bar, and a main content area with tabs for 'Basics', 'Security', 'Address space', and 'Tags'. The 'Review + create' tab is active, displaying a summary of the configuration. A green 'Validation passed' banner is at the top of the main content area. The configuration details are as follows:

Section	Property	Value
Basics	Subscription	Azure subscription 1
	Resource Group	RG-AZ104-LAB
	Name	app-vnet
Basics	Region	Canada Central
	Security	
Security	Azure Bastion	Disabled
	Azure Firewall	Disabled
	Azure DDoS Network Protection	Disabled
Address space	Address space	
	Address space	10.1.0.0/16 (65,536 addresses)
	Subnet	frontend (10.1.0.0/24) (256 addresses)
	- Private subnet	Enabled
	Subnet	backend (10.1.1.0/24) (256 addresses)
- Private subnet	Enabled	
Tags	Tags	

At the bottom of the wizard, there are navigation buttons: 'Previous', 'Next', and 'Create'. A link 'Download a template for automation' is also present. The 'Create' button is highlighted in blue. In the bottom right corner, there is a 'Give feedback' link.

Hub-Vnet and its subnet

Home > Network foundation | Virtual networks

Create virtual network...

✔ Validation passed

BasicsSecurityAddress spaceTagsReview + create

[View subscription template](#)

Basics

Subscription

Azure subscription 1

Resource Group

RG-AZ104-LAB

Name

hub-net

Region

Canada Central

Security

Azure Bastion

Disabled

Azure Firewall

Disabled

Azure DDoS Network Protection

Disabled

Address space

Address space

10.0.0.0/16 (65,536 addresses)

Subnet

AzureFirewallSubnet (10.0.0.0/26) (64 addresses)

- Private subnet

Enabled

Tags

Previous

Next

Create

[Download a template for automation](#)

Virtual Networks

Home > Network foundation

Network foundation | Virtual networks

Preview

Search

+ Create Manage view Refresh Export to CSV Open query Assign tags Add to service group Group by none

Virtual network

Virtual Network overview

Virtual networks

NAT gateways

Public IP addresses

Network interfaces

Network security groups

Application security groups

Bastions

Route tables

Route servers

Private Link

DNS

Related services

Monitoring and management

Name	Resource Group	Location	Subscription
app-vnet	RG-AZ104-LAB	Canada Central	Azure subscription 1
hub-net	RG-AZ104-LAB	Canada Central	Azure subscription 1

Showing 1 - 2 of 2. Display count: auto

Give feedback

Virtual Peering

Home > Network foundation | Virtual networks > app-vnet

Network foundation | Virtual networks

Preview

Search

+ Create Manage view

Virtual network

Virtual Network overview

Virtual networks

NAT gateways

Public IP addresses

Network interfaces

Network security groups

Application security groups

Bastions

Route tables

Route servers

Private Link

DNS

Related services

Monitoring and management

app-vnet | Peerings

Virtual network

Search

+ Add Refresh Export to CSV Delete Sync

Virtual network peering enables you to seamlessly connect two or more virtual networks in Azure. The virtual networks appear as one for connectivity purposes. [Learn more](#)

Filter by name...

Showing all 1 items


Name	Peering s...	Peer...	Remo...	Virtu...	Cross-tenant
hub-to-ap...	Fully Synchronized	Connected	hub-net	Disabled	No

Showing 1 - 2 of 2. Display count: auto

Give feedback

Implementing a Virtual Network

Architecture diagram

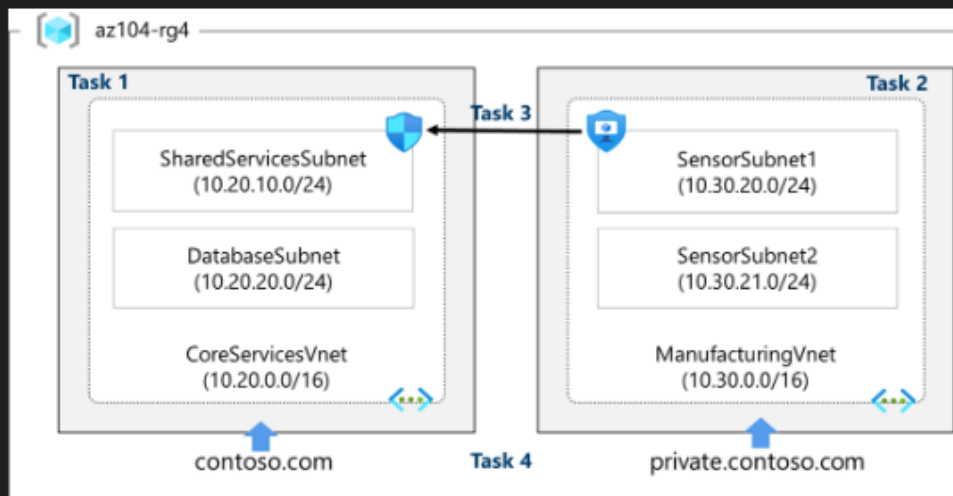

Job skills

- Create a virtual network with subnets using the portal.
- Create a virtual network and subnets using a template.
- Create and configure communication between an Application Security Group and a Network Security Group.
- Configure public and private Azure DNS zones. (optional)

»

Home

+

Home

Deployment

Search

Overview

Inputs

Outputs

Template

CoreServiceVnet-1785523335602 | Overview

Deployment

Delete Cancel Redeploy Download Refresh

Deployment is in progress

Deployment name : CoreServiceVnet-1785523335602

Subscription : [Azure subscription 1](#)

Resource group : [RG-AZ104-LAB](#)

Start time : 7/31/2026, 2:42:16 PM

Correlation ID : 9f982bbd-ab85-448f-aa0a-4076ce709f50

Deployment details

Resource	Type	SI
✓ CoreServiceVnet	Virtual network	O

Microsoft Defender for Cloud

Secure your apps and infrastructure

[Go to Microsoft Defender for Cloud >](#)

Free Microsoft tutorials

[Start learning today >](#)

Add or remove favorites by pressing Ctrl+Shift+F

Work with an expert

Microsoft Azure

Upgrade

6

odulajaayobami@hotmail...
DEFAULT DIRECTORY (ODULAJAA...

>>

Home > Network foundation | Virtual networks

Create virtual network

...

×

BasicsSecurityAddress spaceTagsReview + create

Virtual network address space

Define the address space of your virtual network with one or more IPv4 or IPv6 address ranges. Create subnets to segment the virtual network address space into smaller ranges for use by your applications. When you deploy resources into a subnet, Azure assigns the resource an IP address from the subnet. [Learn more](#)

☐ Allocate using IP address pools. [Learn more](#)

+ Add a subnet

10.30.0.0/16

Delete address space

Starting addressSize

10.30.0.0/16

10.30.0.0 - 10.30.255.25565,536 addresses

Subnets	IP address range	Size	NAT gateway
SensorSubnet1	10.30.20.0 - 10.30.20.2	/24 (256 addresses)	-
SensorSubnet2	10.30.21.0 - 10.30.21.2	/24 (256 addresses)	-

Previous

Next

Review + create

Give feedback

Home > Network foundation

Network foundation | Virtual networks

Preview

×

Search

◊

◀

+ Create

⚙ Manage view

↺ Refresh

⬇ Export to CSV

🔗 Open query

|

🏷 Assign tags

+ Add to service group

📑 Group by none

Virtual network

Virtual Network overview

Virtual networks

NAT gateways

Public IP addresses

Network interfaces

Network security groups

Application security groups

Bastions

Route tables

Route servers

Private Link

DNS

Related services

Monitoring and management

Filter for any field...

Subscription equals all

Resource Group equals all

Location equals all

+ Add filter

☐	Name ↑	Resource Group	Location	Subscription
☐	↔ CoreServiceVnet	⋮ RG-AZ104-LAB	Canada Central	Azure subscription 1
☐	↔ ManufacturingVNet	⋮ RG-AZ104-LAB	Canada Central	Azure subscription 1

VNET PEERING

Microsoft Azure

Upgrade

odulajaayobami@hotmail...
DEFAULT DIRECTORY (ODULAJAA...

Home > Network foundation | Virtual networks > CoreServiceVnet

CoreServiceVnet | Peerings

Virtual network

Search

Resource visualizer

Settings

- Address space
- Connected devices
- Subnets
- Bastion
- DDoS protection
- Firewall
- Microsoft Defender for Cloud
- Network manager
- DNS
- Peerings**
- Service endpoints
- Private endpoints
- Properties
- Locks

Monitoring

Automation

Help

+ Add Refresh Export to CSV Delete Sync

Virtual network peering enables you to seamlessly connect two or more virtual networks in Azure. The virtual networks appear as one for connectivity purposes.
[Learn more](#)

Filter by name...

Showing all 1 items

☐	Name ↑↓	Peering s... ↑↓	Peeri... ↑↓	Remo... ↑↓	Virtu... ↑↓
☐	Core-to-...	Fully Synchroni zed	✓ Conne cted	Manufac...	Disabled

Give feedback

Add or remove favorites by pressing Ctrl+Shift+F

Creating a DNS Zone and DNS Records Using Azure DNS

Home

Create a DNS Zone ...



Basics

DNS Zone Editor

Tags

Review + Create

A DNS zone is used to host the DNS records for a particular domain. For example, the domain 'contoso.com' may contain a number of DNS records such as 'mail.contoso.com' (for a mail server) and 'www.contoso.com' (for a web site). Azure DNS allows you to host your DNS zone and manage your DNS records, and provides name servers that will respond to DNS queries from end users with the DNS records that you create. [Learn more](#)

Project details

Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

Subscription * ⓘ

Azure subscription 1 ▾

Resource group * ⓘ

RG-AZ104-LAB ▾

[Create new](#)

Instance details

☐ This zone is a child of an existing zone already hosted in Azure DNS ⓘ

Name *

wideworldimports1234.com

Resource group location * ⓘ

(Canada) Canada Central ▾

Review + create

< Previous

Next : DNS Zone Editor >

[Give feedback](#)

Microsoft Azure | Upgrade | Search resources, services, and docs (G+/)

Home > Network foundation | Public DNS zones

Network foundation | Public DNS zones

Overview

Virtual network

Private Link

DNS

DNS overview

DNS private resolvers

Public DNS zones

Private DNS zones

Traffic managers

DNS security policies

Related services

Monitoring and management

Showing 1 - 1 of 1. Display count: auto

wideworldimports1234.com

DNS zone

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Resource visualizer

Settings

DNS Management

Recordsets

DNSSEC

Traffic management

Monitoring

Automation

Help

Child zone

Record sets

DNSSEC

Import

Export

Move

JSON View

Essentials

Resource group (move): RG-AZ104-LAB

Location: Global

Subscription (move): Azure subscription 1

Subscription ID: 63fe2ddb-a8c9-452c-a9b9-28146d666264

Recordsets: 2

Max number of record: 10000

Name server 1: ns1-06.azure-dns.com

Name server 2: ns2-06.azure-dns.net

Name server 3: ns3-06.azure-dns.org

Name server 4: ns4-06.azure-dns.info

Tags (edit): Add tags

Get Started

Tutorials

Tools + SDK

Azure DNS is a hosting service for DNS domains that provides name resolution by using Microsoft Azure infrastructure. By hosting your domains in Azure, you can manage your DNS records by using the same credentials, APIs, tools, and billing as your other Azure services.

Add DNS record sets

Begin hosting your domain in Azure

Creating A Record

Microsoft Azure | Upgrade | Search resources, services, and docs (G+/)

Home > Network foundation | Public DNS zones > wideworldimports1234.com

Network foundation | Public DNS zones

Overview

Virtual network

Private Link

DNS

DNS overview

DNS private resolvers

Public DNS zones

Private DNS zones

Traffic managers

DNS security policies

Related services

Monitoring and management

Showing 1 - 1 of 1. Display count: auto

wideworldimports1234.com | Recordsets

DNS zone

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Resource visualizer

Settings

DNS Management

Recordsets

DNSSEC

Traffic management

Monitoring

Automation

Help

Add

Refresh

Delete

Give feedback

A record set is a collection of records in a zone that have the same name and are the same type. You can search for record sets that have been loaded on this page. If you don't see what you're looking for, you can try scrolling to allow more record sets to load. [Learn more](#)


Search

Fetch 3 record set(s).

Name	Traffic Management	Type	TTL
@		NS	172800
@		SOA	3600
www		A	3600

Add or remove favorites by pressing Ctrl+Shift+F

Verifying DNS using nslookup

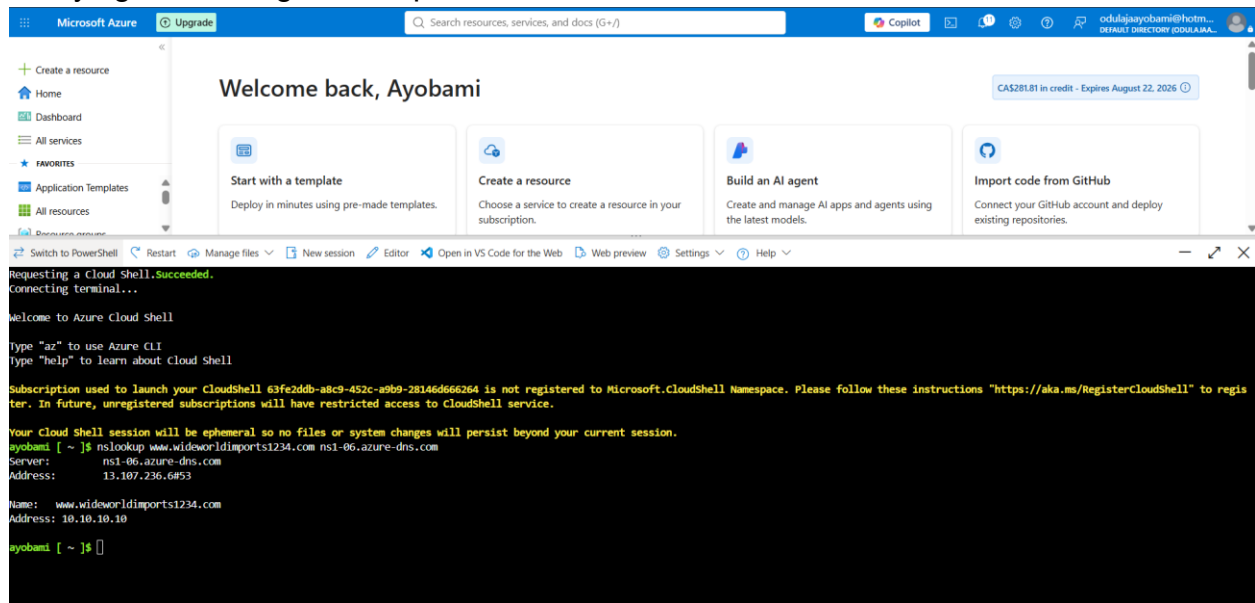

CREATING A CUSTOM ROUTE

First I created a new Resource group

The screenshot shows the Microsoft Azure portal interface. The top navigation bar includes the Microsoft Azure logo, an Upgrade button, search, and user information for 'odulajaayobami@hotmail...'. The left sidebar contains a navigation menu with options like Home, Resource Manager, All resources, Favorite resources, Recent resources, and Resource groups (which is currently selected). The main content area is titled 'Resource Manager | Resource groups' and shows a list of resource groups. The list has columns for Name, Subscription, and Location. Two resource groups are listed: 'NetworkWatcherRG' and 'RG-Routing-Lab', both under 'Azure subscript...' and in 'Canada Central' location. At the bottom, a pagination bar shows 'Showing 1 - 2 of 2. Display count: auto' and a 'Give feedback' link.

Home > Resource Manager

Resource Manager | Resource groups

Default Directory

Search

+ Create Manage view Refresh ... Group by none

Filter for any field...

Subscription equals all Location equals all + Add filter

☐	Name ↑		Subscription	Location
☐	NetworkWatcherRG	...	Azure subscript...	Canada Central
☐	RG-Routing-Lab	...	Azure subscript...	Canada Central

Showing 1 - 2 of 2. Display count: auto Give feedback

Add or remove favorites by pressing Ctrl+Shift+F

I deployed a new route table

Microsoft Azure Upgrade

Home

RouteTableDeployment-1785810710396 | Overview

Deployment

Search

Overview

- Inputs
- Outputs
- Template

✓ Your deployment is complete

Deployment name : RouteTableDeployment-1785810710396
Subscription : [Azure subscription 1](#)
Resource group : [RG-Routing-Lab](#)
Start time : 8/3/2026, 10:32:52 PM
Correlation ID : b9cc7316-ea32-4580-87a4-c6246cf5d059

> Deployment details

✓ Next steps

[Go to resource](#)

Cost management
Get notified to stay within your budget and prevent unexpected charges on your bill.
[Set up cost alerts >](#)

Microsoft Defender for Cloud
Secure your apps and infrastructure

Add or remove favorites by pressing Ctrl+Shift+F

Microsoft Azure

Upgrade

Search resources, services, and docs (5+)

Copilot

odulajaayobami@hotmail...
DEFAULT DIRECTORY EDUUAJAM...

Create a resource

Home

Dashboard

All services

FAVORITES

Application Templates

All resources

Resource groups

App Services

Function App

Azure SQL Database

Azure Cosmos DB

Virtual machines

Load balancers

Storage accounts

Virtual networks

Microsoft Entra ID

Monitor

Advisor

Microsoft Defender for Cloud

Home > Network foundation

Network foundation | Route tables

Preview

Diagnose connectivity issues using route tables

Analyze routing issues across route tables

Check route conflicts in all route tables

Search

Create

Manage view

Refresh

Export to CSV

Open query

Assign tags

Add to service group

Group by none

Overview

Virtual network

Virtual Network overview

Virtual networks

NAT gateways

Public IP addresses

Network interfaces

Network security groups

Application security groups

Bastions

Route tables

Route servers

Private Link

DNS

Related services

Monitoring and management

Filter for any field...

Subscription equals all

Resource Group equals all

Location equals all

Add filter

	Name	Resource Group	Location	Subscription
	Publictable	RG-Routing-Lab	Canada Central	Azure subscription 1

Applying Custom Route to the Routing Table

»

Home > Network foundation

Publictable |

Route table

Search

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problem

Resource visualizer

Settings

Configuration

Routes

Subnets

Properties

Locks

Monitoring

Automation

Help

Add route

Publictable

A user defined route (UDR) is a static route that overrides Azure's default system routes, or adds a route to a subnet's route table. [Learn more](#)

Route name *

productionsubnet

Destination type * ⓘ

IP Addresses

Destination IP addresses/CIDR ranges * ⓘ

10.0.1.0/24

Next hop type * ⓘ

Virtual appliance

Next hop address * ⓘ

10.0.2.4

ⓘ

Ensure you have IP forwarding enabled on your virtual appliance. You can enable this by navigating to the respective network interface's IP address settings.

Add

[Give feedback](#)

Home > Network foundation | Virtual networks

Create virtual network

BasicsSecurityAddress spaceTagsReview + create

☐ Allocate using IP address pools. [Learn more](#)

+ Add a subnet

10.0.0.0/16Delete address space

Starting addressSize

10.0.0.0/16

10.0.0.0 - 10.0.255.25565,536 addresses

Subnets	IP address range	Size	NAT gateway
PublicSubnet	10.0.0.0 - 10.0.0.255	/24 (256 addresses)	-
PrivateSubnet	10.0.1.0 - 10.0.1.255	/24 (256 addresses)	-
DMZSubnet	10.0.2.0 - 10.0.2.255	/24 (256 addresses)	-

Add IPv4 address space

PreviousNextReview + create

Give feedback



RG-Routing-Lab | Resource visualizer



Resource group



Choose resources



Reset diagram



Zoom to fit



Refresh



Export



Overview

Activity log

Access control (IAM)

Tags

Resource visualizer

Events

> Settings

> Cost Management

> Monitoring

> Automation

> Help



Publictable
Route table



vnet
Virtual network



I attached the Route table to the public subnet as seen below

Home > vnet

vnet | Subnets

Virtual network

Search

+ Subnet Refresh | Manage users Delete Export to CSV

Resource visualizer

Settings

Address space

Connected devices

Subnets

Bastion

DDoS protection

Firewall

Microsoft Defender for Cloud

Network manager

DNS

Peerings

Service endpoints

Private endpoints

Properties

Locks

Monitoring

Automation

Help

Create subnets to segment the virtual network address space into smaller ranges for use by your applications. When you deploy resources into a subnet, Azure assigns the resource an IP address from the subnet.

Search subnets

☐	Name	IPv4	IPv6	Available IPs	Delegated to	Security group	Route table
☐	DMZSubnet	10.0.2.0/24	-	251	-	-	-
☐	PrivateSubnet	10.0.1.0/24	-	251	-	-	-
☐	PublicSubnet	10.0.0.0/24	-	251	-	-	Publictable

Showing 3 subnets

Give feedback

Add or remove favorites by pressing Ctrl+Shift+F