

**Name: Ayush Patel Class B batch 35 Enrollment: 22162171038**

# **Institute of Computer Technology**

## **B. Tech Computer Science and Engineering**

### **Sub: Database Management System (2CSE301)**

Practical 6: Perform queries using joins, sub query, set operations, group by and having.

Scenario : Manytimes you will find data are interdependent on each other. Thus Mohan realized to see its dependency by applying different queries & sub- queries resulting into output that expected.

#### **SUB QUERIES**

A subquery is a form of an SQL statement that appears inside another SQL statement. It is also termed as nested query. The statement containing a subquery is called a parent statement. The parent statement uses the rows returned by the subquery. It can be used for the following:

- To insert records in target table
- To create tables and insert records in the table created.
- To update records in a target table.
- To create views
- To provide values for conditions in WHERE, HAVING, IN and so on used with SELECT, UPDATE, and DELETE statements.

It plays an important role in SQL mainly due to following reasons.

- SQL sub query is often the most natural way to express a query, because it most closely parallels the English-language description of the query.
- Sub queries lets you break a query down into pieces and then put the pieces together, hence very simple to implement.
- Some queries just can not be written without sub queries. ➤ Subquery must be enclosed in the parenthesis.

Subqueries can be divided into two broad groups-

- Single row suquery: This is subquery which returns only one value to the outer query.
- Multi row suquery: This is subquery which returns multiple values to the outer query.

#### **IN or NOT IN**

List the name, job and salary of people in department 20 who have the same job as people in department 30.

Sql>**SELECT enmae, job, sal FROM EMP WHERE deptno=20 and Job IN (SELECT job FROM EMP where deptno=30);**

### **ANY or ALL**

If a suquery returns more than one row and the comparison other than equality is required (e.g. <, >, <=...etc) then the ANY, ALL operators are used.

If the relation required for the list of values returned by the inner query, then the ANY operator is used.

#### **Example:**

Find out the name, job and salary of people in department 20 who earn more than any one in department 30.

```
Sql>SELECT ename, job, sal FROM emp WHERE deptno=20 AND sal  
      >ANY (SELECT sal FROM emp WHERE deptno=30);
```

If the relation required for the outer column in the WHERE clause is such that it should be TRUE for all the values in the list of values returned by the inner query; then the ALL operator is used.

#### **Example:**

Find out the name, job, salary of people who earn salary greater than all the people in department 30.

```
Sql>SELECT ename, job, sal FROM emp WHERE deptno=20 AND sal  
      >ALL (SELECT sal FROM emp WHERE deptno=30);
```

### **Correlated Subqueries**

A sub-query becomes correlated when the subquery references a column from a table in the parent query. A correlated subquery is evaluated once for each row processed by the parent statement, which can be any of SELECT, DELETE or UPDATE.

A correlated subquery is one way of reading every row in a table and comparing values in each row against related data. It is used whenever a subquery must return a different result for each candidate row considered by the parent query.

Consider the query to find out the employees who earn more than the average salary in their own department.

```
Sql>SELECT deptno, ename, sal FROM emp WHERE  
      Sal> (SELECT avg (sal) FROM emp WHERE deptno=deptno);
```

- A correlated suquery refers to a column selected by the main query.
- If a query performs a select from the same table as the main query the main query must define an alias for the table name and the subquery must use the alias to refer to the table

## **Name: Ayush Patel Class B batch 35 Enrollment: 22162171038**

name and the suquery must use the alias to refer the column value in the main query's candidate rows.

- HAVING clause can also be used in correlated suquery.

### **EXISTS:-**

The **EXISTS** operator is usually used with correlated suqueries. This operator enables to test whether a value retrieved by the outer query exists in the results set of the values retrieved by the inner query. If the suquery returns at least one row, the operator returns **TRUE**. If the value does not exist, it returns **FALSE**.

The EXISTS operator ensures that the search in inner query terminates when at least one match is found. Similarly, the NOT EXISTS operator enables to test whether a value retrieved by the outer query is not a part of the result set of the values retrieved by the inner query.

#### **Example:**

Find all the departments that have employees yet.

```
Sql>SELECT deptno, dname, loc FROM dept WHERE  
      EXISTS (SELECT deptno FROM emp WHERE deptno= emp.deptno);
```

### **Sub queries returning multiple columns:-**

Inner queries can return more than one columns. Only one care should be taken to write the query in such a way that the order and the type of the column selected by the inner query.

#### **Example:**

Find out who are the highest paid employees in each department.

```
Sql>SELECT deptno, ename, sal from emp WHERE (deptno, sal) IN  
      (SELECT deptno, max (sal) FROM emp GROUP BY deptno);
```

## **JOINING TABLES**

Sometimes it is necessary to work with multiple tables as though they were a single entity. Then a single SQL sentence can manipulate data from all the tables. Tables are joined on columns that have the same data type and data width in the tables.

### **JOINS**

- The process of forming rows from two or more tables by comparing the contents of related column is called joining tables.
- The resulting table (containing data from both the original table) is called a join between the tables.

## **Name: Ayush Patel Class B batch 35 Enrollment: 22162171038**

- Joins are foundation of multi-table query processing in SQL.
- Since SQL handles multi-table queries by matching columns, it uses the SELECT command for a search condition that specifies a column match.

**Sql>SELECT columns FROM table1, table2,... WHERE  
logical express**

- The where clause specifies how to join or merge the tables together as well as the search criteria if any.
- Columns from tables may be named in SELECT clause.
- Columns which have the same name in multiple table named in the from clause must be uniquely identified by specifying tablename.column name.
- Tablename.\* is short cut to specify all the columns in the table. More than one pair of columns may be used to specify the join condition between two tables.

### **Using aliases**

When using a join, it is good idea to identify all columns by using their table names. However, typing long table names can be difficult sometimes. So, to overcome this problem one can define short name aliases for tables.

**Sql> SELECT t1.col1, t1.col2, t2.col3 FROM table t1, table t2 WHERE t1.col1=  
t2.col 1;**

Here t1 and t2 are used as aliases for table 1 and table 2 respectively.

### **Types of JOIN**

#### **1. INNER JOIN OR EQUI JOIN**

- A join that is formed as a result of an exact match between two columns is called an equi-join or a inner join. Statement generally compares two columns from two tables with the equivalences operator =.
- Consider query in which we want to know the name of the employee, his department and its location.

**Sql > SELECT ename, deptno, locaion FROM Emp, Dept  
WHERE Emp.deptno = Dept.deptno; (Theta Style)**

**Name: Ayush Patel Class B batch 35 Enrollment: 22162171038**

**Sql> SELECT ename, deptno, locaion FROM Emp E inner join Dept D  
on E.deptno = D.deptno;**

## **2. OUTER JOIN**

Outer joins give more flexibility when selecting data from related tables. This type of join can be used in situations where it is desired, to select all rows from the table on the left( or right, or both) regardless of whether the other table has values in common and (usually) enter NULL where data is missing.

### **A) Left Outer Join**

It returns all the rows from the first table, even if there are no matches in the second table. For example if there are no employees in Emp\_m table that do not have any contacts in Cntc\_d tale, those rows will also be listed.

**Sql> SELECT E.name, E.dept, C.eno, C.cdata FROM Emp\_m E LEFT JOIN Cntc\_d C on  
E.eno = C.eno;**

**Sql> SELECT E.name, E.dept, C.eno, C.cdata FROM Emp\_m E , Cntc\_d C WHERE  
E.eno = C.eno(+);**

### **B) Right Outer Join**

It returns all the rows from the second table even if there are no matches in the first table.

**Sql> SELECT E.name, E.dept, C.eno, C.cdata FROM Emp\_m E RIGHT JOIN Cntc\_d C on  
E.eno = C.eno;**

**Sql> SELECT E.name, E.dept, C.eno, C.cdata FROM Emp\_m E , Cntc\_d C WHERE  
E.eno(+) = C.eno;**

### **C) Full Outer Join**

It returns all the rows from the both tables even if there are no matches.

**Sql> SELECT E.name, E.dept, C.eno, C.cdata FROM Emp\_m E FULL JOIN Cntc\_d C on E.eno  
= C.eno;**

## **3. CROSS JOIN OR CARTESIAN JOIN:**

This join combines every row from the left table with every row in the right table. This types of join can be used in situations where it is desired, to select all possible cominations of rows and columns from both tables. This kind of join is usually not preferred as it may run for a very long time and produce a huge result set that may not be useful.

**Sql>SELECT ename, loc  
FROM EMP Cross Join DEPT WHERE**

#### **4. NON EQUI JOIN:-**

- The join which uses comparison operation other than '=' while defining their joining criteria are called non-equi joins.
- Since this join can result in large number of rows, it is advisable to make a non-equi join in combination with a selection criteria to reduce the rows to a manageable range.

#### **5. SELF-JOIN:-**

- A self join is used to match and retrieve rows that have matching value in different columns of the same table.
- To join a table to itself, two copies of the very same table have to be opened in memory. Hence in the from clause, the table name needs to be mentioned twice. Since the table names are the same, each table is opened using an alias.
- These aliases table will cause two identical tables to be opened in different memory locations. These will result in two identical tables to be physically present in the memory.

Example:- Consider relation Emp\_m (E\_no, Fname, Lname, m\_no)

Retrieve the names of the employees and the names of their respective managers from the table

```
Sql > SELECT Emp.Fname, Mngr.Fname FROM  
      Emp_m Emp, Emp_m Mngr WHERE  
      Emp.m_no=Mngr.E_no.
```

- A table can be joined to itself as if it were two tables.
- As with any other join, the join is on columns that contain the same type of information.
- The table must be given an alias to synchronize which columns are coming from which tables.

#### **GROUP BY Clause**

This clause tells Oracle to group rows based on distinct values that exist for specified columns. i.e. It groups the selected rows based on the value of expression for each row and returns a single row of summary information for each group.

## **Name: Ayush Patel Class B batch 35 Enrollment: 22162171038**

**sql >SELECT** grouped -by-columns functions **FROM** table

name **GROUP BY** column, column.,... ; Example:

Retrieve the product numbers and the total quantity ordered for each product from the s\_order\_details.

```
sql >SELECT p_no, sum (qty_ordered) “ total qty Ordered”  
          FROM s_order_details  
          GROUP BY p_no;
```

### **GROUPING FUNCTION**

These functions act on a group or set of rows and return one Row of summary information per set.

|                  |                                                                                         |
|------------------|-----------------------------------------------------------------------------------------|
| <b>SUM</b>       | Computes the total value of the group                                                   |
| <b>AVG</b>       | Computes the average value of the group                                                 |
| <b>MIN</b>       | Computes the minimum value of the group                                                 |
| <b>MAX</b>       | Computes the maximum value of the group                                                 |
| <b>STDDEV</b>    | Computes the standard deviation of the group                                            |
| <b>VARIANCE</b>  | Computes the variance of the group                                                      |
| <b>COUNT</b>     | Counts the number of non-NULL values for the Specified group.                           |
| <b>COUNT (*)</b> | Counts the number of rows including those having NULL values for the given condition. . |

### **HAVING CLAUSE**

The HAVING clause can be used in conjunction with the GROUP BY clause. HAVING imposes a condition on the group by clause, which further filters the groups created by the group by clause.

HAVING and WHERE clauses work in a similar manner. The difference is that WHERE works on rows, while HAVING works on groups. Expression in HAVING clause must be single value per group.

### **USING THE UNION, INTERSECT AND MINUS CLAUSE**

#### ***Union Clause:***

Multiple queries can be put together and their output combined using the union clause. The union clause merges the output of two or more queries into a single set of rows and columns.

#### **Example:**

Retrive the names of all the clients and salesman in the city of ‘mumbai ‘ from the tables client\_master and salesman\_master.

**Name: Ayush Patel Class B batch 35 Enrollment: 22162171038**

```
SELECT salesman_no, name FROM
    salesman_master
    WHERE city='mumbai' UNION
SELECT client_no, name FROM client_master
    WHERE city='mumbai';
```

***Intersect Clause:***

Multiple queries can be put together and their output combined using the intersect clause. The intersect clause outputs only rows produced by both the queries intersected i.e. the output in an intersect clause will include only those rows that are retrieved by both the queries.

Example: Retrieves the salesman name in 'mumbai' whose efforts have resulted into at least one sales transaction.

```
SELECT salesman_no, name FROM salesman_master
    WHERE city='mumbai'; INTERSECT
SELECT salesman_master.salesman_no, name
    FROM salesman_master, sales_order
    WHERE salesman_master.salesman_no = sales_order.salesman_no;
```

The intersect clause picks up records that are common in both queries. ***Minus Clause:***

Multiple queries can be put together and their output combined using the minus clause. The minus clause outputs the rows produced by the first query, after filtering the rows retrieved by the second query.

Example:

Retrives all the product numbers of non-moving items from the product\_master table.

**Table name:** sales\_order\_deatils

| Order No | Product No |
|----------|------------|
| O111     | P112       |
| O112     | P111       |
| O113     | P113       |
| O114     | P114       |

**Table name:** product\_master

| Product No | Description |
|------------|-------------|
| P112       | Monitors    |



**Name: Ayush Patel Class B batch 35 Enrollment: 22162171038**

|      |           |
|------|-----------|
| P113 | CD Drives |
| P116 | Keyboards |
| P117 | HDD       |

**SELECT** product no **FROM** product\_master  
**MINUS**  
**SELECT** product no **FROM** sales\_order\_details;

The minus clause picks up records in the first query after filtering the records retrieved by the second query. Thus, the output after applying the MINUS clause will be:

**Output:**

Product No

---

P113  
P114

### **CONSTRUCTING AN ENGLISH SENTENCE WITH DATA FROM TABLE COLUMNS**

Example:

Create an English sentence, by joining predetermined string values with column data retrieved from the sales\_order table.

**The string literals are :** Order No.  
Was placed by Client No. On

**The columns are:** Order\_no  
Client\_no  
Order\_date

**Table Name:** Sales\_order

| Order_no | Client_no | Order_date |
|----------|-----------|------------|
| O1001    | C001      | 04-aug-06  |
| O1002    | C002      | 05-aug-06  |
| O1003    | C003      | 06-aug-06  |

**SELECT** 'order no.'|| order\_no || 'was placed by Client No'|| Client\_no|| 'on' || order\_date **FROM** sales\_order;

**Output:**

'orderno.'||Order\_no||'wasplacedbyclientno.'||Client\_no||'on' ||Order\_date

Order no. O1001 was placed by Client no. C001 on 04-aug-06 Order  
no. O1002 was placed by Client no. C002 on 05-aug-06 Order no.  
O1003 was placed by Client no. C003 on 06-aug-06

**To avoid a data header that appears meaningless, use an alias as shown below:**

```
SELECT 'order no.'|| order_no || 'was placed by Client No' || Client_no || 'on' || order_date  
      "Orders placed" FROM sales_order;
```


**Output:**

Orders placed

---

Order no. O1001 was placed by Client no. C001 on 04-aug-06 **Solve**  
**the following queries using sub queries:-**

- 1) Find the product\_no and description of non moving products i.e. product not being sold.

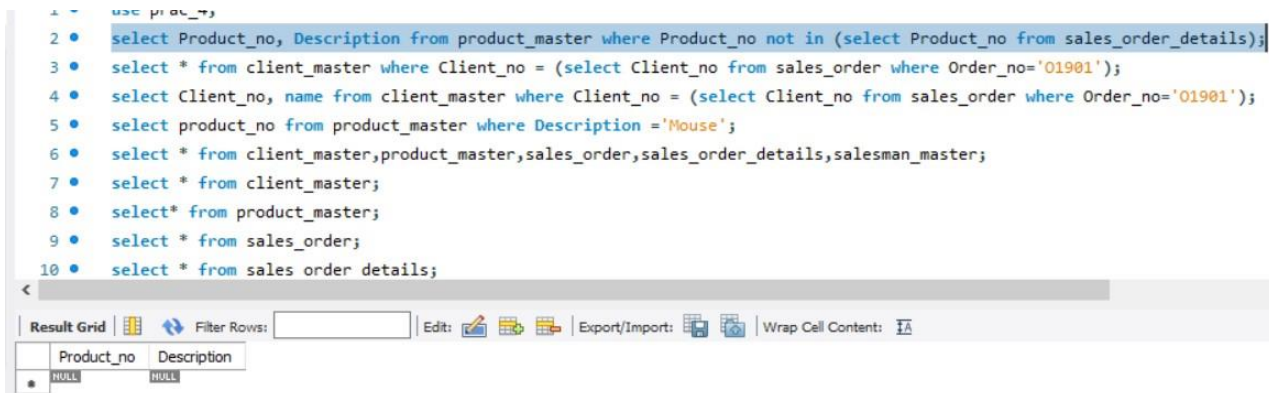

```
1 • use product;  
2 • select Product_no, Description from product_master where Product_no not in (select Product_no from sales_order_details);  
3 • select * from client_master where Client_no = (select Client_no from sales_order where Order_no='O1901');  
4 • select Client_no, name from client_master where Client_no = (select Client_no from sales_order where Order_no='O1901');  
5 • select product_no from product_master where Description = 'Mouse';  
6 • select * from client_master,product_master,sales_order,sales_order_details,salesman_master;  
7 • select * from client_master;  
8 • select* from product_master;  
9 • select * from sales_order;  
10 • select * from sales order details;
```

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content: |

| Product_no | Description |
|------------|-------------|
| NULL       | NULL        |

- 2) Find the customer name, address1, address2, city and pincode for the client who has placed order no 'O1901'.

## Name: Ayush Patel Class B batch 35 Enrollment: 22162171038

```
3 • select * from client_master where Client_no = (select Client_no from sales_order where Order_no='01901');
4 • select Client_no, name from client_master where Client_no = (select Client_no from sales_order where Order_no='01901');
5 • select product_no from product_master where Description = 'Mouse';
6 • select * from client_master,product_master,sales_order,sales_order_details,salesman_master;
7 • select * from client_master;
8 • select* from product_master;
9 • select * from sales_order;
10 • select * from sales order details;
```

Result Grid

|   | client_no | name | city   | pincode | state       | bal_due  |
|---|-----------|------|--------|---------|-------------|----------|
| ▶ | C001      | Ivan | Bombay | 400054  | Maharashtra | 15000.00 |
| * | NULL      | NULL | NULL   | NULL    | NULL        | NULL     |

```
4 • select Client_no, name from client_master where Client_no = (select Client_no from sales_order where Order_no='01901');
5 • select product_no from product_master where Description = 'Mouse';
6 • select * from client_master,product_master,sales_order,sales_order_details,salesman_master;
7 • select * from client_master;
8 • select* from product_master;
9 • select * from sales_order;
10 • select * from sales order details;
```

Result Grid

|   | Client_no | name |
|---|-----------|------|
| ▶ | C001      | Ivan |

- 3) Find out if the product 'Mouse' has been ordered by any client and print the client\_no, name to whom it was sold.

```
5 • select product_no from product_master where Description = 'Mouse';
6 • select * from client_master,product_master,sales_order,sales_order_details,salesman_master;
7 • select * from client_master;
8 • select* from product_master;
9 • select * from sales_order;
10 • select * from sales order details;
```

Result Grid

|   | product_no |
|---|------------|
| ▶ | P003       |

## Name: Ayush Patel Class B batch 35 Enrollment: 22162171038

```
5 • select product_no from product_master where Description ='Mouse';
6 • select * from client_master,product_master,sales_order,sales_order_details,salesman_master;
7 • select * from client_master;
8 • select* from product_master;
9 • select * from sales_order;
10 • select * from sales_order_details;
11 • select * from salesman_master;
12
13 • select * from client master natural join product master natural join sales order natural join sales order details;
```

| client_no | name    | city   | pincode | state       | bal_due | Product_no | Description | P_percent | U_measure | Qty_on_hand | Reorder_lvl | Sell_price | Cost_price | order_no | order_date | client_no | s_no | dely_type |
|-----------|---------|--------|---------|-------------|---------|------------|-------------|-----------|-----------|-------------|-------------|------------|------------|----------|------------|-----------|------|-----------|
| C006      | Rukmani | Bombay | 400050  | Maharashtra | 0.00    | P007       | 1.44 Drive  | 4.00      | Piece     | 10          | 3           | 8400.00    | 8000.00    | O1901    | 2006-01-12 | C001      | S001 | F         |
| C006      | Rukmani | Bombay | 400050  | Maharashtra | 0.00    | P007       | 1.44 Drive  | 4.00      | Piece     | 10          | 3           | 8400.00    | 8000.00    | O1901    | 2006-01-12 | C001      | S001 | F         |
| C006      | Rukmani | Bombay | 400050  | Maharashtra | 0.00    | P007       | 1.44 Drive  | 4.00      | Piece     | 10          | 3           | 8400.00    | 8000.00    | O1901    | 2006-01-12 | C001      | S001 | F         |
| C005      | Ravi    | Delhi  | 100001  | Gujarat     | 2000.00 | P007       | 1.44 Drive  | 4.00      | Piece     | 10          | 3           | 8400.00    | 8000.00    | O1901    | 2006-01-12 | C001      | S001 | F         |
| C005      | Ravi    | Delhi  | 100001  | Gujarat     | 2000.00 | P007       | 1.44 Drive  | 4.00      | Piece     | 10          | 3           | 8400.00    | 8000.00    | O1901    | 2006-01-12 | C001      | S001 | F         |
| C005      | Ravi    | Delhi  | 100001  | Gujarat     | 2000.00 | P007       | 1.44 Drive  | 4.00      | Piece     | 10          | 3           | 8400.00    | 8000.00    | O1901    | 2006-01-12 | C001      | S001 | F         |
| C004      | Basu    | Bombay | 400056  | Maharashtra | 0.00    | P007       | 1.44 Drive  | 4.00      | Piece     | 10          | 3           | 8400.00    | 8000.00    | O1901    | 2006-01-12 | C001      | S001 | F         |
| C004      | Basu    | Bombay | 400056  | Maharashtra | 0.00    | P007       | 1.44 Drive  | 4.00      | Piece     | 10          | 3           | 8400.00    | 8000.00    | O1901    | 2006-01-12 | C001      | S001 | F         |

```
14 • select Client_no,name from client_master where Client_no
15 • in(select client_no from sales_order where Order_no
16 • in (select order_no from sales_order_details where Product_no =
17 • (select product_no from product_master where Description='Mouse')));
18 • select Client_no,name from client_master where Client_no in(select Client_no from sales_order as r0 :
19 • select Client_no,name from client_master where Client_no in(select Client_no from sales_order as r0 :
20 • select * from sales_order natural join sales_order_details ;
21
```

| Client_no | name    |
|-----------|---------|
| C001      | Ivan    |
| C003      | Pramada |

### Queries using Having and Group By Clause:

1) Print the description and total qty sold for each product.

```
25 • select p.description,sum(Qty_disp) from product_master as p ,sales_order_details as sol where p.Product_no = sol.Product_no group by p.Product_no;
26 • select description,sum(Qty_disp*Product_rate) from product_master as p ,sales_order_details as sol where p.Product_no = sol.Product_no and Qty_disp>0 group
27 • select sod.order no,sum(Qty ordered) from sales order so, sales order details sod where
```

| description | sum(Qty_disp) |
|-------------|---------------|
| Floppies    | 4             |
| Monitor     | 4             |
| Mouse       | 5             |
| Floppies    | 2             |
| Keyboards   | 10            |
| Cd Drive    | 2             |
| 1.44 Drive  | 0             |

2) Find the value of each product sold.



## Name: Ayush Patel Class B batch 35 Enrollment: 22162171038

```
26 • select description,sum(Qty_disp*Product_rate) from product_master as p ,sales_order_details as sod where p.Product_no = sod.Product_no and Qty_disp>0 group by p.Product_no;
27 • select sod.order_no,sum(Qty_ordered) from sales_order so, sales_order_details sod where
28 so.order_no = sod.order_no and so.billed_yn = 'y' and month(so.order_date)=1 group by order_no;
```

| description | sum(Qty_disp*Product_rate) |
|-------------|----------------------------|
| Floppies    | 2100.00                    |
| Monitor     | 17850.00                   |
| Mouse       | 9450.00                    |
| Floppies    | 17250.00                   |
| Cd Drive    | 2100.00                    |
| Keyboards   | 5250.00                    |

3) Find out the sum total of all the billed orders for the month of January

```
28 • select sod.order_no,sum(Qty_ordered) from sales_order so, sales_order_details sod where so.order_no = sod.order_no and so.billed_yn = 'y' and month(so.order_date)=1 group by order_no;
```

| order_no | sum(Qty_ordered) |
|----------|------------------|
|----------|------------------|

## Queries on Joins and Correlation:

1) Find out the products, which have been sold to 'Ivan'.

```
32 • select Product_no from sales_order_details as sod inner join sales_order as so on sod.order_no=so.order_no inner join client_master as cl on sod.Client_no=cl.Client_no and cl.Client_name='Ivan';
33 • select distinct Description from product_master as p1 inner join sales_order_details as sod on p1.Product_no=sod.Product_no natural join client_master where Client_name='Ivan';
34 • select * from client_master natural join product_master natural join sales_order natural join sales_order_details;
```

| Product_no |
|------------|
| P001       |
| P002       |
| P003       |
| P004       |
| P006       |

2) Find the product\_no and description of constantly sold i.e. rapidly moving products.

```
33 • select distinct Description from product_master as p1 inner join sales_order_details as sod on p1.Product_no=sod.Product_no natural join client_master where Client_name='Ivan';
34 • select * from client_master natural join product_master natural join sales_order natural join sales_order_details;
35 • select Description from product_master as p1 inner join sales_order_details as sod on p1.Product_no=sod.Product_no inner join sales_order as so on sod.order_no=so.order_no inner join client_master as cl on sod.Client_no=cl.Client_no and cl.Client_name='Ivan';
```

| Description |
|-------------|
| Floppies    |
| Monitor     |
| Mouse       |
| Keyboards   |
| Cd Drive    |
| 1.44 Drive  |

3) Find the names of clients who have purchased 'Cd Drive'.

```
25 • select p.description,sum(Qty_disp) from product_master as p ,sales_order_details as sod where p.Product_no = sod.Product_no group by p.Product_no;
26 • select description,sum(Qty_disp*Product_rate) from product_master as p ,sales_order_details as sod where p.Product_no = sod.Product_no and Qty_disp>0 group by p.Product_no;
27 • select sod.order_no,sum(Qty_ordered) from sales_order so, sales_order_details sod where so.order_no = sod.order_no and so.billed_yn = 'y' and month(so.order_date)=1 group by order_no;
28 • select sod.order_no,sum(Qty_ordered) from sales_order so, sales_order_details sod where so.order_no = sod.order_no and so.billed_yn = 'y' and month(so.order_date)=1 group by order_no;
```

| Product_no | order_no | client_no | name    | city   | pincode | state       | bal_due  | Description | P_percent | U_measure | Qty_on_hand | Reorder_lvl | Sell_price | Cost_price | order_date | s_no | dely_type | billed_yn |
|------------|----------|-----------|---------|--------|---------|-------------|----------|-------------|-----------|-----------|-------------|-------------|------------|------------|------------|------|-----------|-----------|
| P001       | O1901    | C001      | Ivan    | Bombay | 400054  | Maharashtra | 15000.00 | Floppies    | 5.00      | Piece     | 100         | 20          | 525.00     | 500.00     | 2006-01-12 | S001 | F         | N         |
| P002       | O1901    | C001      | Ivan    | Bombay | 400054  | Maharashtra | 15000.00 | Monitor     | 6.00      | Piece     | 10          | 3           | 12000.00   | 11280.00   | 2006-01-12 | S001 | F         | N         |
| P003       | O1901    | C001      | Ivan    | Bombay | 400054  | Maharashtra | 15000.00 | Mouse       | 5.00      | Piece     | 20          | 5           | 1050.00    | 1000.00    | 2006-01-12 | S001 | F         | N         |
| P001       | O1902    | C002      | Vandana | Madras | 780001  | Tamil Nadu  | 0.00     | Floppies    | 5.00      | Piece     | 100         | 20          | 525.00     | 500.00     | 2006-01-25 | S002 | P         | N         |
| P004       | O1903    | C001      | Ivan    | Bombay | 400054  | Maharashtra | 15000.00 | Floppies    | 5.00      | Piece     | 100         | 20          | 525.00     | 500.00     | 2006-04-03 | S001 | F         | Y         |
| P006       | O1903    | C001      | Ivan    | Bombay | 400054  | Maharashtra | 15000.00 | Cd Drive    | 2.50      | Piece     | 10          | 3           | 5250.00    | 5100.00    | 2006-04-03 | S001 | F         | Y         |
| P005       | O1908    | C005      | Ravi    | Delhi  | 100001  | Gujarat     | 2000.00  | Keyboards   | 2.00      | Piece     | 10          | 3           | 3150.00    | 3050.00    | 2006-05-24 | S003 | F         | N         |
| P007       | O1908    | C005      | Ravi    | Delhi  | 100001  | Gujarat     | 2000.00  | 1.44 Drive  | 4.00      | Piece     | 10          | 3           | 8400.00    | 8000.00    | 2006-05-24 | S003 | F         | N         |
| P002       | O4665    | C003      | Pramada | Bombay | 400057  | Maharashtra | 5000.00  | Monitor     | 6.00      | Piece     | 10          | 3           | 12000.00   | 11280.00   | 2006-02-18 | S003 | F         | Y         |
| P003       | O4665    | C003      | Pramada | Bombay | 400057  | Maharashtra | 5000.00  | Mouse       | 5.00      | Piece     | 20          | 5           | 1050.00    | 1000.00    | 2006-02-18 | S003 | F         | Y         |
| P004       | O4665    | C003      | Pramada | Bombay | 400057  | Maharashtra | 5000.00  | Floppies    | 5.00      | Piece     | 100         | 20          | 525.00     | 500.00     | 2006-02-18 | S003 | F         | Y         |
| P005       | O4665    | C003      | Pramada | Bombay | 400057  | Maharashtra | 5000.00  | Keyboards   | 2.00      | Piece     | 10          | 3           | 3150.00    | 3050.00    | 2006-02-18 | S003 | F         | Y         |

## Name: Ayush Patel Class B batch 35 Enrollment: 22162171038

- 4) List the product number and order number from customers who have ordered less than 4 units of 'Mouse'.

```
37 • select order_no,sol.product_no from sales_order_details as sol inner join product_master as p1 on sol.Product_no = p1.Product_no and sol.Qty_ordered < 4 and p1.Product_no='p003'
38 • select concat( description , 'Worth Rs.' ,qty_ordered * product_rate,'was sold.') from product_master natural join sales_order_details ;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content: |

| order_no | product_no |
|----------|------------|
| O1901    | P003       |

Result Grid