

<u>LAB-9</u>


<u>Connect to a MongoDB server using MongoDB Compass.</u>

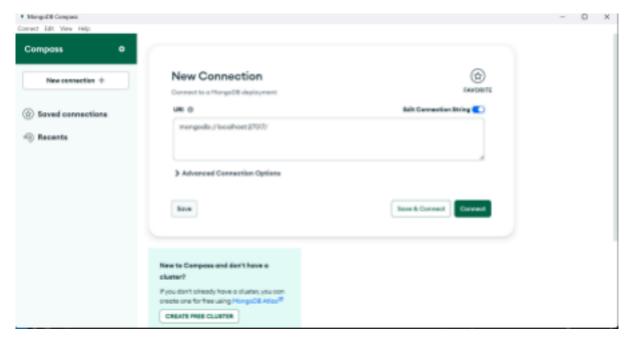


Create a new database named "testdb" in MongoDB Compass.

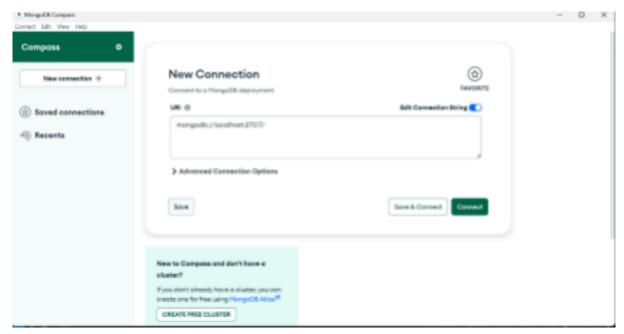


Create a new collection named "students" in the "testdb" database.

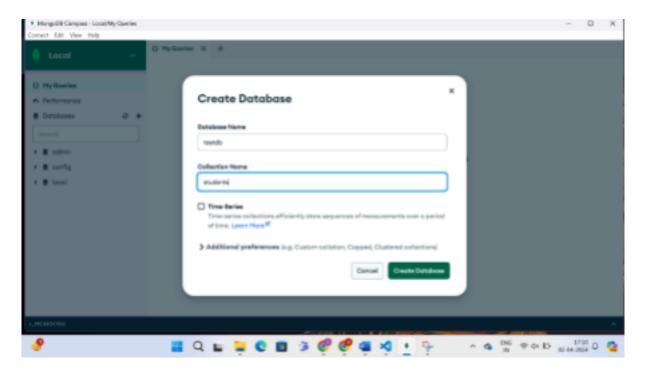


Insert ten documents into the "students" collection with the following fields: name, age, and email.

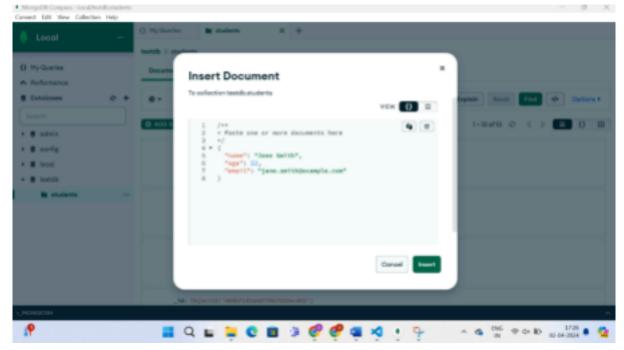


View the contents of the "students" collection.

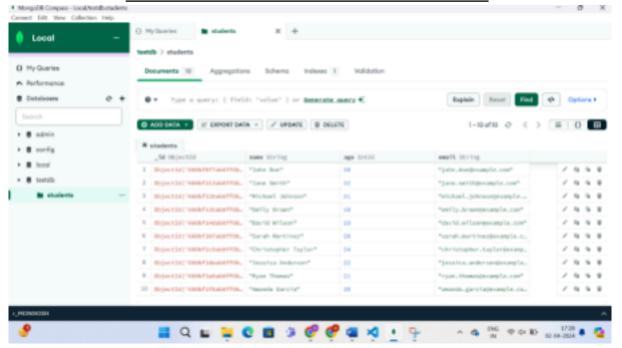


Update the age of a specific student in the "students" collection.

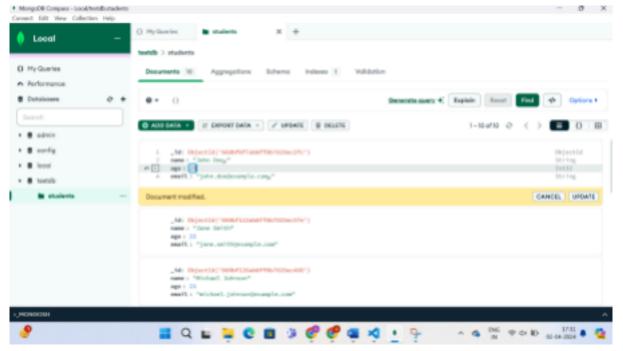


<u>Delete a document from the "students" collection based on a specific condition.</u>

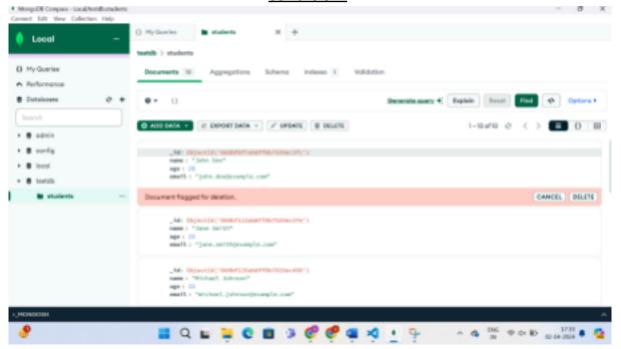


<u>Use the aggregation pipeline to calculate the average age of all students in</u> the "students" collection.

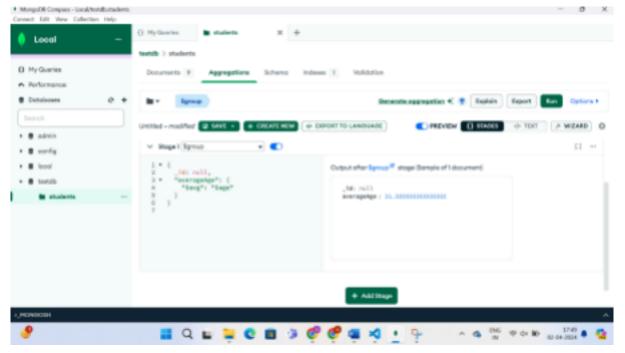


Create an index on the "name" field in the "students" collection.

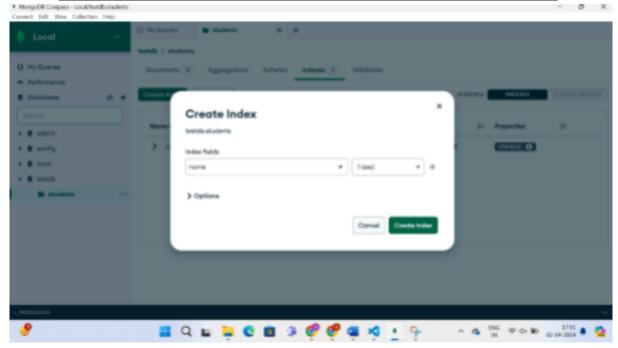

Export the contents of the "students" collection to a JSON file.

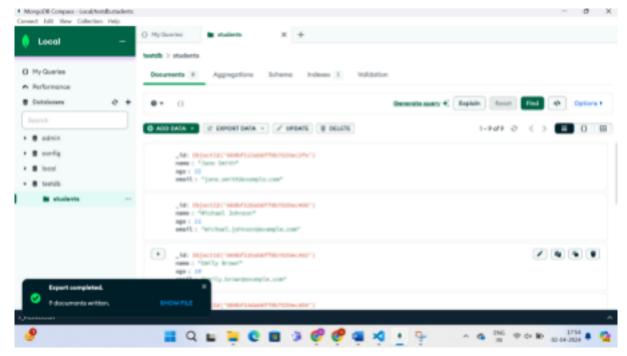

<u>Perform a complex aggregation operation to find the top 5 oldest students in the "students" collection.</u>

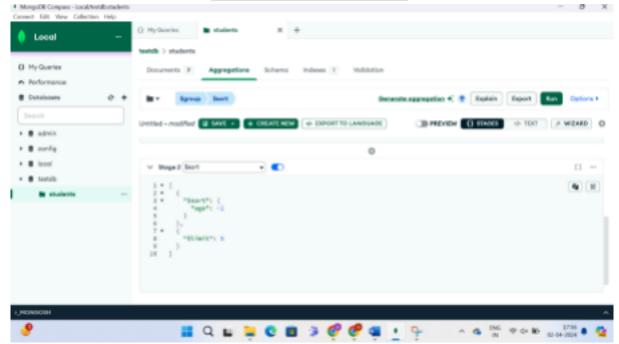

Create a geospatial index on a field representing the location of students.

