


Obiettivo: utilizzare una vulnerabilità smb su windows xp  
per poter sfruttare la vulnerabilità smb presente su windows per prima cosa attiviamo il network sulla macchina per simularne la presenza su una rete aziendale in cui lavora con altri computer. Una volta abilitato il network grazie al network wizard possiamo individuare con nmap(senza usare il ping) che le porte vengono aperte.  
Andiamo a prendere su metasploit la vulnerabilità MS08-067 e una volta compilato l'RHOSTS con l'ip della macchina bersaglio arriviamo l'exploit e, grazie a meterpreter andiamo a fare uno screen di ciò che vediamo sulla macchina bersaglio.

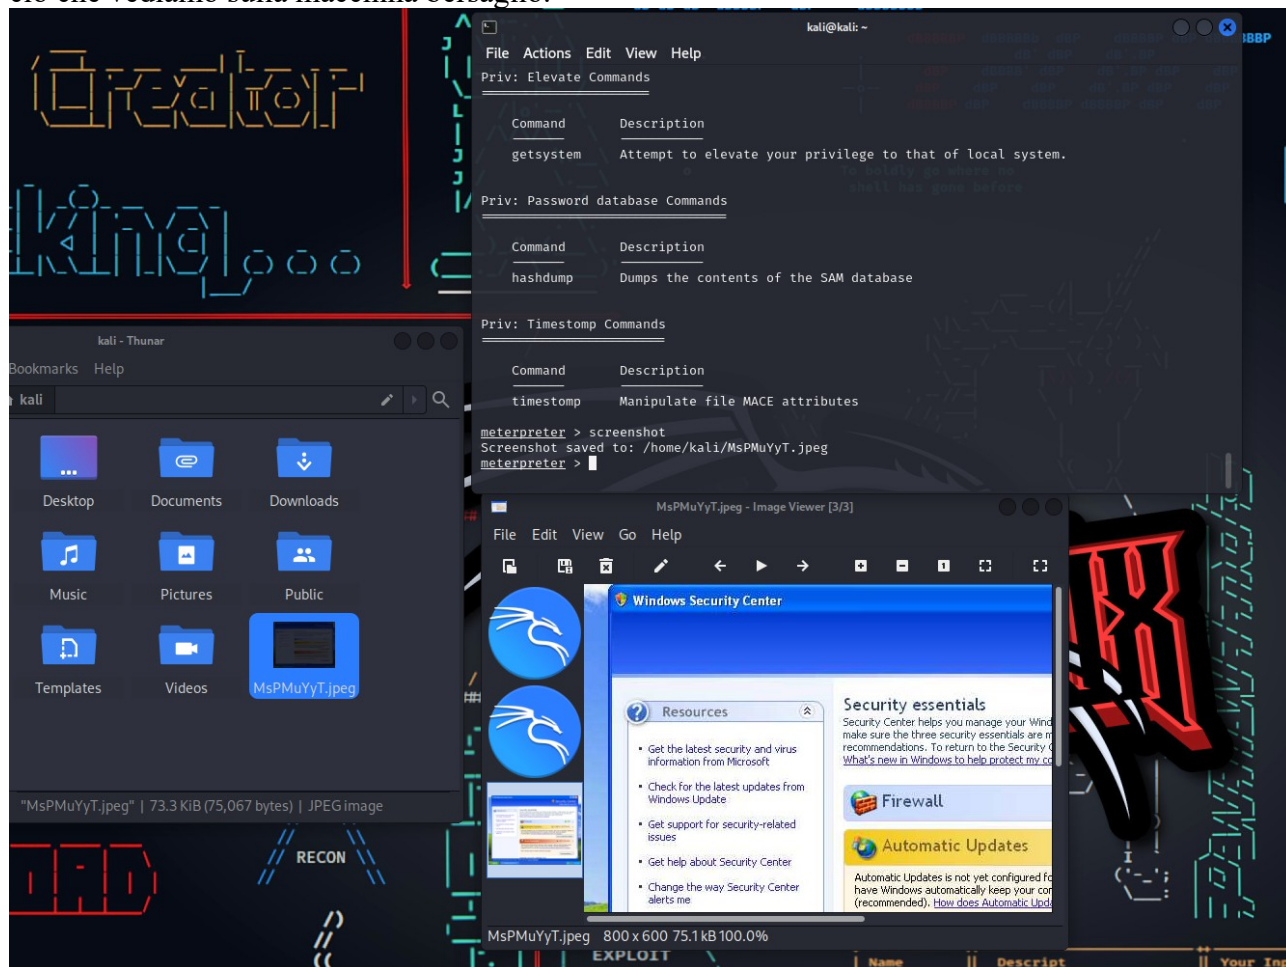

Successivamente andiamo a cercare una possibile webcam attiva.

```
kali@kali: ~  
File Actions Edit View Help  
Command      Description  
getsystem     Attempt to elevate your privilege to that of local system.  
  
Priv: Password database Commands  
Command      Description  
hashdump      Dumps the contents of the SAM database  
  
Priv: Timestamp Commands  
Command      Description  
timestamp     Manipulate file MACE attributes  
  
meterpreter > screenshot  
Screenshot saved to: /home/kali/MsPMuYyT.jpeg  
meterpreter > webcam_list  
[-] No webcams were found  
meterpreter > 
```

Come mostrato nello screenshot non è presente alcuna webcam.