

Real Python

Linear Regression in Python

by Mirko Stojiljković 20 Comments data-science intermediate machine-learning

Mark as Completed



[Tweet](#)

[Share](#)

[Email](#)

Table of Contents

- [Regression](#)
 - [What Is Regression?](#)
 - [When Do You Need Regression?](#)
- [Linear Regression](#)
 - [Problem Formulation](#)
 - [Regression Performance](#)
 - [Simple Linear Regression](#)
 - [Multiple Linear Regression](#)
 - [Polynomial Regression](#)
 - [Underfitting and Overfitting](#)
- [Implementing Linear Regression in Python](#)
 - [Python Packages for Linear Regression](#)
 - [Simple Linear Regression With scikit-learn](#)
 - [Multiple Linear Regression With scikit-learn](#)
 - [Polynomial Regression With scikit-learn](#)
 - [Advanced Linear Regression With statsmodels](#)
- [Beyond Linear Regression](#)
- [Conclusion](#)



[Online Python Training »](#)
Future Proof Your Career

[Remove ads](#)

We're living in the era of large amounts of [data](#), powerful computers, and [artificial intelligence](#). This is just the beginning. [Data science](#) and machine learning are driving image recognition, autonomous vehicles development, decisions in the financial and energy sectors, advances in medicine, the rise of social networks, and more. Linear

regression is an important part of this.

Linear regression is one of the fundamental statistical and machine learning techniques. Whether you want to do [statistics](#), [machine learning](#), or scientific computing, there are good chances that you'll need it. It's advisable to learn it first and then proceed towards more complex methods.

By the end of this article, you'll have learned:

- What linear regression is
- What linear regression is used for
- How linear regression works
- How to implement linear regression

Free Bonus: [Click here to get access](#) to videos, and books for improving your Python skills.

```
1 # How to merge two dicts
2 # in Python 3.5+
3
4 >>> x = {'a': 1, 'b': 2}
5 >>> y = {'b': 3, 'c': 4}
6
7 >>> z = {**x, **y}
8
9 >>> z
10 {'c': 4, 'a': 1, 'b': 3}
```



[Remove ads](#)

Improve Your Python

...with a fresh **Python Trick** code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

Regression

Regression analysis is one of the most important fields in statistics and machine learning. There are many regression methods available. Linear regression is one of them.

What Is Regression?

Regression searches for relationships among [variables](#).

[Improve Your Python](#)

For example, you can observe several employees of some company and try to understand how their salaries depend on the **features**, such as experience, level of education, role, city they work in, and so on.

This is a regression problem where data related to each employee represent one **observation**. The presumption is that the experience, education, role, and city are the independent features, while the salary depends on them.

Similarly, you can try to establish a mathematical dependence of the prices of houses on their areas, numbers of bedrooms, distances to the city center, and so on.

Generally, in regression analysis, you usually consider some phenomenon of interest and have a number of observations. Each observation has two or more features. Following the assumption that (at least) one of the features depends on the others, you try to establish a relation among them.

In other words, **you need to find a function that maps some features or variables to others sufficiently well**.

The dependent features are called the **dependent variables**, **outputs**, or **responses**.

The independent features are called the **independent variables**, **inputs**, or **predictors**.

Regression problems usually have one continuous and unbounded dependent variable. The inputs, however, can be continuous, discrete, or even categorical data such as gender, nationality, brand, and so on.

It is a common practice to denote the outputs with y and inputs with x . If there are two or more independent variables, they can be represented as the vector $\mathbf{x} = (x_1, \dots, x_r)$, where r is the number of inputs.

When Do You Need Regression?

Typically, you need regression to answer whether and how some phenomenon influences the other or **how several variables are related**. For example, you can use it to determine *if* and *to what extent* the experience or gender impact salaries.

Regression is also useful when you want **to forecast a response** using a new set of predictors. For example, you could try to predict electricity consumption of a household for the next hour given the outdoor temperature, time of day, and number of residents in that household.

Regression is used in many different fields: economy, computer science, social sciences, and so on. Its importance rises every day with the availability of large amounts of data and increased awareness of the practical value of data.

Linear Regression

Linear regression is probably one of the most important and widely used regression techniques. It's among the simplest regression methods. One of its main advantages is that it's very easy to implement.

Problem Formulation

When implementing linear regression of $y = b_0 + b_1 x_1 + \dots + b_r x_r$, where r is the number of predictors, y is the response variable and x_i are the predictors. This equation is the **regression equation**.

```
1 # How to merge two dicts
2 # in Python 3.5+
3
4 >>> x = {'a': 1, 'b': 2}
5 >>> y = {'b': 3, 'c': 4}
6
7 >>> z = {**x, **y}
8
9 >>> z
10 {'c': 4, 'a': 1, 'b': 3}
```

Improve Your Python

...with a fresh  **Python Trick**  code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

Linear regression calculates the **estimate** $\hat{y}_i = b_0 + b_1 x_{i1} + \dots + b_r x_{ir}$ with b_0, b_1, \dots, b_r . They define the **estimated response** \hat{y}_i and capture the dependencies between the inputs and output sufficiently well.

The **estimated or predicted response**, $f(\mathbf{x}_i)$, for each observation $i = 1, \dots, n$, should be as close as possible to the corresponding **actual response** y_i . The differences $y_i - f(\mathbf{x}_i)$ for all observations $i = 1, \dots, n$, are called the **residuals**. Regression is about determining the **best predicted weights**, that is the weights corresponding to the smallest residuals.

To get the best weights, you usually **minimize the sum of squared residuals** (SSR) for all observations $i = 1, \dots, n$: $SSR = \sum_i (y_i - f(\mathbf{x}_i))^2$. This approach is called the **method of ordinary least squares**.



Improve Your Python

[Learn Python With a Community of Experts »](#)

 [Remove ads](#)

Regression Performance

The variation of actual responses $y_i, i = 1, \dots, n$, occurs partly due to the dependence on the predictors \mathbf{x}_i . However, there is also an additional inherent variance of the output.


The **coefficient of determination**, denoted as R^2 , tells you which amount of variation in y can be explained by the dependence on \mathbf{x} using the particular regression model. Larger R^2 indicates a better fit and means that the model can better explain the variation of the output with different inputs.

The value $R^2 = 1$ corresponds to $SSR = 0$, that is to the **perfect fit** since the values of predicted and actual responses fit completely to each other.

Simple Linear Regression

Simple or single-variate linear regression is the simplest case of linear regression with a single independent variable, $\mathbf{x} = x$.

The following figure illustrates simple linear regression:

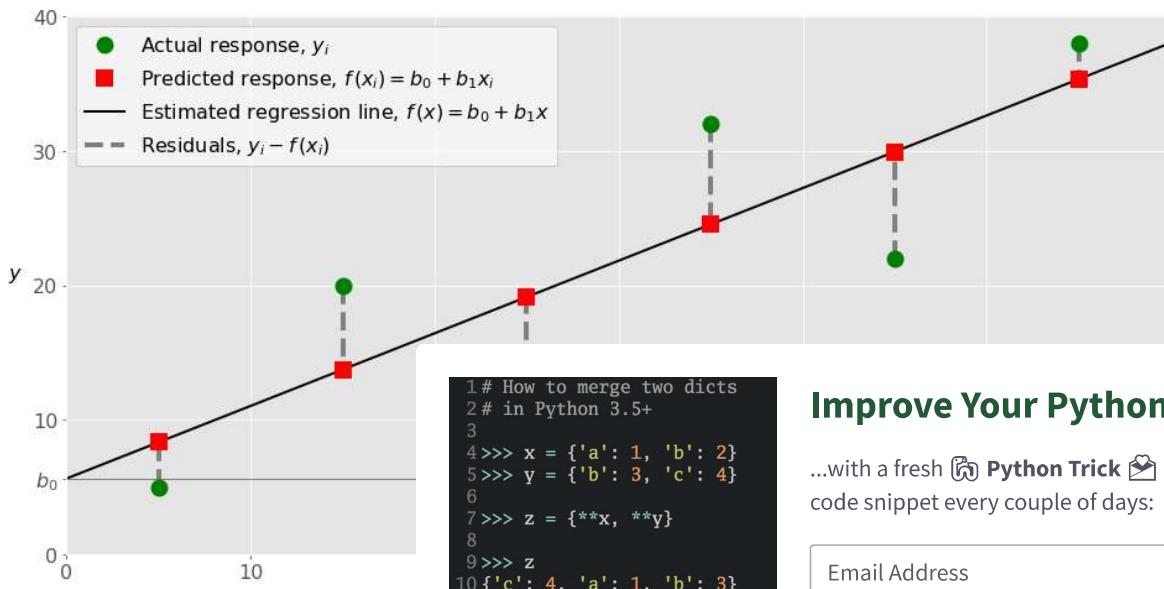

Improve Your Python

...with a fresh **Python Trick** code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

When implementing simple linear regres:

circles). These pairs are your observations. For example, the leftmost observation (green circle) has the input $x = 5$ and the actual output (response) $y = 5$. The next one has $x = 15$ and $y = 20$, and so on.

The estimated regression function (black line) has the equation $f(x) = b_0 + b_1x$. Your goal is to calculate the optimal values of the predicted weights b_0 and b_1 that minimize SSR and determine the estimated regression function. The value of b_0 , also called the **intercept**, shows the point where the estimated regression line crosses the y axis. It is the value of the estimated response $f(x)$ for $x = 0$. The value of b_1 determines the **slope** of the estimated regression line.

The predicted responses (red squares) are the points on the regression line that correspond to the input values. For example, for the input $x = 5$, the predicted response is $f(5) =$ [Improve Your Python](#)

The residuals (vertical dashed gray lines) can be calculated as $y_i - f(x_i) = y_i - b_0 - b_1x_i$ for $i = 1, \dots, n$. They are the distances between the green circles and red squares. When you implement linear regression, you are actually trying to minimize these distances and make the red squares as close to the predefined green circles as possible.

Multiple Linear Regression

Multiple or multivariate linear regression is a case of linear regression with two or more independent variables.

If there are just two independent variables, the estimated regression function is $f(x_1, x_2) = b_0 + b_1x_1 + b_2x_2$. It represents a regression plane in a three-dimensional space. The goal of regression is to determine the values of the weights b_0 , b_1 , and b_2 such that this plane is as close as possible to the actual responses and yield the minimal SSR.

The case of more than two independent variables is similar, but more general. The estimated regression function is $f(x_1, \dots, x_r) = b_0 + b_1x_1 + \dots + b_rx_r$, and there are $r + 1$ weights to be determined when the number of inputs is r .

Polynomial Regression

You can regard polynomial regression as a generalized case of linear regression. You assume the polynomial dependence between the output and inputs and, consequently, the polynomial estimated regression function.

In other words, in addition to linear terms like b_1x_1 , your regression function f can include non-linear terms such as $b_2x_1^2$, $b_3x_1^3$, or even $b_4x_1x_2$, $b_5x_1^2x_2$, and so on.

The simplest example of polynomial regression has a single independent variable, and the estimated regression function is a polynomial of degree 2: $f(x) = b_0 + b_1x + b_2x^2$.

Now, remember that you want to calculate b_0 , b_1 , and b_2 , which minimize SSR. These are your unknowns!

Keeping this in mind, compare the previous regression function with the function $f(x_1, x_2) = b_0 + b_1x_1 + b_2x_2$ used for linear regression. They look very similar and are both linear functions of the unknowns b_0 , b_1 , and b_2 . This is why you can **solve the polynomial regression problem as a linear problem** with the term x^2 regarded as an input variable.

In the case of two variables and the polynomial of degree 2, the regression function has this form: $f(x_1, x_2) = b_0 + b_1x_1 + b_2x_2 + b_3x_1^2 + b_4x_1x_2 + b_5x_2^2$. The procedure for solving the problem is identical to the previous case. You apply linear regression for five inputs: x_1 , x_2 , x_1^2 , x_1x_2 , and x_2^2 . What you get as the result of regression are the values of six weights which minimize SSR: b_0 , b_1 , b_2 , b_3 , b_4 , and b_5 .

Of course, there are more general problems, but this should be enough to illustrate the point.

 [Become a Python Expert »](#) X

[Remove ads](#)

Underfitting and Overfitting

One very important question that might arise is the choice of the optimal degree of the polynomial.

```
1 # How to merge two dicts
2 # in Python 3.5+
3
4 >>> x = {'a': 1, 'b': 2}
5 >>> y = {'b': 3, 'c': 4}
6
7 >>> z = {**x, **y}
8
9 >>> z
10 {'c': 4, 'a': 1, 'b': 3}
```

There is no straightforward rule for doing this. It depends on the specific problem that might follow the choice of the polynomial degree.

Underfitting occurs when a model can't accurately capture the dependencies among data, usually as a consequence of its own simplicity. It often yields a low R^2 with known data and bad generalization capabilities when applied with new data.

Overfitting happens when a model learns both dependencies among data and random fluctuations. In other words, a model learns the existing data too well. Complex models, which have many features or terms, are often prone to overfitting. When applied to known data, such models usually yield high R^2 . However, they often don't generalize well and have significantly lower R^2 when used with new data.





The next figure illustrates the underfitted, well-fitted, and overfitted models.

[Improve Your Python](#)

...with a fresh  [Python Trick](#)  code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

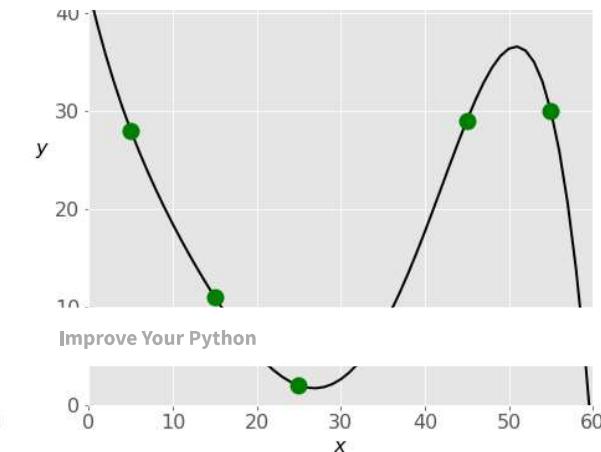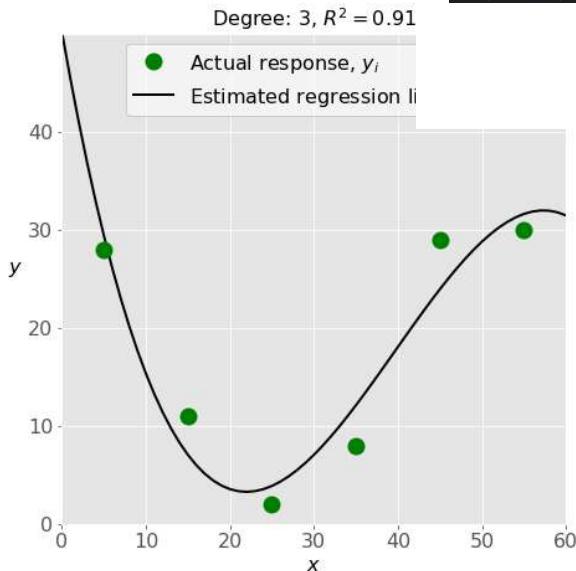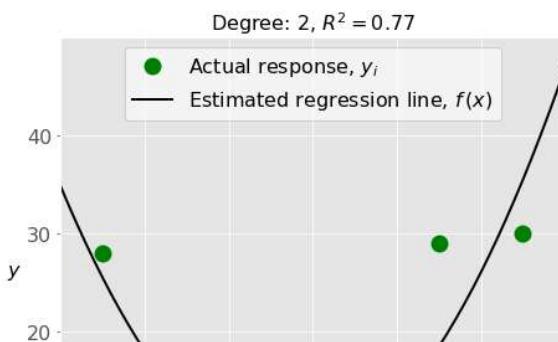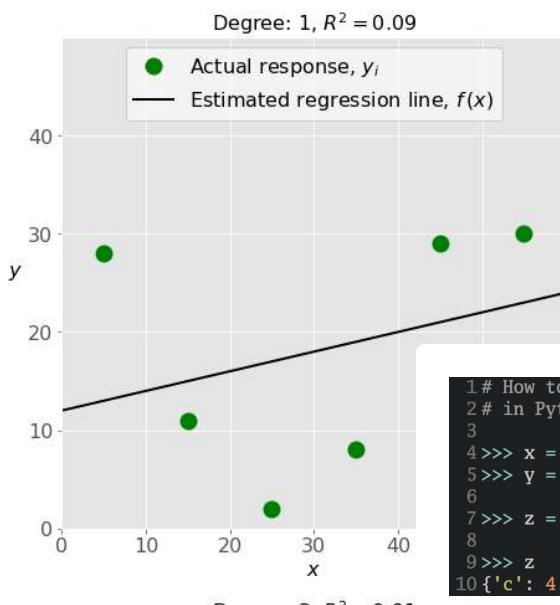

Example of underfitted, well-fitted and overfitted models

The top left plot shows a linear regression line that has a low R^2 . It might also be important that a straight line can't take into account the fact that the actual response increases as x moves away from 25 towards zero. This is likely an example of underfitting.

The top right plot illustrates polynomial regression with the degree equal to 2. In this instance, this might be the optimal degree for modeling this data. The model has a value of R^2 that is satisfactory in many cases and shows trends nicely.

The bottom left plot presents polynomial regression with the degree equal to 3. The value of R^2 is higher than in the preceding cases. This model behaves better with known data than the previous ones. However, it shows some signs of overfitting, especially for the input values close to 60 where the line starts decreasing, although actual data don't show that.

Finally, on the bottom right plot, you can see the perfect fit: six points and the polynomial line of the degree 5 (or higher) yield $R^2 = 1$. Each actual response equals its corresponding prediction.

In some situations, this might be exactly what you're looking for. In many cases, however, this is an overfitted model. It is likely to have poor behavior with unseen data, especially with the inputs larger than 50.

For example, it assumes, without any evidence, that there is a significant drop in responses for $x > 50$ and that y reaches zero for x near 60. Such behavior is the consequence of excessive effort to learn and fit the existing data.

There are a lot of resources where you can find more information about regression in general and linear regression in particular. The [regression analysis page on Wikipedia](#), [Wikipedia's linear regression article](#), as well as [Khan Academy's linear regression article](#) are good starting points.

Improve Your Python

...with a fresh **Python Trick** code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

IMPLEMENTING LINEAR REGRESSION IN PYTHON

It's time to start implementing linear regression in Python. Basically, all you should do is apply the proper packages and their functions and classes.

Python Packages for Linear Regression

The package **NumPy** is a fundamental Python scientific package that allows many high-performance operations on single- and multi-dimensional arrays. It also offers many mathematical routines. Of course, it's open source.

If you're not familiar with NumPy, you can use the official NumPy User Guide and read [Look Ma. No For-Loops: Array Programming With NumPy](#). In addition, [E](#) a pretty good idea on the performance ga

The package **scikit-learn** is a widely used packages. It provides the means for pre classification, clustering, and more. Like I

You can check the page [Generalized Line](#); get deeper insight into how this package

```
1 # How to merge two dicts
2 # in Python 3.5+
3
4 >>> x = {'a': 1, 'b': 2}
5 >>> y = {'b': 3, 'c': 4}
6
7 >>> z = {**x, **y}
8
9 >>> z
10 {'c': 4, 'a': 1, 'b': 3}
```

Improve Your Python

...with a fresh  **Python Trick**  code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

If you want to implement linear regression consider **statsmodels**. It's a powerful Python package for the estimation of statistical models, performing tests, and more. It's open source as well.

You can find more information on **statsmodels** on [its official web site](#).



[Real Python for Teams »](#)
Upskill Your Tech Teams From Anywhere

[Remove ads](#)

[Improve Your Python](#)

Simple Linear Regression With scikit-learn

Let's start with the simplest case, which is simple linear regression.

There are five basic steps when you're implementing linear regression:

1. Import the packages and classes you need.
2. Provide data to work with and eventually do appropriate transformations.
3. Create a regression model and fit it with existing data.
4. Check the results of model fitting to know whether the model is satisfactory.
5. Apply the model for predictions.

These steps are more or less general for most of the regression approaches and implementations.

Step 1: Import packages and classes

The first step is to import the package `numpy` and the class `LinearRegression` from `sklearn.linear_model`:

Python

```
import numpy as np
from sklearn.linear_model import LinearRegression
```

Now, you have all the functionalities you need to implement linear regression.

The fundamental data type of NumPy is the array type called `numpy.ndarray`. The rest of this article uses the term **array** to refer to instances of the type `numpy.ndarray`.

The class `sklearn.linear_model.LinearRegression` will be used to perform linear and polynomial regression and make predictions accordingly.

Step 2: Provide data

The second step is defining data to work with. The inputs (regressors, x) and output (predictor, y) should be arrays (the instances of the class `numpy.ndarray`) or similar objects. This is the simplest way of providing data for regression:

Python

```
x = np.array([5, 15, 25, 35, 45, 55]).reshape((-1, 1))
y = np.array([5, 20, 14, 32, 22, 38])
```

Now, you have two arrays: the input x and the output y . x is **two-dimensional**, or to be more precise, it has two dimensions. That's what the argument `(-1, 1)` of `.reshape()` means.

This is how x and y look now:

```
1 # How to merge two dicts
2 # in Python 3.5+
3
4 >>> x = {'a': 1, 'b': 2}
5 >>> y = {'b': 3, 'c': 4}
6
7 >>> z = {**x, **y}
8
9 >>> z
10 {'c': 4, 'a': 1, 'b': 3}
```

Improve Your Python

...with a fresh  **Python Trick**  code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

Python

```
>>> print(x)
[[ 5]
 [15]
 [25]
 [35]
 [45]
 [55]]
>>> print(y)
[ 5 20 14 32 22 38]
```

As you can see, x has two dimensions, and $x.shape$ is $(6, 1)$, while y has a single dimension, and $y.shape$ is $(6,)$.

Step 3: Create a model and fit it

[Improve Your Python](#)

The next step is to create a linear regression model and fit it using the existing data.

Let's create an instance of the class `LinearRegression`, which will represent the regression model:

Python

```
model = LinearRegression()
```

This statement creates the variable `model` as the instance of `LinearRegression`. You can provide several optional parameters to `LinearRegression`:

- `fit_intercept` is a Boolean (`True` by default) that decides whether to calculate the intercept b_0 (`True`) or consider it equal to zero (`False`).
- `normalize` is a Boolean (`False` by default) that decides whether to normalize the input variables (`True`) or not (`False`).
- `copy_X` is a Boolean (`True` by default) that decides whether to copy (`True`) or overwrite the input variables (`False`).
- `n_jobs` is an integer or `None` (default) and represents the number of jobs used in parallel computation. `None` usually means one job and `-1` to use all processors.

This example uses the default values of all parameters.

It's time to start using the model. First, you need to call `.fit()` on `model`:

Python

```
model.fit(x, y)
```

With `.fit()`, you calculate the optimal values of the weights b_0 and b_1 , using the existing input and output (x and y) as the arguments. In other words, `.fit()` **fits the model**. It returns `self`, which is the variable `model` itself. That's why you can replace the last two statements with this one:

Python

```
model = LinearRegression().fit(x, y)
```

This statement does the same thing as the previous two. It's just shorter.

Step 4: Get results

Once you have your model fitted, you can get the results to check whether the model works satisfactorily and interpret it.

You can obtain the coefficient of determination (R^2) with `.score()` called on `model`:

Python

```
>>> r_sq = model.score(x, y)
>>> print('coefficient of determination: ', r_sq)
coefficient of determination:  0.715872340425
```

When you're applying `.score()`, the argument

```
1 # How to merge two dicts
2 # in Python 3.5+
3
4 >>> x = {'a': 1, 'b': 2}
5 >>> y = {'b': 3, 'c': 4}
6
7 >>> z = {**x, **y}
8
9 >>> z
10 {'c': 4, 'a': 1, 'b': 3}
```

The attributes of `model` are `.intercept_`, `v`

Python

```
>>> print('intercept:', model.intercept_)
intercept: 5.633333333333329
>>> print('slope:', model.coef_)
slope: [0.54]
```

Improve Your Python

...with a fresh  **Python Trick**  code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

The code above illustrates how to get b_0 and b_1 . You can notice that `.intercept_` is a scalar, while `.coef_` is an array.

The value $b_0 = 5.63$ (approximately) illustrates that your model predicts the response 5.63 when x is zero. The value $b_1 = 0.54$ means that the predicted response rises by 0.54 when x is increased by one.

You should notice that you can provide `y` as a two-dimensional array. This is how it might look:

Python

```
>>> new_model = LinearRegression().fit(x, y.reshape((-1, 1)))
>>> print('intercept:', new_model.intercept_)
intercept: [5.6333333]
>>> print('slope:', new_model.coef_)
slope: [[0.54]]
```

As you can see, this example is very similar to the previous one, but in this case, `.intercept_` is a one-dimensional array with the single element b_0 , and `.coef_` is a two-dimensional array with the single element b_1 .

Step 5: Predict response

Once there is a satisfactory model, you can use it for predictions with either existing or new data.

To obtain the predicted response, use `.predict()`:

Python

```
>>> y_pred = model.predict(x)
>>> print('predicted response:', y_pred, sep='\n')
predicted response:
[ 8.33333333 13.73333333 19.13333333 24.53333333 29.93333333 35.33333333]
```

When applying `.predict()`, you pass the regressor as the argument and get the corresponding predicted response.

This is a nearly identical way to predict the response:

Python

```
>>> y_pred = model.intercept_ + model.coef_ * x
>>> print('predicted response:', y_pred, sep='\n')
predicted response:
[[ 8.33333333]
```

>>>

>>>

```
[13.73333333]
[19.13333333]
[24.53333333]
[29.93333333]
[35.33333333]]
```

In this case, you multiply each element of `x` with `model.coef_` and add `model.intercept_` to the product.

The output here differs from the previous example only in dimensions. The predicted response is now a two-dimensional array, while in the previous case, it had one dimension.

If you reduce the number of dimensions (by replacing `x` with `x.reshape(-1)`, `x.flat`)

In practice, regression models are often a function of the outputs based on some other, new input variable.

Python

```
>>> x_new = np.arange(5).reshape((-1,
>>> print(x_new)
[[0]
 [1]
 [2]
 [3]
 [4]]
>>> y_new = model.predict(x_new)
>>> print(y_new)
[5.63333333 6.17333333 6.71333333 7.25333333 7.79333333]
```

Improve Your Python

...with a fresh  **Python Trick**  code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

Here `.predict()` is applied to the new regressor `x_new` and yields the response `y_new`. This example conveniently uses `arange()` from `numpy` to generate an array with the elements from 0 (inclusive) to 5 (exclusive), that is 0, 1, 2, 3, and 4.

You can find more information about `LinearRegression` on [tl](#) [Improve Your Python](#)



[Online Python Training for Teams & Enterprise »](#)

[Remove ads](#)

Multiple Linear Regression With scikit-learn

You can implement multiple linear regression following the same steps as you would for simple regression.

Steps 1 and 2: Import packages and classes, and provide data

First, you import `numpy` and `sklearn.linear_model.LinearRegression` and provide known inputs and output:

Python

```
import numpy as np
from sklearn.linear_model import LinearRegression

x = [[0, 1], [5, 1], [15, 2], [25, 5], [35, 11], [45, 15], [55, 34], [60, 35]]
y = [4, 5, 20, 14, 32, 22, 38, 43]
x, y = np.array(x), np.array(y)
```

That's a simple way to define the input `x` and output `y`. You can print `x` and `y` to see how they look now:

Python

```
>>> print(x)
[[ 0  1]
 [ 5  1]
 [15  2]
 [25  5]
 [35 11]
 [45 15]
 [55 34]
 [60 35]]
```

>>>

```
[45 15]
[55 34]
[60 35]]
>>> print(y)
[ 4  5 20 14 32 22 38 43]
```

In multiple linear regression, x is a two-dimensional array with at least two columns, while y is usually a one-dimensional array. This is a simple example of multiple linear regression, and x has exactly two columns.

Step 3: Create a model and fit it

The next step is to create the regression r

Python

```
model = LinearRegression().fit(x, y)
```

The result of this statement is the variable $model$, which contains a regression model fitted with existing data.

```
1 # How to merge two dicts
2 # in Python 3.5+
3
4 >>> x = {'a': 1, 'b': 2}
5 >>> y = {'b': 3, 'c': 4}
6
7 >>> z = {**x, **y}
8
9 >>> z
10 {'c': 4, 'a': 1, 'b': 3}
```

Improve Your Python

...with a fresh  **Python Trick**  code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

Step 4: Get results

You can obtain the properties of the model in the same way as in the case of simple linear regression:

Python

```
>>> r_sq = model.score(x, y)
>>> print('coefficient of determination:', r_sq)
coefficient of determination: 0.8615939258756776
>>> print('intercept:', model.intercept_)
intercept: 5.52257927519819
>>> print('slope:', model.coef_)
slope: [0.44706965 0.25502548]
```

Improve Your Python

You obtain the value of R^2 using `.score()` and the values of the estimators of regression coefficients with `.intercept_` and `.coef_`. Again, `.intercept_` holds the bias b_0 , while now `.coef_` is an array containing b_1 and b_2 respectively.

In this example, the intercept is approximately 5.52, and this is the value of the predicted response when $x_1 = x_2 = 0$. The increase of x_1 by 1 yields the rise of the predicted response by 0.45. Similarly, when x_2 grows by 1, the response rises by 0.26.

Step 5: Predict response

Predictions also work the same way as in the case of simple linear regression:

Python

```
>>> y_pred = model.predict(x)
>>> print('predicted response:', y_pred, sep='\n')
predicted response:
[ 5.77760476  8.012953  12.73867497 17.9744479  23.97529728 29.4660957
 38.78227633 41.27265006]
```

The predicted response is obtained with `.predict()`, which is very similar to the following:

Python

```
>>> y_pred = model.intercept_ + np.sum(model.coef_ * x, axis=1)
>>> print('predicted response:', y_pred, sep='\n')
predicted response:
[ 5.77760476  8.012953  12.73867497 17.9744479  23.97529728 29.4660957
 38.78227633 41.27265006]
```

You can predict the output values by multiplying each column of the input with the appropriate weight, summing the results and adding the intercept to the sum.

You can apply this model to new data as well:

Python

>>>

```

>>> x_new = np.arange(10).reshape((-1, 2))
>>> print(x_new)
[[0 1]
 [2 3]
 [4 5]
 [6 7]
 [8 9]]
>>> y_new = model.predict(x_new)
>>> print(y_new)
[ 5.77760476  7.18179502  8.58598528  9.99017554 11.3943658 ]

```

That's the prediction using a linear regression model.



Online Python
Give your team

[Remove ads](#)

```

1 # How to merge two dicts
2 # in Python 3.5+
3
4 >>> x = {'a': 1, 'b': 2}
5 >>> y = {'b': 3, 'c': 4}
6
7 >>> z = {**x, **y}
8
9 >>> z
10 {'c': 4, 'a': 1, 'b': 3}

```

Improve Your Python

...with a fresh **Python Trick** code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

Polynomial Regression With scikit-learn

Implementing polynomial regression with scikit-learn is very similar to linear regression. There is only one extra step: you need to transform the array of inputs to include non-linear terms such as x^2 .

Step 1: Import packages and classes

In addition to numpy and sklearn.linear_model.LinearRegression, you should also import the class PolynomialFeatures from sklearn.preprocessing:

Python

```

import numpy as np
from sklearn.linear_model import LinearRegression
from sklearn.preprocessing import PolynomialFeatures

```

[Improve Your Python](#)

The import is now done, and you have everything you need to work with.

Step 2a: Provide data

This step defines the input and output and is the same as in the case of linear regression:

Python

```

x = np.array([5, 15, 25, 35, 45, 55]).reshape((-1, 1))
y = np.array([15, 11, 2, 8, 25, 32])

```

Now you have the input and output in a suitable format. Keep in mind that you need the input to be a **two-dimensional array**. That's why .reshape() is used.

Step 2b: Transform input data

This is the **new step** you need to implement for polynomial regression!

As you've seen earlier, you need to include x^2 (and perhaps other terms) as additional features when implementing polynomial regression. For that reason, you should transform the input array x to contain the additional column(s) with the values of x^2 (and eventually more features).

It's possible to transform the input array in several ways (like using insert() from numpy), but the class PolynomialFeatures is very convenient for this purpose. Let's create an instance of this class:

Python

```

transformer = PolynomialFeatures(degree=2, include_bias=False)

```

The variable transformer refers to an instance of PolynomialFeatures which you can use to transform the input x.

You can provide several optional parameters to `PolynomialFeatures`:

- `degree` is an integer (2 by default) that represents the degree of the polynomial regression function.
- `interaction_only` is a Boolean (`False` by default) that decides whether to include only interaction features (`True`) or all features (`False`).
- `include_bias` is a Boolean (`True` by default) that decides whether to include the bias (intercept) column of ones (`True`) or not (`False`).

This example uses the default values of all parameters, but you'll sometimes want to experiment with the degree of the function, and it can be beneficial to provide this argument anyway.

Before applying transformer, you need to

Python

```
transformer.fit(x)
```

Once transformer is fitted, it's ready to cr

```
1 # How to merge two dicts
2 # in Python 3.5+
3
4 >>> x = {'a': 1, 'b': 2}
5 >>> y = {'b': 3, 'c': 4}
6
7 >>> z = {**x, **y}
8
9 >>> z
10 {'c': 4, 'a': 1, 'b': 3}
```

Improve Your Python

...with a fresh  [Python Trick](#)  code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

Python

```
x_ = transformer.transform(x)
```

That's the transformation of the input array with `.transform()`. It takes the input array as the argument and returns the modified array.

You can also use `.fit_transform()` to replace the three previous statements with only one:

Python

```
x_ = PolynomialFeatures(degree=2, include_bias=False).fit_transform(x)
```

[Improve Your Python](#)

That's fitting and transforming the input array in one statement with `.fit_transform()`. It also takes the input array and effectively does the same thing as `.fit()` and `.transform()` called in that order. It also returns the modified array. This is how the new input array looks:

Python

```
>>> print(x_)
[[ 5.  25.]
 [ 15. 225.]
 [ 25. 625.]
 [ 35. 1225.]
 [ 45. 2025.]
 [ 55. 3025.]]
```

>>>

The modified input array contains two columns: one with the original inputs and the other with their squares.

You can find more information about `PolynomialFeatures` on [the official documentation page](#).

Step 3: Create a model and fit it

This step is also the same as in the case of linear regression. You create and fit the model:

Python

```
model = LinearRegression().fit(x_, y)
```

The regression model is now created and fitted. It's ready for application.

You should keep in mind that the first argument of `.fit()` is the *modified input array* `x_` and not the original `x`.

Step 4: Get results

You can obtain the properties of the model the same way as in the case of linear regression:

Python

>>>

```
>>> r_sq = model.score(x_, y)
>>> print('coefficient of determination:', r_sq)
coefficient of determination: 0.8908516262498564
>>> print('intercept:', model.intercept_)
intercept: 21.372321428571425
>>> print('coefficients:', model.coef_)
coefficients: [-1.32357143  0.02839286]
```

Again, `.score()` returns R^2 . Its first argument is also the modified input `x_`, not `x`. The values of the weights are associated to `.intercept_` and `.coef_`: b_0 and b_1 respectively.

You can obtain a very similar result with `PolynomialFeatures`:

Python

```
x_ = PolynomialFeatures(degree=2, inclu
```

```
1 # How to merge two dicts
2 # in Python 3.5+
3
4 >>> x = {'a': 1, 'b': 2}
5 >>> y = {'b': 3, 'c': 4}
6
7 >>> z = {**x, **y}
8
9 >>> z
10 {'c': 4, 'a': 1, 'b': 3}
```

Improve Your Python

X

...with a fresh  **Python Trick**  code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

If you call `PolynomialFeatures` with the `degree=2` parameter, it adds a new input array `x_` with the additional leftmost column of ones. This is how the modified input array looks in this case:

Python

>>>

```
>>> print(x_)
[[1.000e+00 5.000e+00 2.500e+01]
 [1.000e+00 1.500e+01 2.250e+02]
 [1.000e+00 2.500e+01 6.250e+02]
 [1.000e+00 3.500e+01 1.225e+03]
 [1.000e+00 4.500e+01 2.025e+03]
 [1.000e+00 5.500e+01 3.025e+03]]
```

Improve Your Python

The first column of `x_` contains ones, the second has the values of `x`, while the third holds the squares of `x`.

The intercept is already included with the leftmost column of ones, and you don't need to include it again when creating the instance of `LinearRegression`. Thus, you can provide `fit_intercept=False`. This is how the next statement looks:

Python

```
model = LinearRegression(fit_intercept=False).fit(x_, y)
```

The variable `model` again corresponds to the new input array `x_`. Therefore `x_` should be passed as the first argument instead of `x`.

This approach yields the following results, which are similar to the previous case:

Python

>>>

```
>>> r_sq = model.score(x_, y)
>>> print('coefficient of determination:', r_sq)
coefficient of determination: 0.8908516262498565
>>> print('intercept:', model.intercept_)
intercept: 0.0
>>> print('coefficients:', model.coef_)
coefficients: [21.37232143 -1.32357143  0.02839286]
```

You see that now `.intercept_` is zero, but `.coef_` actually contains b_0 as its first element. Everything else is the same.

Step 5: Predict response

If you want to get the predicted response, just use `.predict()`, but remember that the argument should be the modified input `x_` instead of the old `x`:

Python

>>>

```
>>> y_pred = model.predict(x_)  
>>> print('predicted response:', y_pred, sep='\n')  
predicted response:  
[15.46428571  7.90714286  6.02857143  9.82857143 19.30714286 34.46428571]
```

As you can see, the prediction works almost perfectly with the modified input instead of the original.

You can apply the identical procedure if you have one column, but everything else is the same:

```
1 # How to merge two dicts  
2 # in Python 3.5+  
3  
4 >>> x = {'a': 1, 'b': 2}  
5 >>> y = {'b': 3, 'c': 4}  
6  
7 >>> z = {**x, **y}  
8  
9 >>> z  
10 {'c': 4, 'a': 1, 'b': 3}
```

Improve Your Python

...with a fresh  **Python Trick**  code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

Python

```
# Step 1: Import packages  
import numpy as np  
from sklearn.linear_model import LinearRegression  
from sklearn.preprocessing import PolynomialFeatures  
  
# Step 2a: Provide data  
x = [[0, 1], [5, 1], [15, 2], [25, 5], [35, 11], [45, 15], [55, 34], [60, 35]]  
y = [4, 5, 20, 14, 32, 22, 38, 43]  
x, y = np.array(x), np.array(y)  
  
# Step 2b: Transform input data  
x_ = PolynomialFeatures(degree=2, include_bias=False).fit_transform(x)  
  
# Step 3: Create a model and fit it  
model = LinearRegression().fit(x_, y)  
  
# Step 4: Get results  
r_sq = model.score(x_, y)  
intercept, coefficients = model.intercept_, model.coef_  
  
# Step 5: Predict  
y_pred = model.predict(x_)
```

Improve Your Python

This regression example yields the following results and predictions:

Python

>>>

```
>>> print('coefficient of determination:', r_sq)  
coefficient of determination: 0.9453701449127822  
>>> print('intercept:', intercept)  
intercept: 0.8430556452395734  
>>> print('coefficients:', coefficients, sep='\n')  
coefficients:  
[ 2.44828275  0.16160353 -0.15259677  0.47928683 -0.4641851 ]  
>>> print('predicted response:', y_pred, sep='\n')  
predicted response:  
[ 0.54047408 11.36340283 16.07809622 15.79139     29.73858619 23.50834636  
 39.05631386 41.92339046]
```

In this case, there are six regression coefficients (including the intercept), as shown in the estimated regression function $f(x_1, x_2) = b_0 + b_1x_1 + b_2x_2 + b_3x_1^2 + b_4x_1x_2 + b_5x_2^2$.

You can also notice that polynomial regression yielded a higher coefficient of determination than multiple linear regression for the same problem. At first, you could think that obtaining such a large R^2 is an excellent result. It might be.

However, in real-world situations, having a complex model and R^2 very close to 1 might also be a sign of overfitting. To check the performance of a model, you should test it with new data, that is with observations not used to fit (train) the model. To learn how to split your dataset into the training and test subsets, check out [Split Your Dataset With scikit-learn's train_test_split\(\)](#).



Onl
i Remove ads

Advanced Linear Regression

You can implement linear regression in Python. This is desirable when there is a need for more control over the process.

The procedure is similar to that of scikit-learn:

Step 1: Import packages

First you need to do some imports. In addition to numpy, you need to import statsmodels.api:

```
Python
import numpy as np
import statsmodels.api as sm
```

Now you have the packages you need.

Step 2: Provide data and transform inputs

You can provide the inputs and outputs the same way as you did when you were using scikit-learn:

```
Python
x = [[0, 1], [5, 1], [15, 2], [25, 5], [35, 11], [45, 15], [55, 34], [60, 35]]
y = [4, 5, 20, 14, 32, 22, 38, 43]
x, y = np.array(x), np.array(y)
```

The input and output arrays are created, but the job is not done yet.

You need to add the column of ones to the inputs if you want statsmodels to calculate the intercept b_0 . It doesn't take b_0 into account by default. This is just one function call:

```
Python
x = sm.add_constant(x)
```

That's how you add the column of ones to x with `add_constant()`. It takes the input array x as an argument and returns a new array with the column of ones inserted at the beginning. This is how x and y look now:

```
Python
>>> print(x)
[[ 1.  0.  1.]
 [ 1.  5.  1.]
 [ 1. 15.  2.]
 [ 1. 25.  5.]
 [ 1. 35. 11.]
 [ 1. 45. 15.]
 [ 1. 55. 34.]
 [ 1. 60. 35.]]
>>> print(y)
[ 4  5 20 14 32 22 38 43]
```

Improve Your Python X

...with a fresh  **Python Trick**  code snippet every couple of days:

Email Address

Send Python Tricks »

You can see that the modified `x` has three columns: the first column of ones (corresponding to b_0 and replacing the intercept) as well as two columns of the original features.

Step 3: Create a model and fit it

The regression model based on ordinary least squares is an instance of the class `statsmodels.regression.linear_model.OLS`. This is how you can obtain one:

Python

```
model = sm.OLS(y, x)
```

You should be careful here! Please, notice several more optional parameters.

To find more information about this class

```
1 # How to merge two dicts
2 # in Python 3.5+
3
4 >>> x = {'a': 1, 'b': 2}
5 >>> y = {'b': 3, 'c': 4}
6
7 >>> z = {**x, **y}
8
9 >>> z
10 {'c': 4, 'a': 1, 'b': 3}
```

Once your model is created, you can apply

Python

```
results = model.fit()
```

Improve Your Python

...with a fresh  [Python Trick](#)  code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

By calling `.fit()`, you obtain the variable `results`, which is an instance of the class `statsmodels.regression.linear_model.RegressionResultsWrapper`. This object holds a lot of information about the regression model.

Step 4: Get results

The variable `results` refers to the object that contains detailed information about the results of linear regression. Explaining them is far beyond the scope of this article, but you [Improve Your Python](#)

You can call `.summary()` to get the table with the results of linear regression:

Python

```
>>> print(results.summary())
OLS Regression Results
=====
Dep. Variable:                  y      R-squared:     0.862
Model:                          OLS      Adj. R-squared:  0.806
Method:                         Least Squares   F-statistic:   15.56
Date:                Sun, 17 Feb 2019   Prob (F-statistic):  0.00713
Time:                    19:15:07      Log-Likelihood: -24.316
No. Observations:                 8      AIC:             54.63
Df Residuals:                      5      BIC:             54.87
Df Model:                           2
Covariance Type:            nonrobust
=====
coef    std err        t      P>|t|      [0.025      0.975]
-----
const      5.5226     4.431      1.246      0.268     -5.867     16.912
x1         0.4471     0.285      1.567      0.178     -0.286      1.180
x2         0.2550     0.453      0.563      0.598     -0.910      1.420
=====
Omnibus:                   0.561   Durbin-Watson:       3.268
Prob(Omnibus):              0.755   Jarque-Bera (JB):  0.534
Skew:                      0.380   Prob(JB):          0.766
Kurtosis:                   1.987   Cond. No.           80.1
=====
Warnings:
[1] Standard Errors assume that the covariance matrix of the errors is correctly specified.
```

This table is very comprehensive. You can find many statistical values associated with linear regression including R^2 , b_0 , b_1 , and b_2 .

In this particular case, you might obtain the warning related to `kurtosistest`. This is due to the small number of

observations provided.

You can extract any of the values from the table above. Here's an example:

Python

>>>

```
>>> print('coefficient of determination:', results.rsquared)
coefficient of determination: 0.8615939258756777
>>> print('adjusted coefficient of determination:', results.rsquared_adj)
adjusted coefficient of determination: 0.8062314962259488
>>> print('regression coefficients:', results.params)
regression coefficients: [5.52257928 0.44706965 0.25502548]
```

That's how you obtain some of the result:

1. `.rsquared` holds R^2 .
2. `.rsquared_adj` represents adjusted R^2 .
3. `.params` refers the array with b_0, b_1, \dots, b_n .

You can also notice that these results are

To find more information about the result:

Step 5: Predict response

You can obtain the predicted response on the input values used for creating the model using `.fittedvalues` or `.predict()` with the input array as the argument:

Python

>>>

```
>>> print('predicted response:', results.fittedvalues, sep='\n')
predicted response:
[ 5.77760476  8.012953  12.73867497 17.9744479  23.97529728 29.4660957
 38.78227633 41.27265006]
>>> print('predicted response:', results.predict(x), sep='\n')
predicted response:
[ 5.77760476  8.012953  12.73867497 17.9744479  23.97529728 29.4660957
 38.78227633 41.27265006]
```

Improve Your Python

This is the predicted response for known inputs. If you want predictions with new regressors, you can also apply `.predict()` with new data as the argument:

Python

>>>

```
>>> x_new = sm.add_constant(np.arange(10).reshape((-1, 2)))
>>> print(x_new)
[[1.  0.  1.]
 [1.  2.  3.]
 [1.  4.  5.]
 [1.  6.  7.]
 [1.  8.  9.]]
>>> y_new = results.predict(x_new)
>>> print(y_new)
[ 5.77760476  7.18179502  8.58598528  9.99017554 11.3943658 ]
```

You can notice that the predicted results are the same as those obtained with scikit-learn for the same problem.



[Real Python for Teams »](#)
Unlock your team's potential

[Remove ads](#)

Beyond Linear Regression

Linear regression is sometimes not appropriate, especially for non-linear models of high complexity.

Fortunately, there are other regression techniques suitable for the cases where linear regression doesn't work well. Some of them are support vector machines, decision trees, random forest, and neural networks.

There are numerous Python libraries for regression using these techniques. Most of them are free and open-source. That's one of the reasons why Python is among the main programming languages for machine learning.

The package scikit-learn provides the means for using other regression techniques in a very similar way to what you've seen. It contains the classes for support vector machines, decision trees, random forest, and more, with the methods `.fit()`, `.predict()`, `.score()` and so on.

Conclusion

You now know what linear regression is a NumPy, scikit-learn, and statsmodels.

You use NumPy for handling arrays.

Linear regression is implemented with th

```
1 # How to merge two dicts
2 # in Python 3.5+
3
4 >>> x = {'a': 1, 'b': 2}
5 >>> y = {'b': 3, 'c': 4}
6
7 >>> z = {**x, **y}
8
9 >>> z
10 {'c': 4, 'a': 1, 'b': 3}
```

Improve Your Python

...with a fresh  **Python Trick**  code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

- **scikit-learn** if you don't need detail techniques
- **statsmodels** if you need the advanced statistical parameters of a model

Both approaches are worth learning how to use and exploring further. The links in this article can be very useful for that.

When performing linear regression in Python, you can follow these steps:

1. Import the packages and classes you need
2. Provide data to work with and eventually do appropriate transformations
3. Create a regression model and fit it with existing data 
4. Check the results of model fitting to know whether the ~~model is satisfactory~~
5. Apply the model for predictions

If you have questions or comments, please put them in the comment section below.

[Mark as Completed](#)



Python Tricks

Get a short & sweet **Python Trick** delivered to your inbox every couple of days. No spam ever. Unsubscribe any time. Curated by the Real Python team.

```
1 # How to merge two dicts
2 # in Python 3.5+
3
4 >>> x = {'a': 1, 'b': 2}
5 >>> y = {'b': 3, 'c': 4}
6
7 >>> z = {**x, **y}
8
9 >>> z
10 {'c': 4, 'a': 1, 'b': 3}
```

Email Address

[Send Me Python Tricks »](#)

About Mirko Stojiljković



Mirko has a Ph.D. in Mechanical Engineering and works as a university professor. He is a Pythonist who applies hybrid optimization and machine learning methods to support decision making in the energy sector.

[» More about Mirko](#)

Each tutorial at Real Python is created by a team of experts. The people who worked on this tutorial are:



Aldren

```
1 # How to merge two dicts
2 # in Python 3.5+
3
4 >>> x = {'a': 1, 'b': 2}
5 >>> y = {'b': 3, 'c': 4}
6
7 >>> z = {**x, **y}
8
9 >>> z
10 {'c': 4, 'a': 1, 'b': 3}
```

Improve Your Python

...with a fresh **Python Trick** code snippet every couple of days:

Email Address

[Send Python Tricks »](#)

Master Real-World Python Skills With Unlimited Access to Real Python



Join us and get access to hundreds of tutorials, hands-on video courses, and a community of expert

Pythonistas:

[Level Up Your Python Skills »](#)

What Do You Think?

Tweet Share Email

Real Python Comment Policy: The most useful comments are those written with the goal of learning from or helping out other readers—after reading the whole article and all the earlier comments. Complaints and insults generally won't make the cut here.

What's your #1 takeaway or favorite thing you learned? How are you going to put your newfound skills to use? Leave a comment below and let us know.

Keep Learning

Related Tutorial Categories: [data-science](#) [intermediate](#) [machine-learning](#)

— FREE Email Series —

Python Tricks

```
1# How to merge two dicts
2# in Python 3.5+
3
4>>> x = {'a': 1, 'b': 2}
5>>>
6
7>>>
8
9>>>
10{'c': 4, 'a': 1, 'b': 3}
```

Improve Your Python

...with a fresh  Python Trick  code snippet every couple of days:

Email Address

Email...

Send Python Tricks »

Get Python Tricks »

 No spam. Unsubscribe any time.

All Tutorial Topics

[advanced](#) [api](#) [basics](#) [best-practices](#) [community](#) [databases](#) [data-science](#)
[devops](#) [django](#) [docker](#) [flask](#) [front-end](#) [gui](#) [intermediate](#)
[machine-learning](#) [projects](#) [python](#) [te](#)

[Improve Your Python](#)

Find Your Dream Python Job

pythonjobshq.com



Table of Contents

- [Regression](#)
- [Linear Regression](#)
- [Implementing Linear Regression in Python](#)
- [Beyond Linear Regression](#)
- [Conclusion](#)

[MARK AS COMPLETED](#)



[Tweet](#) [Share](#) [Email](#)



Master Python 3 and write more Pythonic code with our in-depth [books](#) and [video courses](#):

[Get Python Books & Courses »](#)

© 2012–2021 Real Python · [About](#) · [Tutorials](#) · [Courses](#) · [Books](#) · [Events](#) · [Jobs](#) · [Discussions](#) · [Search](#)

```
1 # How to merge two dicts
2 # in Python 3.5+
3
4 >>> x = {'a': 1, 'b': 2}
5 >>> y = {'b': 3, 'c': 4}
6
7 >>> z = {**x, **y}
8
9 >>> z
10 {'c': 4, 'a': 1, 'b': 3}
```

Improve Your Python

...with a fresh [Python Trick](#) code snippet every couple of days:

[Send Python Tricks »](#)

[Improve Your Python](#)