
Cucumber Report




FEATURES SUMMARY -- 2 --

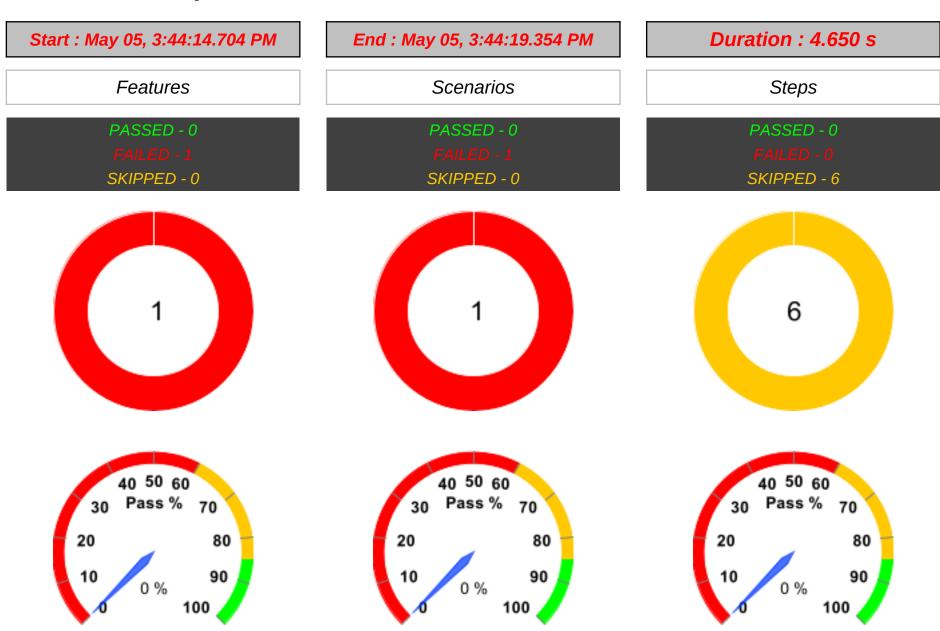

#	Feature Name	T	P	F	S	Duration
1	To destory the ChequeBook Record	1	0	1	0	4.650 s

SCENARIOS SUMMARY -- 3 --

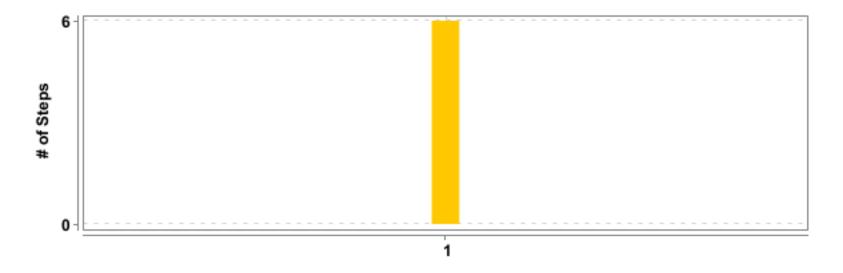


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	To destory the ChequeBook Record	destory the ChequeBook Record	6	0	0	6	4.643 s

DETAILED SECTION -- 4 --

(F)- To destory the ChequeBook Record

FAILED	DURATION - 4.650 s	Scenarios		Steps	
		Total - 1		Total - 6	
/ 3:44:14.704 PN	M // 3:44:19.354 PM /	Pass - 0	1	Pass - 0	6
		Fail - 1.		Fail - 0	
		Skip - 0		Skip - 6	

(S)- destory the ChequeBook Record

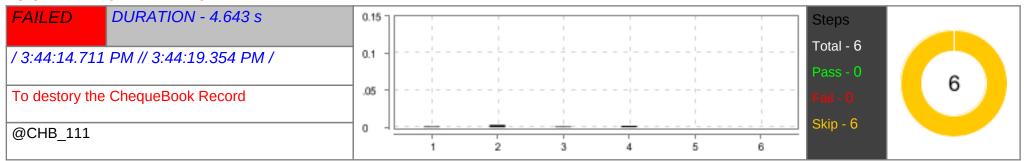

#	Step / Hook Details	Status	Duration
	BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario)		4.541 s
	java.lang.NullPointerException: Cannot invoke "String.equalsIgnoreCase(String)" because the return value of "java.util.Map.get(Object)" is null at stepdefinitions.HooksClass.browserSetup(HooksClass.java:41)		
1	Given navigate to CSM application and login with valid credentials	SKIPPED	0.001 s
2	And Click the ChequeBook request under CSM application	SKIPPED	0.003 s
3	Then Click the to be destory button under ChequeBook request	SKIPPED	0.001 s
4	And search a existing checkbook record	SKIPPED	0.002 s
5	Then double click the approve option	SKIPPED	0.000 s
6	And click the todestory button	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.001 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "this.driver" is null at stepdefinitions.HooksClass.TearDown(HooksClass.java:72)		