

Cucumber Report

22 May 2023, 4:47:31 PM

Start : May 22, 4:47:08.993 PM

End : May 22, 4:47:28.420 PM

Duration : 19.427 s

Features


Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0


PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 0
SKIPPED - 26

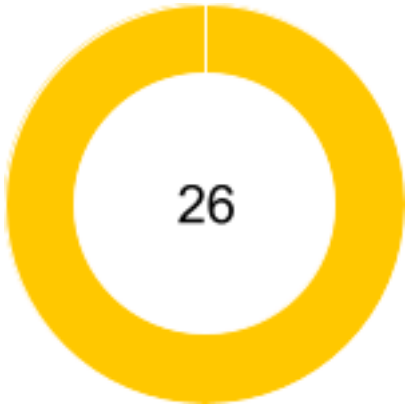



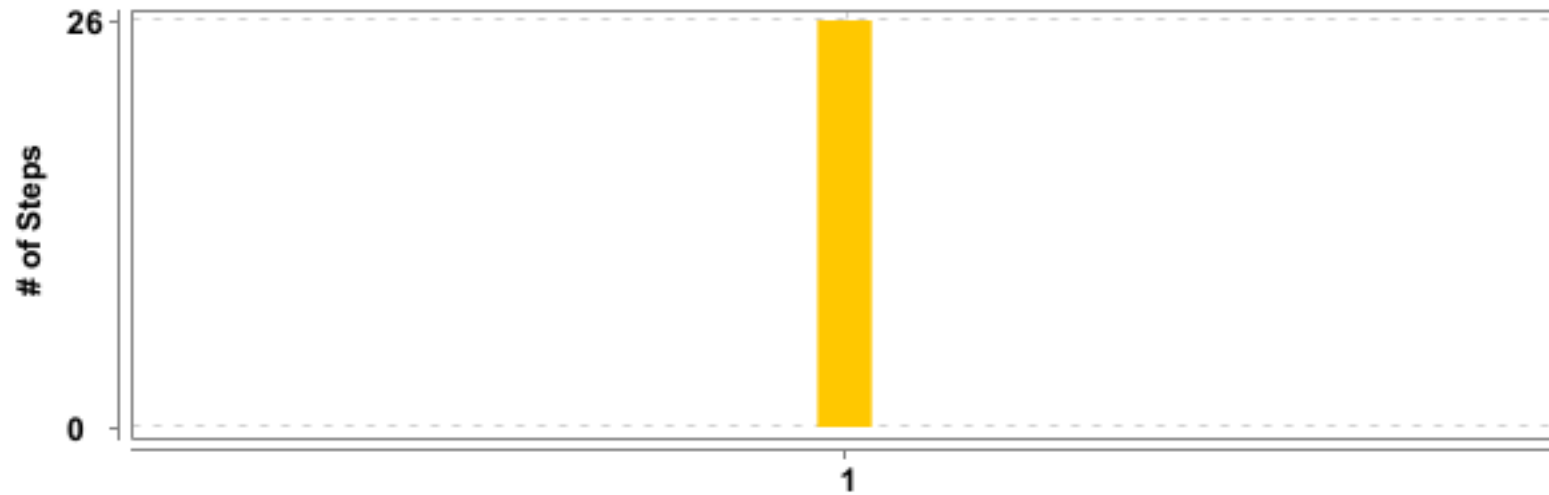

#	Feature Name	T	P	F	S	Duration
1	<u>To test the functionalities of Transaction module</u>	1	0	1	0	19.427 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>To test the functionalities of Transaction module</u>	<u>Checking Multi Transfer (Main Credit) Transaction - Booked Entries + Balance Updates - Allow Internal GL flag *</u>	26	0	0	26	19.422 s

* The feature name and/or scenario name has been cropped to fit in the available space.

(F)- To test the functionalities of Transaction module

FAILED	DURATION - 19.427 s	Scenarios		Steps	
/ 4:47:08.993 PM // 4:47:28.420 PM /		Total - 1		Total - 26	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 26	

(S)- Checking Multi Transfer (Main Credit) Transaction - Booked Entries + Balance Updates - Allow Internal GL flag unchecked
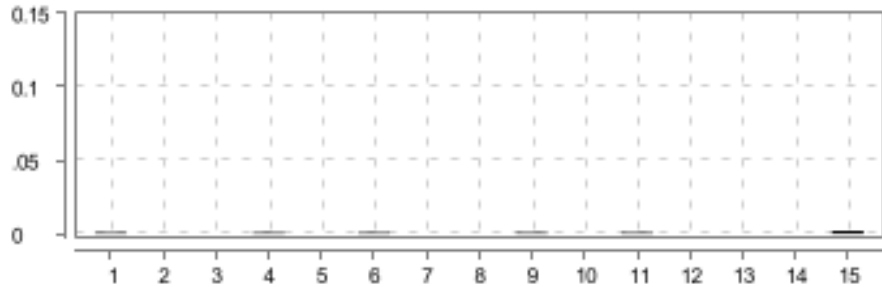
<div>FAILED</div> <div>DURATION - 19.422 s</div>			Steps	
/ 4:47:08.998 PM // 4:47:28.420 PM /			Total - 26	
To test the funcnalities of Transaction module			Pass - 0	
@TSA_023			Fail - 0	
			Skip - 26	

#	Step / Hook Details	Status	Duration
	BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario) org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: session not created from no such execution context: uniqueContextId not found (Session info: chrome=113.0.5672.127) Host info: host: 'DESKTOP-PSK9T3S', ip: '10.81.234.79' Build info: version: '4.8.1', revision: '8ebccac989' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [--remote-allow-origins=*], extensions: []}}, desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [--remote-allow-origins=*], extensions: []}}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:148) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:106) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:67) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:101)	FAILED	19.328 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:82) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:71) at resources.BaseClass.initializeDriver(BaseClass.java:29) at stepdefinitions.HooksClass.browserSetup(HooksClass.java:45)		
1	Given navigate to CSM param application and login with valid credentials	SKIPPED	0.001 s
2	And user click the parameters menu	SKIPPED	0.000 s
3	And user click the system parameters submenu	SKIPPED	0.000 s
4	And user click the transationtype submenu under systemparameters	SKIPPED	0.001 s
5	And user click the UPAA field under TransactionType	SKIPPED	0.000 s
6	And user Enter the code in UPAA field	SKIPPED	0.001 s
7	And user double click the code on UPAA field	SKIPPED	0.000 s
8	And user check the status of the AllowInternalGLAccount CheckBox	SKIPPED	0.000 s
9	And user click UpdateAfterApprove Button	SKIPPED	0.001 s
10	And user click the save ok button	SKIPPED	0.000 s
11	And user click the ok	SKIPPED	0.001 s
12	And user click Approve field under TransactionType	SKIPPED	0.000 s
13	And user Enter the code in Approve field	SKIPPED	0.000 s
14	And user double click the code on Approve field	SKIPPED	0.000 s
15	And user click Approve Button	SKIPPED	0.002 s
16	And user click the save ok button	SKIPPED	0.001 s
17	And user click the ok	SKIPPED	0.005 s
18	Given navigate to CSM application and login with valid credentials	SKIPPED	0.001 s
19	And user click Transaction submenu on CSMCore	SKIPPED	0.000 s
20	And user click Maintance screen under Transaction submenu	SKIPPED	0.000 s
21	And user Enter the TRXType on maintance screen	SKIPPED	0.001 s
22	And user Enter the BranchCode under TRXType	SKIPPED	0.001 s
23	And user Enter the CurrencyCode under TRXType	SKIPPED	0.000 s
24	And user Enter the GLCode under TRXType	SKIPPED	0.000 s
25	And user Enter the CifCode under TRXType	SKIPPED	0.000 s
26	And user Enter the SerialNo under TRXType	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "this.driver" is null at stepdefinitions.HooksClass.TearDown(HooksClass.java:72)		