Cucumber Report

Start : May 08, 12:45:14.007 PM	End : May 08, 12:46:08.231 PM	Duration : 54.224 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 1 FAILED - 1 SKIPPED - 4
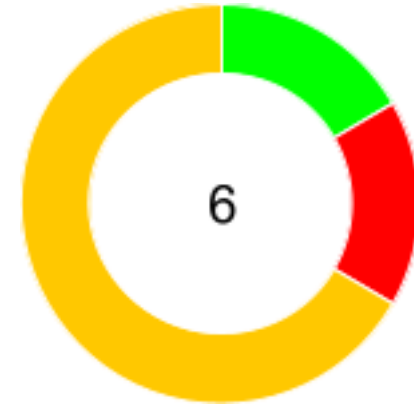
#	Feature Name	T	P	F	S	Duration
1	To destory the ChequeBook Record	1	0	1	0	54.224 s
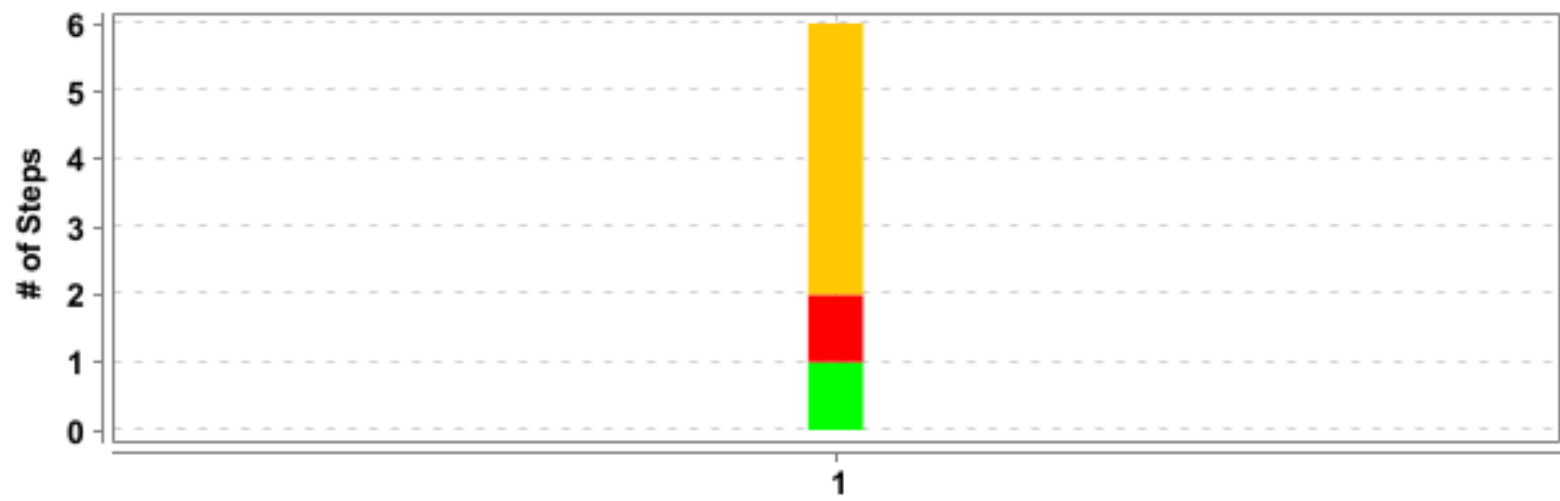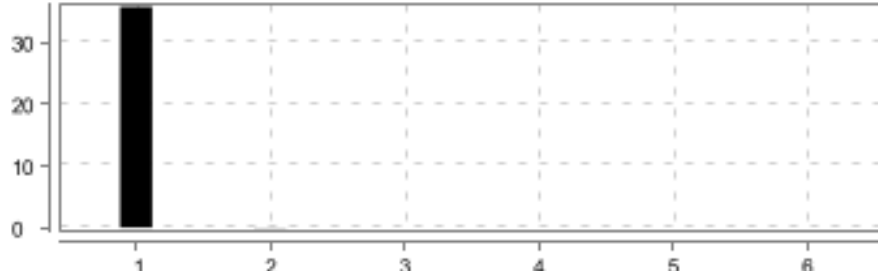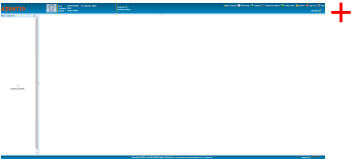
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	To destory the ChequeBook Record	destory the ChequeBook Record	6	1	1	4	54.214 s
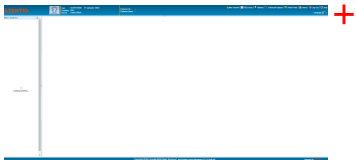
(F)- To destory the ChequeBook Record

FAILED	DURATION - 54.224 s	Scenarios	Steps
		Total - 1	Total - 6
/ 12:45:14.007 PM // 12:46:08.231 PM /		Pass - 0	Pass - 1
		Fail - 1	Fail - 1
		Skip - 0	Skip - 4

(S)- destory the ChequeBook Record

FAILED	DURATION - 54.214 s		Steps
			Total - 6
/ 12:45:14.017 PM // 12:46:08.231 PM /			Pass - 1
To destory the ChequeBook Record			Fail - 1
@CHB_111			Skip - 4

#	Step / Hook Details	Status	Duration
1	Given navigate to CSM application and login with valid credentials	PASSED	35.759 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.539 s
	screenshot		
2	And Click the ChequeBook request under CSM application	FAILED	0.077 s
	org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//td[text()='Chequebook Request']"} (Session info: chrome=112.0.5615.138) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.8.1', revision: '8ebccac989' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [9a0333971571cf1ea0b7a9ce1c898ff1, findElement {using=xpath, value=//td[text()='Chequebook Request']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 112.0.5615.138, chrome: {chromedriverVersion: 112.0.5615.49 (bd2a7bcb881c..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:64008}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:64008/devtoo..., se:cdpVersion: 112.0.5615.138, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss		

#	Step / Hook Details	Status	Duration

	and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 9a0333971571cf1ea0b7a9ce1c898ff1
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	    at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	    at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	    at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70)
	    at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39)
	    at jdk.proxy2/jdk.proxy2.$Proxy45.click(Unknown Source)
	    at stepdefinitions.CSM_CB_DestroytheRecord_steps.click_the_chequebook_request_under_csm_application(CSM_CB_DestroytheRecord_steps.java:37)
	    at ?.Click the ChequeBook request under CSM application(file:///C:/Users/inindc00605/eclipse-workspace/Azentio_CSM_Gowtham/src/test/java/features/CSM_CB_DestroytheRecord.feature:7)
	* Not displayable characters are replaced by '?'.		

	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.689 s
3	Then Click the to be destory button under ChequeBook request	SKIPPED	0.000 s
4	And search a existing checkbook record	SKIPPED	0.000 s
5	Then double click the approve option	SKIPPED	0.000 s
6	And click the todestory button	SKIPPED	0.000 s

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) destory the ChequeBook Record	
(F) To destory the ChequeBook Record	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) destory the ChequeBook Record	
(F) To destory the ChequeBook Record	