


FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	To check the functionality of chequebook Request	1	0	1	0	13.866 s

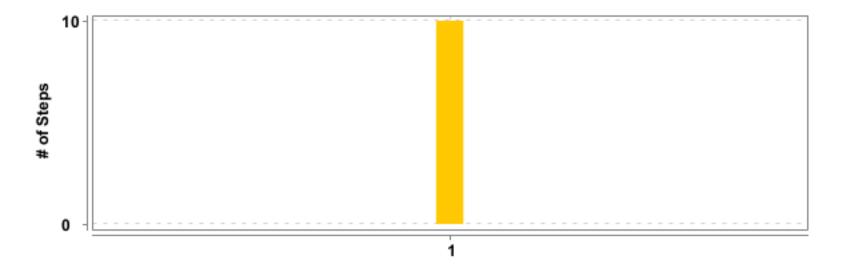


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	To check the functionality of	Checking if the user is able to select any row and click	10	0	0	10	13.857 s
	chequebook Request	"Destroy" under Approve/Reject Destroy					

DETAILED SECTION -- 4 --

## (F)- To check the functionality of chequebook Request

FAILED	DURATION - 13.866 s	Scenarios		Steps			
		Total - 1		Total - 10			
/ 1:32:13.668 PN	M // 1:32:27.534 PM /	Pass - 0	1	Pass - 0	10		
		Fail - 1		Fail - 0			
		Skip - 0		Skip - 10			

## (S)- Checking if the user is able to select any row and click "Destroy" under Approve/Reject Destroy

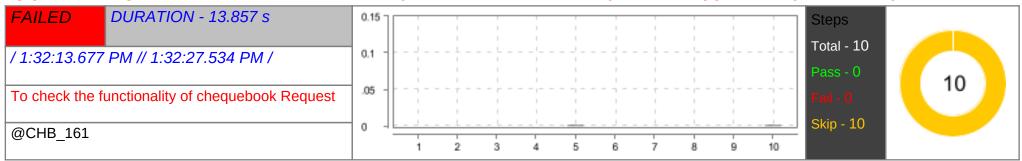

Step / Hook Details	Status	Duration
BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario)	FAILED	13.803 s
org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: session not created from no such execution context: loader has changed while resolving nodes (Session info: chrome=113.0.5672.92) Host info: host: 'DESKTOP-PSK9T3J', ip: '10.81.234.51' Build info: version: '4.8.1', revision: '8ebccac989' System info: os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession (capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}}, desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}} at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:148) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:106) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:156) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:2543) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:157)	FAILED	13.803 s
at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:82)</init>		
	BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario)  org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: session not created from no such execution context: loader has changed while resolving nodes (Session info: chrome=113.0.5672.92) Host info: host: 'DESKTOP-PSK9T37, ip: '10.81.234.51' Build info: version: '4.8.1', revision: '8ebccac989' System info: os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession (capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}, desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}} at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:148) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:106) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:156) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.cexecute(RemoteWebDriver.java:299) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:157) at org.openqa.selenium.remote.RemoteWebDriver.	BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario)  org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: session not created from no such execution context: loader has changed while resolving nodes (Session info: chrome=113.0.5672.92) Host info: host: 'DESKTOP-PSK9T3J', ip: '10.81.234.51' Build info: version: '4.8.1', revision: '8ebccac989' System info: os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '16.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession (capabilities (prowserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}}, desiredCapabilities (prowserName: chrome, goog:chromeOptions: {args: [remote-allow-origins=*], extensions: []}}}} at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:148) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:106) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:156) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.RemoteWebDriver.execute(EvercommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:229) at org.openqa.selenium.remote.RemoteWebDriver. at org.openqa.selenium.remote.RemoteWebDriver.sinit>(RemoteWebDriver.java:157) at org.openqa.selenium.chromium.ChromiumDriver. at org.openqa.selenium.chromium.ChromiumDriver. cinit>(ChromiumDriver.java:101) at org.openqa.selenium.chrome.ChromeDriver.

DETAILED SECTION -- 5 --

#	Step / Hook Details	Status	Duration
	at resources.BaseClass.initializeDriver(BaseClass.java:29) at stepdefinitions.HooksClass.browserSetup(HooksClass.java:45)		
1	Given navigate to CSM application and login with valid credentials	SKIPPED	0.000 s
2	And Click the Chequebook Request flag	SKIPPED	0.000 s
3	And Click the Bulk Destroy under Chequebook Request	SKIPPED	0.000 s
4	Then Click the retrieve button under Bulk Destroy	SKIPPED	0.000 s
5	And Choose the existing record under Bulk Destroy	SKIPPED	0.001 s
6	Then Destroy the record by clicking To Destroy button under Bulk Destroy	SKIPPED	0.000 s
7	And Navigate to Approve/Reject Bulk Destroy	SKIPPED	0.000 s
8	Then Click the retrieve button under Approve/Reject Bulk Destroy	SKIPPED	0.000 s
9	And Click the search icon under Approve/Reject Bulk Destroy	SKIPPED	0.000 s
10	Then Click the Search Box under Approve/Reject Bulk Destroy	SKIPPED	0.001 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "this.driver" is null at stepdefinitions.HooksClass.TearDown(HooksClass.java:72)		