Cucumber Report

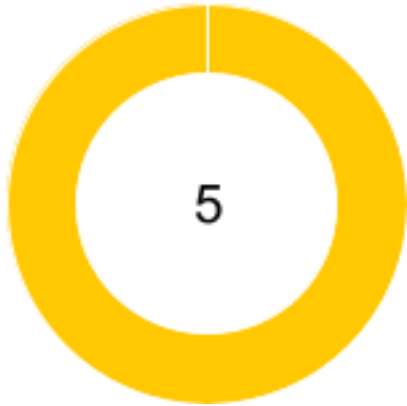| Start : Jun 30, 4:10:28.640 pm	End : Jun 30, 4:10:40.373 pm	Duration : 11.733 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 0 SKIPPED - 5

#	Feature Name	T	P	F	S	Duration
1	Title of your feature	1	0	1	0	11.733 s
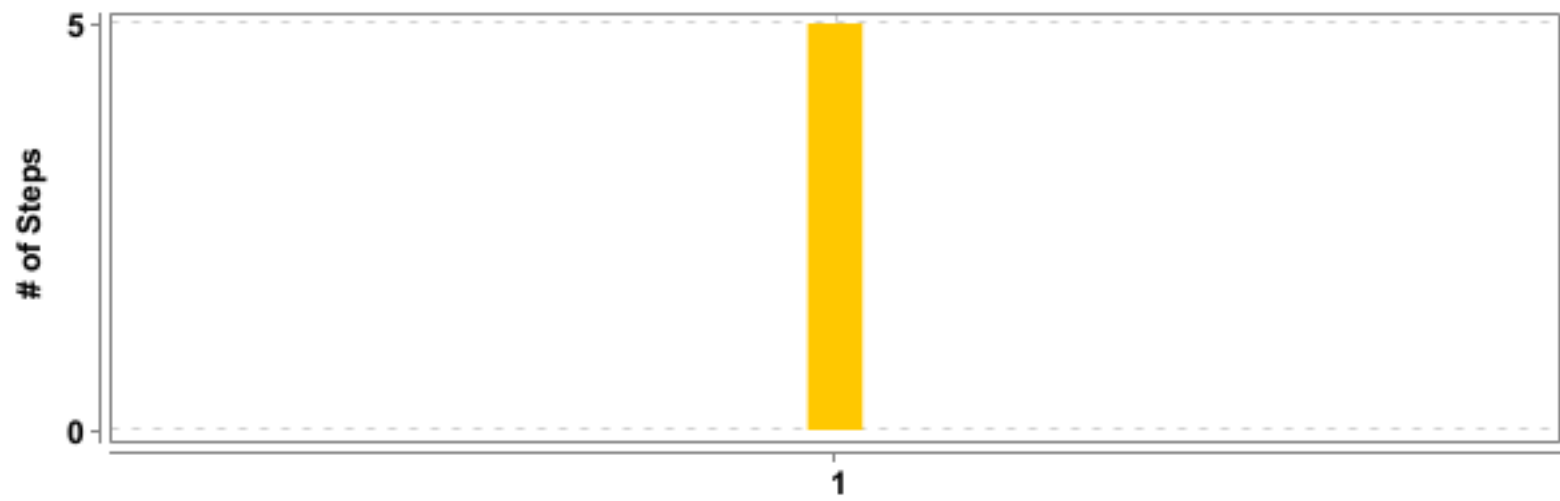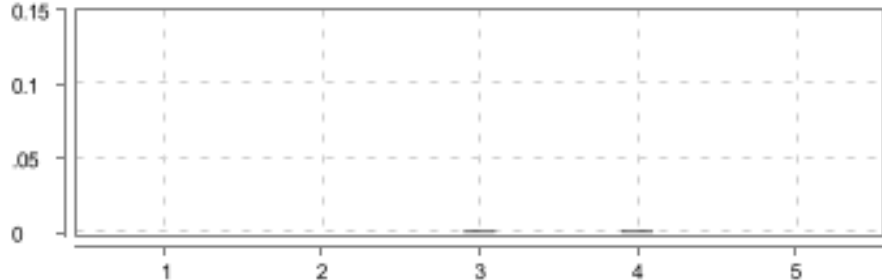
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Title of your feature	5. Check that user cannot able to enter the duplicate value in code field	5	0	0	5	11.727 s

(F)- Title of your feature

FAILED	DURATION - 11.733 s		Scenarios		Steps	
/ 4:10:28.640 pm // 4:10:40.373 pm /			Total - 1		Total - 5	
			Pass - 0	**1**	Pass - 0	**5**
			Fail - 1		Fail - 0	
			Skip - 0		Skip - 5	

(S)- 5. Check that user cannot able to enter the duplicate value in code field

FAILED	DURATION - 11.727 s		Steps	
/ 4:10:28.646 pm // 4:10:40.373 pm /			Total - 5	
Title of your feature			Pass - 0	**5**
@tag @586449			Fail - 0	
			Skip - 5	

#	Step / Hook Details	Status	Duration
	BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario)	FAILED	11.671 s

	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: session not created from no such execution context: uniqueContextId not found (Session info: chrome=114.0.5735.199) Host info: host: 'DESKTOP-PSK9T3A', ip: '10.81.234.9' Build info: version: '4.8.1', revision: '8ebccac989' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.7' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [--remote-allow-origins=*, --incognito], extensions: []}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [--remote-allow-origins=*, --incognito], extensions: []}}}]
	    at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:148)
	    at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:106)
	    at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:67)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	    at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:229)
	    at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:157)
	    at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:101)
	    at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:82)
	    at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:71)		

#	Step / Hook Details	Status	Duration
	at resources.BaseClass.initializeDriver(BaseClass.java:30) at stepdefinitions.HooksClass.browserSetup(HooksClass.java:43)		
1	Given navigate to FMS param application and login with valid credentials	SKIPPED	0.000 s
2	And Click on the Parameters menu	SKIPPED	0.000 s
3	And User_607 Click Financial Indicators under Parameters	SKIPPED	0.001 s
4	And User_607 Click Mainteance Under Financial Indicators	SKIPPED	0.001 s
5	And User_607 Check duplicate Code not allow In Mainteance Under Financial Indicators	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.001 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "this.driver" is null at stepdefinitions.HooksClass.TearDown(HooksClass.java:63)		