Cucumber Report

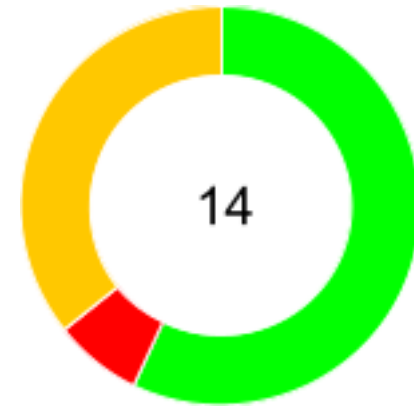| *Start : Sep 28, 3:13:44.687 PM*	*End : Sep 28, 3:15:39.669 PM*	*Duration : 1 m 54.982 s*
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 8 FAILED - 1 SKIPPED - 5

#	Feature Name	T	P	F	S	Duration
1	To Test the FMSiis application	1	0	1	0	1 m 54.982 s
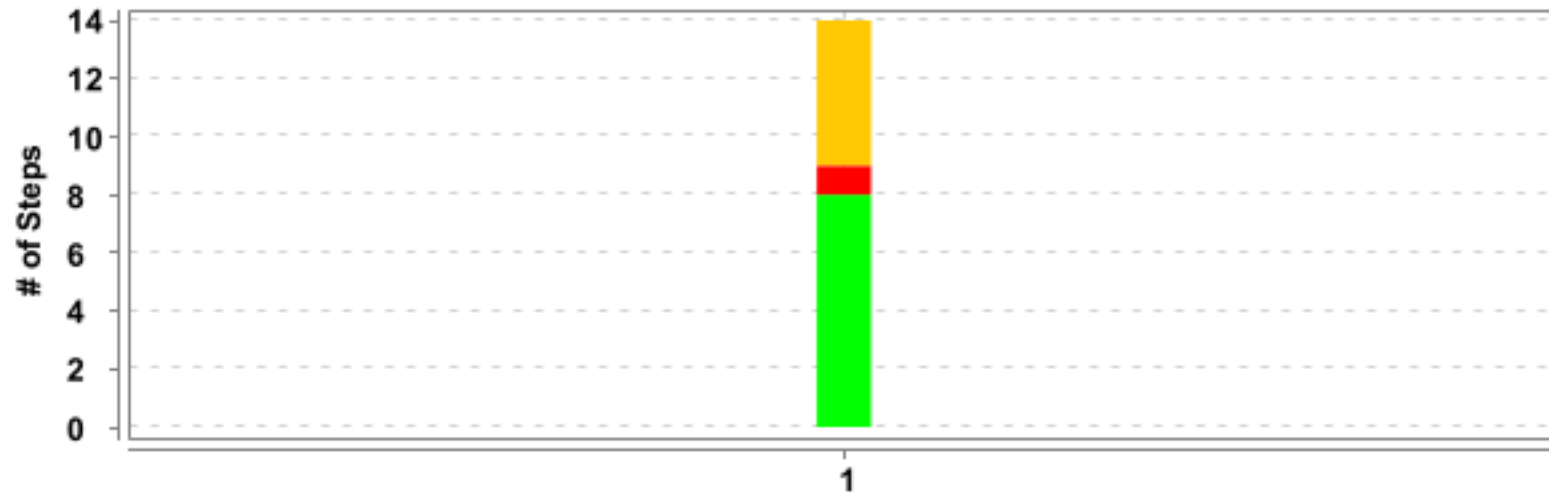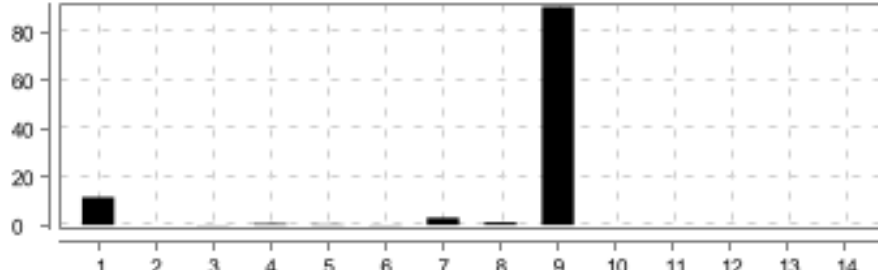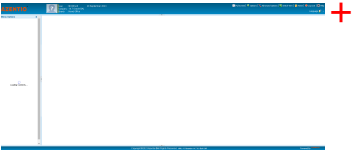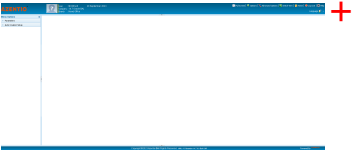
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	To Test the FMSiis application	Check basic functionality of Reason code module	14	8	1	5	1 m 54.979 s

(F)- To Test the FMSiis application

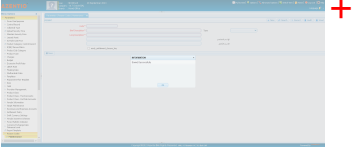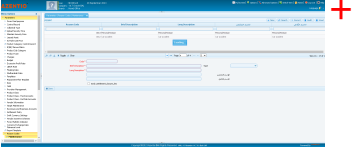| FAILED	DURATION - 1 m 54.982 s		Scenarios		Steps	
/ 3:13:44.687 PM // 3:15:39.669 PM /			Total - 1 Pass - 0 Fail - 1 Skip - 0	1	Total - 14 Pass - 8 Fail - 1 Skip - 5	14

(S)- Check basic functionality of Reason code module
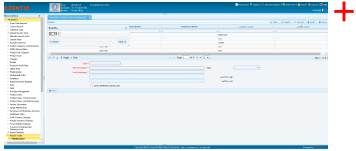
FAILED	DURATION - 1 m 54.979 s		Steps	
/ 3:13:44.690 PM // 3:15:39.669 PM /			Total - 14 Pass - 8 Fail - 1 Skip - 5	14
To Test the FMSiis application				
@AT_IISPRM_57				

#	Step / Hook Details	Status	Duration
1	Given user_57 navigate to the IISParam application and login with the valid credentials	PASSED	11.433 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.325 s
	screenshot		
	+		
2	Then user_57 update test data set id for AT_iisprm_058	PASSED	0.003 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.166 s
	screenshot		
	+		

#	Step / Hook Details	Status	Duration
3	And user_57 click on parameters tab	PASSED	0.093 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.175 s
	screenshot		
	+		
4	And user_57 click on Reason code	PASSED	0.505 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.310 s
	screenshot		
	+		
5	And user_57 check menus and lists are available	PASSED	0.318 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.240 s
	screenshot		
	+		
6	And user_57 click on maintenance and create a record	PASSED	0.145 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	1.422 s
	screenshot		
	+		
7	And user_57 enter code brief description long description and save it	PASSED	2.979 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.180 s
	screenshot		

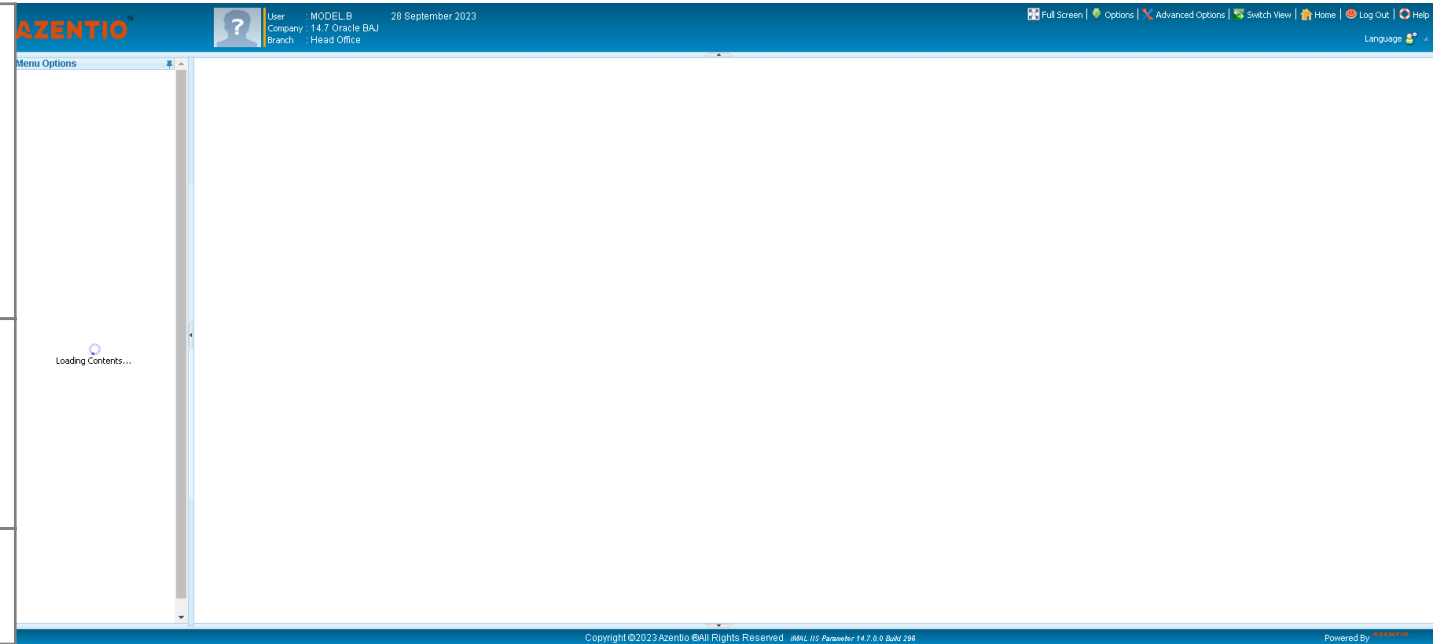| #	Step / Hook Details	Status	Duration
	+		
8	And user_57 check first last prev next button	PASSED	1.135 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.186 s
	screenshot		
	+		
9	And user_57 check sorting functionality	FAILED	1 m 30.303 s

	org.openqa.selenium.TimeoutException: Expected condition failed: waiting for visibility of Proxy element for: DefaultElementLocator 'By.xpath: //*[@id="fbox_leasedAssetListGridTbl_Id_M07MT"]/table/tbody/tr[2]/th/input' (tried for 60 second(s) with 5 milliseconds interval)
	    at org.openqa.selenium.support.ui.FluentWait.timeoutException(FluentWait.java:262)
	    at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:230)
	    at helper.WaitHelper.waitForElementwithFluentwait(WaitHelper.java:95)
	    at stepdefinitions.Reason_codes_057.user_57_check_sorting_functionality(Reason_codes_057.java:176)
	    at ?.user_57 check sorting functionality(file:///C:/Users/ININDC00629/git/AZENTIO-FMS1/AzentioAutomationFramework_FMS_Ajith/src/test/java/features_IIS/AT_IISPRM_057.feature:12)
	Caused by: org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//*[@id="fbox_leasedAssetListGridTbl_Id_M07MT"]/table/tbody/tr[2]/th/input"} (Session info: chrome=117.0.5938.92) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [44b0b670cedcb0b537b9ed7a8c58c9ad, findElement {using=xpath, value=//*[@id="fbox_leasedAssetListGridTbl_Id_M07MT"]/table/tbody/tr[2]/th/input}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.92, chrome: {chromedriverVersion: 117.0.5938.92 (67649b10b92b..., userDataDir: C:\Users\ININDC~1\AppData\L...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:62624}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:62624/devtoo..., se:cdpVersion: 117.0.5938.92, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 44b0b670cedcb0b537b9ed7a8c58c9ad
	    at jdk.internal.reflect.GeneratedConstructorAccessor45.newInstance(Unknown Source)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)		
	at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:165)		
	at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349)		
	at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68)		
	at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38)		
	at jdk.proxy2/jdk.proxy2.$Proxy46.isDisplayed(Unknown Source)		
	at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:304)		
	at org.openqa.selenium.support.ui.ExpectedConditions.access$000(ExpectedConditions.java:37)		
	at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:290)		
	at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:287)		
	at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:205)		
	at helper.WaitHelper.waitForElementwithFluentwait(WaitHelper.java:95)		
	at stepdefinitions.Reason_codes_057.user_57_check_sorting_functionality(Reason_codes_057.java:176)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:568)		
	at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:64)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:104)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:71)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda$runScenario$0(TestNGCucumberRunner.java:116)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:117)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:113)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:31)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		

#	Step / Hook Details	Status	Duration
	at java.base/java.lang.reflect.Method.invoke(Method.java:568)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:664)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:227)		
	at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50)		
	at org.testng.internal.invokers.TestInvoker$MethodInvocationAgent.invoke(TestInvoker.java:957)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:200)		
	at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148)		
	at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128)		
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1511)		
	at org.testng.TestRunner.privateRun(TestRunner.java:848)		
	at org.testng.TestRunner.run(TestRunner.java:621)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:443)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:437)		
	at org.testng.SuiteRunner.privateRun(SuiteRunner.java:397)		
	at org.testng.SuiteRunner.run(SuiteRunner.java:336)		
	at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)		
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1280)		
	at org.testng.TestNG.runSuitesLocally(TestNG.java:1200)		
	at org.testng.TestNG.runSuites(TestNG.java:1114)		
	at org.testng.TestNG.run(TestNG.java:1082)		
	at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115)		
	at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251)		
	at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77)		
	* Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.170 s
	screenshot		
	+		
10	And user_57 search the code to check searching is working	SKIPPED	0.000 s
11	And user_57 check grid is listing all relevant data	SKIPPED	0.000 s
12	And user_57 enter additional details and update it	SKIPPED	0.000 s
13	And user_57 retrieve the code and delete it	SKIPPED	0.000 s
14	And user_57 close the screen	SKIPPED	0.000 s

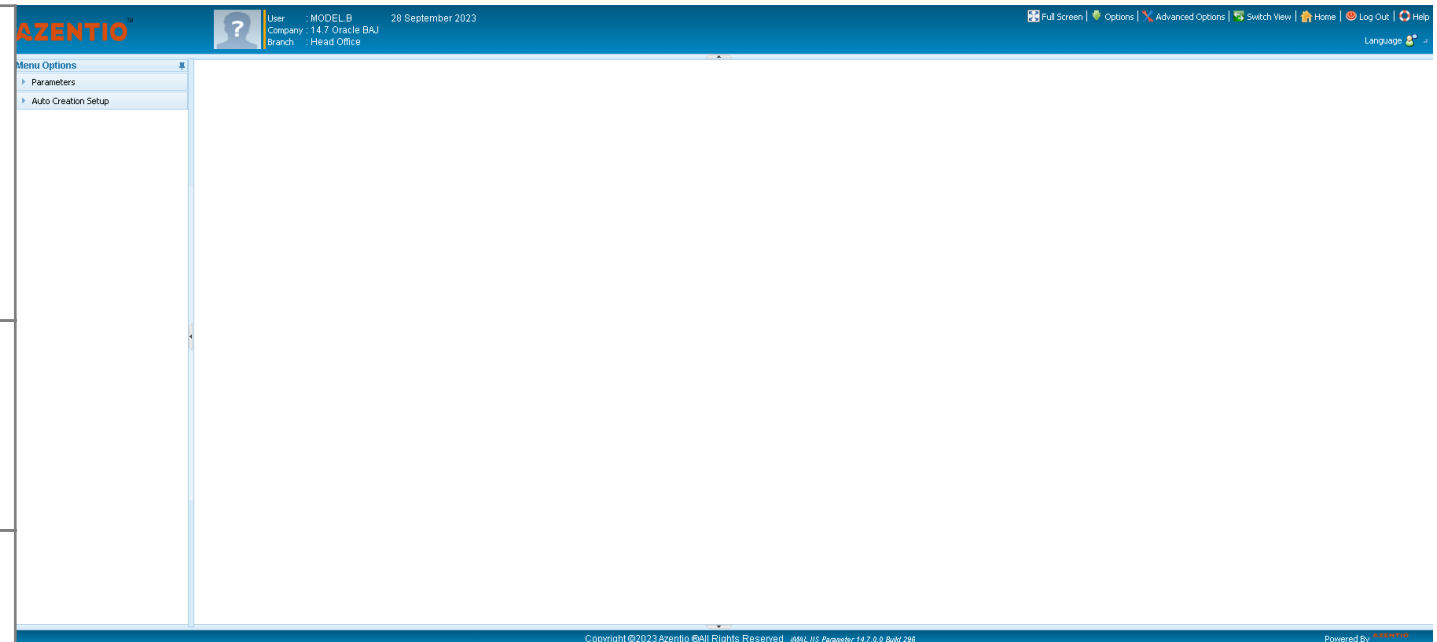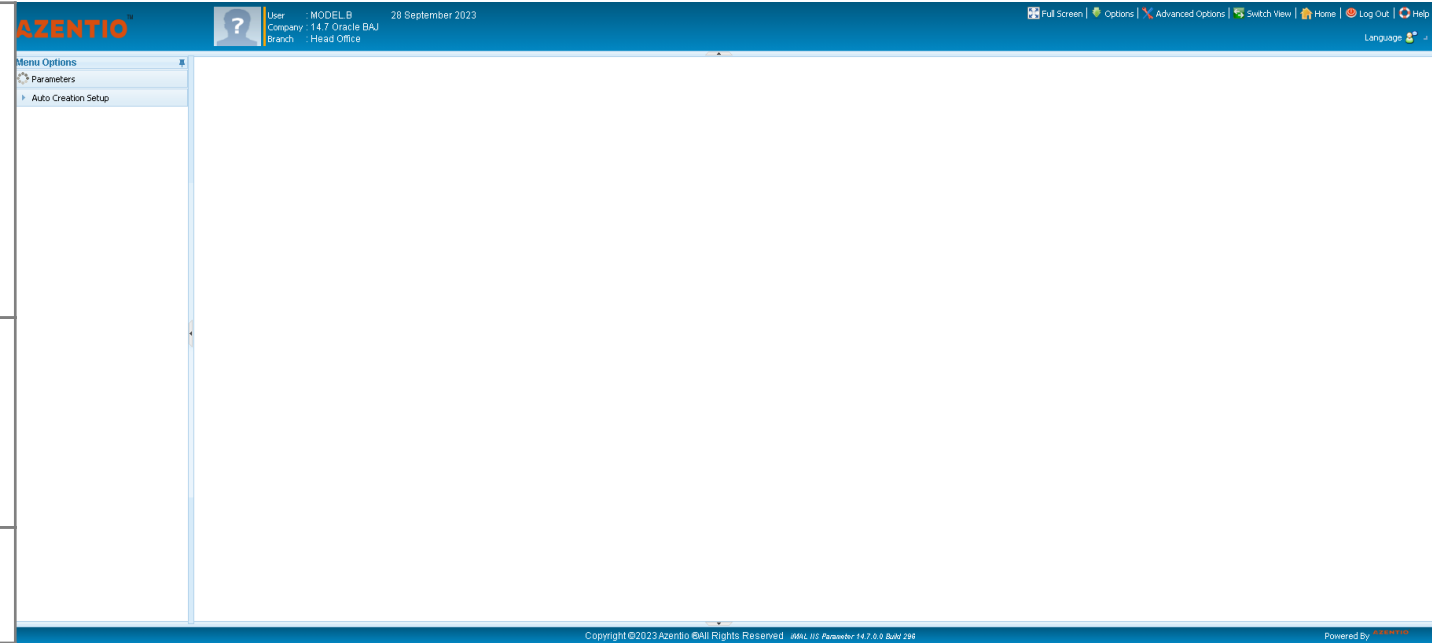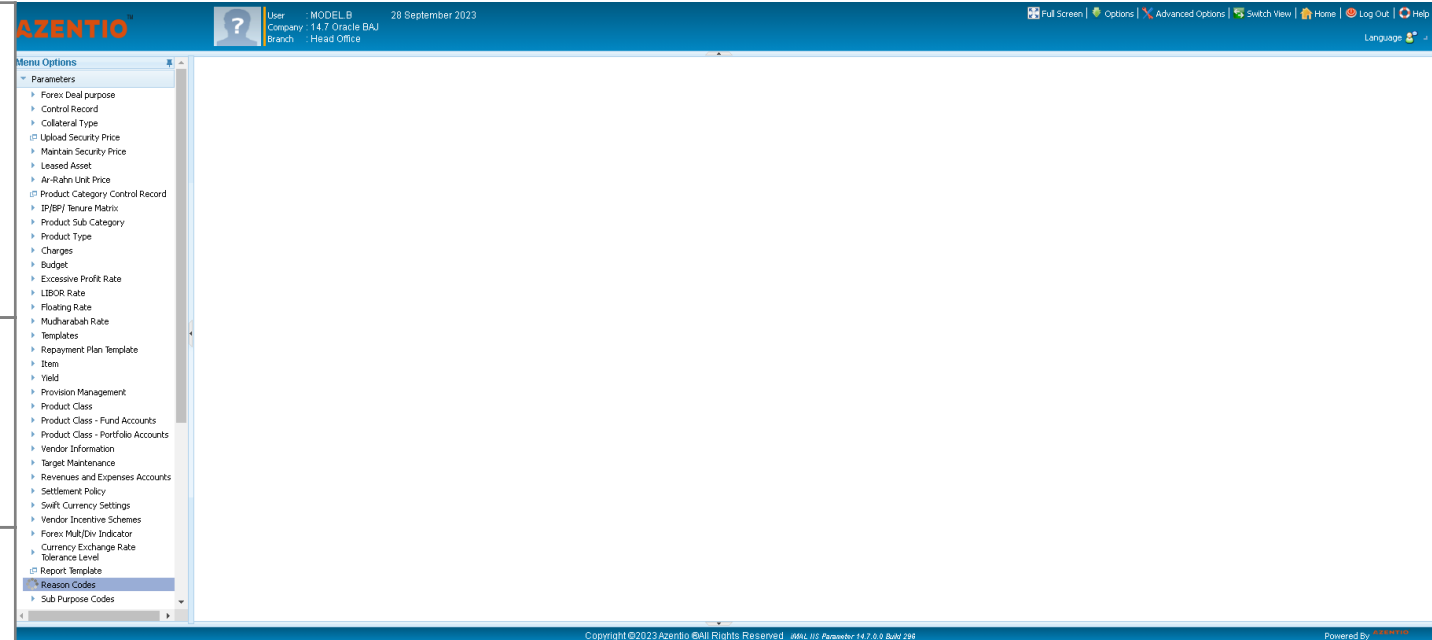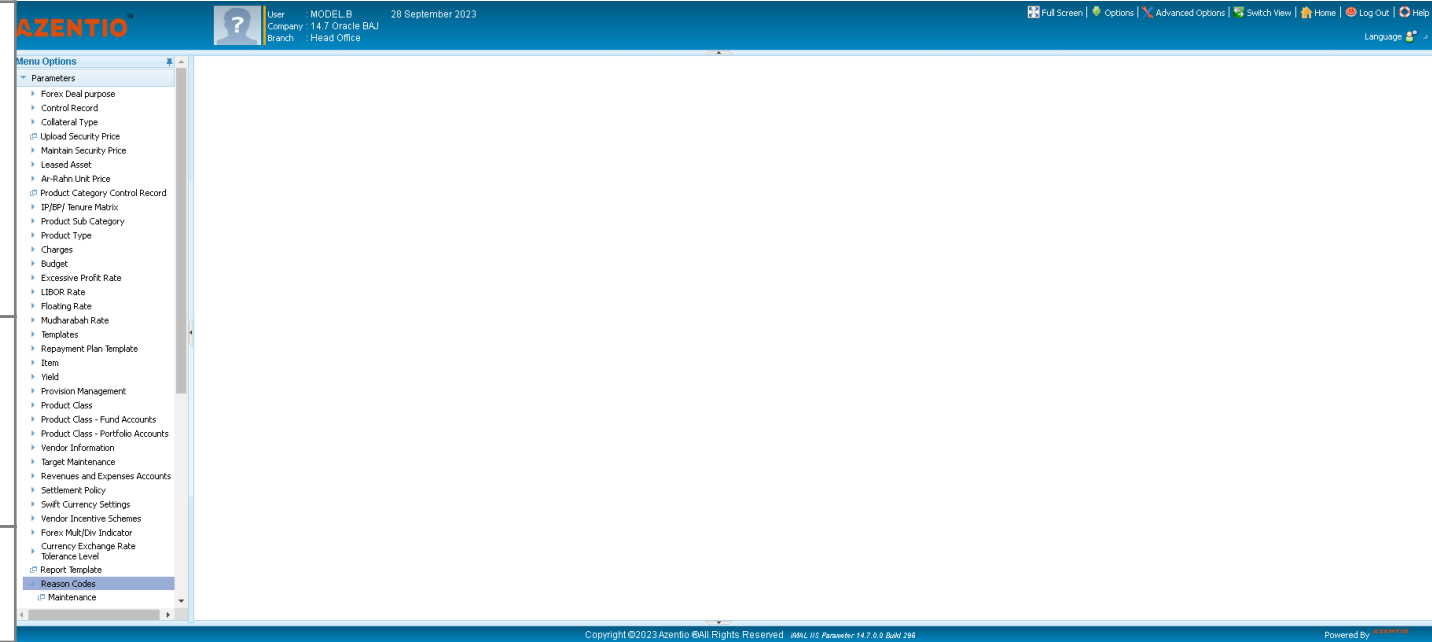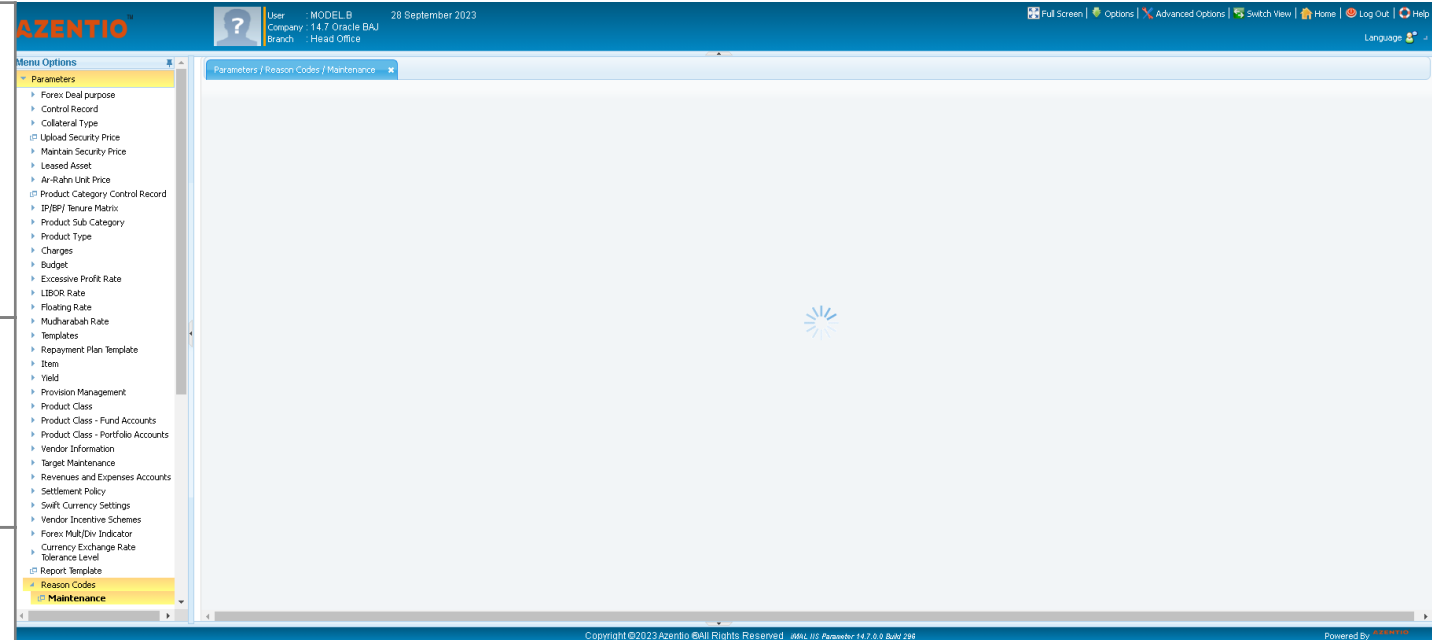| (Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario) |
|---|
| (S) Check basic functionality of Reason code module |
| (F) To Test the FMSiis application |

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)
(S) Check basic functionality of Reason code module
(F) To Test the FMSiis application

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Check basic functionality of Reason code module	
(F) To Test the FMSiis application	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Check basic functionality of Reason code module	
(F) To Test the FMSiis application	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Check basic functionality of Reason code module	
(F) To Test the FMSiis application	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Check basic functionality of Reason code module	
(F) To Test the FMSiis application	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Check basic functionality of Reason code module	
(F) To Test the FMSiis application	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Check basic functionality of Reason code module	
(F) To Test the FMSiis application	

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Check basic functionality of Reason code module

(F) To Test the FMSiis application