Cucumber Report

Start : Aug 22, 5:30:24.546 pm	End : Aug 22, 5:31:48.603 pm	Duration : 1 m 24.057 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 12

Features: 1

Scenarios: 1

Steps: 13

Pass %

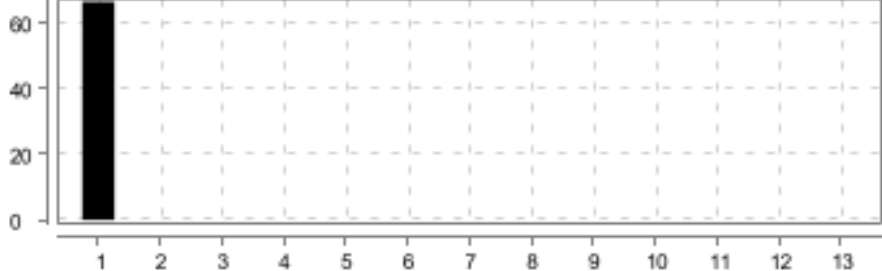| #	Feature Name	T	P	F	S	Duration
1	Asset Management	1	0	1	0	1 m 24.057 s
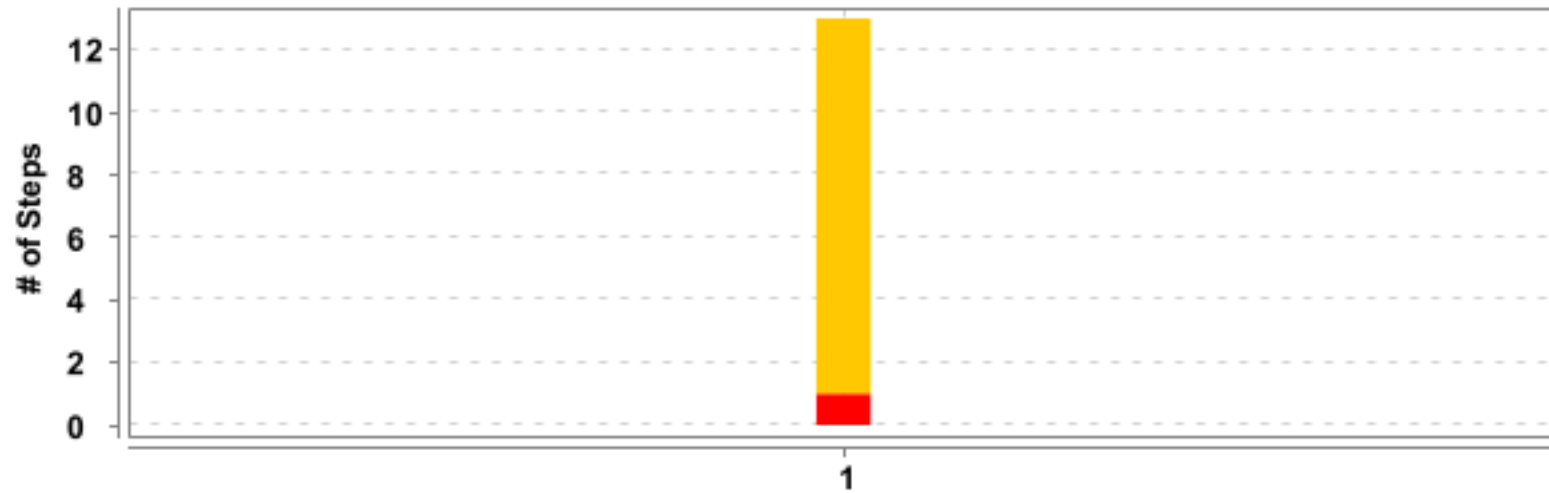
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Asset Management	Check the existing asset repossession screen is renamed to "Asset Management Finalization and is available under the *	13	0	1	12	1 m 24.050 s

(F)- Asset Management

FAILED	DURATION - 1 m 24.057 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0	1	Steps Total - 13 Pass - 0 Fail - 1 Skip - 12	13
/ 5:30:24.546 pm // 5:31:48.603 pm /					

(S)- Check the existing asset repossession screen is renamed to "Asset Management Finalization and is available under the Asset Management screen with sub menu options like Maintenance, verify, approve, query and reverse

FAILED	DURATION - 1 m 24.050 s		Steps Total - 13 Pass - 0 Fail - 1 Skip - 12	13
/ 5:30:24.553 pm // 5:31:48.603 pm /				
Asset Management				
@1080829				

#	Step / Hook Details	Status	Duration
1	Given navigate to IIS application and login with valid credentials	FAILED	1 m 6.477 s

	org.openqa.selenium.TimeoutException: Expected condition failed: waiting for visibility of Proxy element for: DefaultElementLocator 'By.id: j_username' (tried for 60 second(s) with 5 milliseconds interval)
	    at org.openqa.selenium.support.ui.FluentWait.timeoutException(FluentWait.java:262)
	    at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:230)
	    at helper.WaitHelper.waitForElementwithFluentwait(WaitHelper.java:95)
	    at stepdefinitions.IIS_Login.loginIntoIISApplication(IIS_Login.java:30)
	    at stepdefinitions.LoginTest.navigate_to_iis_application_and_login_with_valid_credentials(LoginTest.java:68)
	    at ?.navigate to IIS application and login with valid credentials(file:///C:/Users/inindc00607/git/AZENTIO-FMS_10/Azentio_FMS_Gowtham/ src/test/java/features/Asset_Management.feature:60)
	Caused by: org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"css selector","selector":"#j_username"} (Session info: chrome=116.0.5845.97) For documentation on this error, please visit: https://www.selenium. dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [1c165e3e26817be26b623afbc613c2a6, findElement {using=id, value=j_username}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 116.0.5845.97, chrome: {chromedriverVersion: 116.0.5845.96 (1a3918166880..., userDataDir:		

#	Step / Hook Details	Status	Duration

	C:\Users\ININDC~1\AppData\L...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53334}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:53334/devtoo..., se:cdpVersion: 116.0.5845.97, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 1c165e3e26817be26b623afbc613c2a6
	  at jdk.internal.reflect.GeneratedConstructorAccessor40.newInstance(Unknown Source)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518)
	  at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:165)
	  at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:355)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:349)
	  at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68)
	  at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38)
	  at jdk.proxy2/jdk.proxy2.$Proxy46.isDisplayed(Unknown Source)
	  at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:304)
	  at org.openqa.selenium.support.ui.ExpectedConditions.access$000(ExpectedConditions.java:37)
	  at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:290)
	  at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:287)
	  at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:205)
	  at helper.WaitHelper.waitForElementwithFluentwait(WaitHelper.java:95)
	  at stepdefinitions.IIS_Login.loginIntoIISApplication(IIS_Login.java:30)
	  at stepdefinitions.LoginTest.navigate_to_iis_application_and_login_with_valid_credentials(LoginTest.java:68)
	  at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
	  at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)
	  at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
	  at java.base/java.lang.reflect.Method.invoke(Method.java:568)
	  at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)
	  at io.cucumber.java.Invoker.invoke(Invoker.java:24)
	  at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)
	  at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)
	  at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)
	  at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)
	  at io.cucumber.core.runner.ExecutionMode$1.execute(ExecutionMode.java:10)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:64)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:104)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:71)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda$runScenario$0(TestNGCucumberRunner.java:116)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:117)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:113)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:31)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:568)		
	at org.testng.internal.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:133)		
	at org.testng.internal.TestInvoker.invokeMethod(TestInvoker.java:598)		
	at org.testng.internal.TestInvoker.invokeTestMethod(TestInvoker.java:173)		
	at org.testng.internal.MethodRunner.runInSequence(MethodRunner.java:46)		
	at org.testng.internal.TestInvoker$MethodInvocationAgent.invoke(TestInvoker.java:824)		
	at org.testng.internal.TestInvoker.invokeTestMethods(TestInvoker.java:146)		
	at org.testng.internal.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:146)		
	at org.testng.internal.TestMethodWorker.run(TestMethodWorker.java:128)		
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1511)		
	at org.testng.TestRunner.privateRun(TestRunner.java:794)		
	at org.testng.TestRunner.run(TestRunner.java:596)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:377)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:371)		
	at org.testng.SuiteRunner.privateRun(SuiteRunner.java:332)		
	at org.testng.SuiteRunner.run(SuiteRunner.java:276)		
	at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:53)		
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:96)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1212)		
	at org.testng.TestNG.runSuitesLocally(TestNG.java:1134)		
	at org.testng.TestNG.runSuites(TestNG.java:1063)		
	at org.testng.TestNG.run(TestNG.java:1031)		
	at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115)		
	at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251)		
	at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77)		
	* Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.269 s
	screenshot		

#	Step / Hook Details	Status	Duration
	Error 503—Service Unavailable **From RFC 2616 Hypertext Transfer Protocol -- HTTP/1.1** **10.5.4 503 Service Unavailable** The server is currently unable to handle the request due to a temporary overloading or maintenance of the server. The implication is that this is a temporary condition which will be alleviated after some time delay. If known, the length of the delay may be indicated in a Retry-After header. If no Retry-After is given, the client SHOULD handle the response as it would for a 500 response. Note: The existence of the 503 status code does not imply that a server must use it when becoming overloaded. Some servers may wish to simply refuse the connection.		
2	And User_607 Click Asset Management under Menu Options	SKIPPED	0.000 s
3	And User_607 Click Asset Management Finalization under Asset Management	SKIPPED	0.000 s
4	And User_607 Click Mainteance Under Asset Management Finalization	SKIPPED	0.000 s
5	And User_607 Check the new values are available in Repossession Type under field Asset Management Finalization	SKIPPED	0.000 s
6	And User_607 Click Query Under Asset Management Finalization	SKIPPED	0.000 s
7	And User_607 Check Query Screen open without any Error under Asset Management Finalization	SKIPPED	0.000 s
8	And User_607 Click Verify Under Asset Management Finalization	SKIPPED	0.000 s
9	And User_607 Check Verify Screen open without any Error under Asset Management Finalization	SKIPPED	0.000 s
10	And User_607 Click Approve Under Asset Management Finalization	SKIPPED	0.000 s
11	And User_607 Check Approve Screen open without any Error under Asset Management Finalization	SKIPPED	0.001 s
12	And User_607 Click Reverse Under Asset Management Finalization	SKIPPED	0.000 s
13	And User_607 Check Reverse Screen open without any Error under Asset Management Finalization	SKIPPED	0.000 s

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Check the existing asset repossession screen is renamed to "Asset Management Finalization and is available under the Asset Management screen with sub m *

(F) Asset Management

Error 503--Service Unavailable

From RFC 2068 *Hypertext Transfer Protocol -- HTTP/1.1:*

10.5.4 503 Service Unavailable

The server is currently unable to handle the request due to a temporary overloading or maintenance of the server. The implication is that this is a temporary condition which will be alleviated after some delay. If known, the length of the delay may be indicated in a Retry-After header. If no Retry-After is given, the client SHOULD handle the response as it would for a 500 response.

Note: The existence of the 503 status code does not imply that a server must use it when becoming overloaded. Some servers may wish to simply refuse the connection.