


FEATURES SUMMARY -- 2 --



| # | Feature Name | T | P | F | S | Duration |
|---|--------------|---|---|---|---|----------|
| 1 | AR/AP Module | 1 | 0 | 1 | 0 | 4.231 s |

SCENARIOS SUMMARY

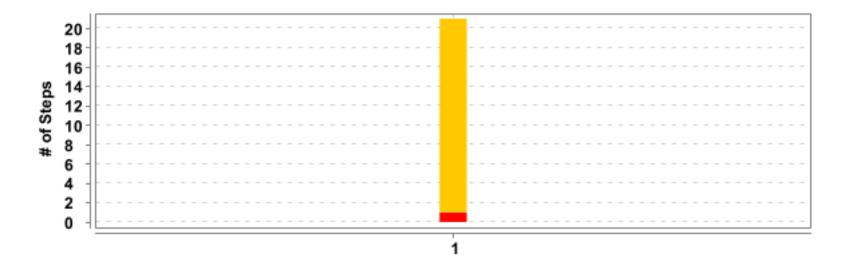


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|--------------|---|----|---|---|----|----------|
| 1 | AR/AP Module | Create Bill against PO & GRN for above vendor | 21 | 0 | 1 | 20 | 4.227 s |

DETAILED SECTION -- 4 --

(F)- AR/AP Module

| FAILED | DURATION - 4.231 s | Scenarios | | Steps | |
|---------------|-----------------------|-----------|---|------------|----|
| | | Total - 1 | | Total - 21 | |
| 7:38:52.174 A | M // 7:38:56.405 AM / | Pass - 0 | 1 | Pass - 0 | 21 |
| | | Fail - 1 | | Fail - 1 | |
| | | Skip - 0 | | Skip - 20 | |

(S)- Create Bill against PO & GRN for above vendor

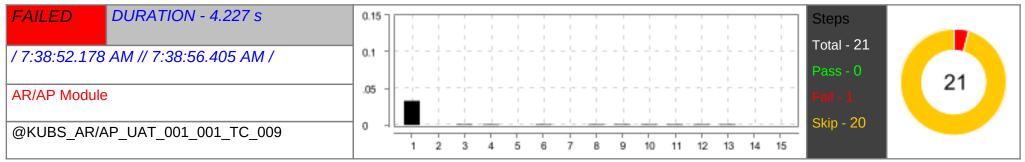

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given User should go to the kubs url and login as a maker user | FAILED | 0.033 s |
| 1 | Given User should go to the kubs url and login as a maker user java.lang.RuntimeException: Json file not found at path: src/main/java/jsonData/ACCOUNTPAYABLE_VendorPurchaseOrderJSON.json at dataProvider.JsonConfig.getVendorPurchaseOrderList(JsonConfig.java:562) at dataProvider.JsonConfig. at dataProvider.JsonConfig. sinit>(JsonConfig.java:147) at stepdefinitions.KUBS_Login. sinit>(KUBS_Login.java:21) at stepdefinitions.ACCOUNTSPAYABLE_VendorContracts. sinit>(ACCOUNTSPAYABLE_VendorContracts.java:30) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(WithCaller(Constructor.java:480) at org.picocontainer.injectors.AbstractInjector.newInstance(AbstractInjector.java:145) at org.picocontainer.injectors.ConstructorInjector\$1.run(ConstructorInjector.java:342) at org.picocontainer.injectors.AbstractInjector\$1.run(ConstructorInjector.java:342) at org.picocontainer.injectors.ConstructorInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjector.getComponentInstance(ConstructorInjector.java:364) at org.picocontainer.injectors.AbstractInjectionFactory\$LifecycleAdapter.getComponentInstance(AbstractInjectionFactory.java:56) | FAILED | 0.033 s |
| | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:647) | | |
| | at org.picocontainer.DefaultPicoContainer.getComponent(DefaultPicoContainer.java:678) | | |
| | at io.cucumber.picocontainer.PicoFactory.getInstance(PicoFactory.java:49) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:71) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$0(TestNGCucumberRunner.java:116) | | |
| | at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:117) | | |
| | at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:113) | | |
| | at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:31) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invokeO(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at org.testng.internal.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:133) | | |
| | at org.testng.internal.TestInvoker.invokeMethod(TestInvoker.java:598) | | |
| | at org.testng.internal.TestInvoker.invokeTestMethod(TestInvoker.java:173) | | |
| | at org.testng.internal.MethodRunner.runInSequence(MethodRunner.java:46) | | |
| | at org.testng.internal.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:824) | | |
| | at org.testng.internal.TestInvoker.invokeTestMethods(TestInvoker.java:146) | | |
| | at org.testng.internal.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:146) | | |
| | at org.testng.internal.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| | at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| | at org.testng.TestRunner.privateRun(TestRunner.java:794) | | |
| | at org.testng.TestRunner.run(TestRunner.java:596) | | |
| | at org.testng.SuiteRunner.runTest(SuiteRunner.java:377) | | |
| | at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:371) | | |
| | at org.testng.SuiteRunner.privateRun(SuiteRunner.java:332) | | |
| | at org.testng.SuiteRunner.run(SuiteRunner.java:276) | | |
| | at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:53) | | |
| | at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:96) | | |
| | at org.testng.TestNG.runSuitesSequentially(TestNG.java:1212) | | |
| | at org.testng.TestNG.runSuitesLocally(TestNG.java:1134) | | |
| | at org.testng.TestNG.runSuites(TestNG.java:1063) | | |
| | at org.testng.TestNG.run(TestNG.java:1031) | | |

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115) at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251) at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77) | | |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.244 s |
| | screenshot | | |
| | + | | |
| | | | |
| 2 | And user should navigate to accounts payable menu | SKIPPED | 0.000 s |
| 3 | When click on eye button of invoice booking | SKIPPED | 0.001 s |
| 4 | And click on add button for invoice booking | SKIPPED | 0.001 s |
| 5 | And Fill the required fields for invoice booking | SKIPPED | 0.000 s |
| 6 | Then Save and submit the invoice billing | SKIPPED | 0.001 s |
| 7 | And User should go to the kubs url and login as a reviewer user | SKIPPED | 0.000 s |
| 8 | Then Click on notification button in reviewer | SKIPPED | 0.001 s |
| 9 | And approve the record by the reviewer user | SKIPPED | 0.001 s |
| 10 | Given User should go to the kubs url and login as a checker user | SKIPPED | 0.001 s |
| 11 | And Click on security management in checker | SKIPPED | 0.001 s |
| 12 | Then Click on open pool in checker | SKIPPED | 0.001 s |
| 13 | And Click on claim button in checker | SKIPPED | 0.001 s |
| 14 | And capture claimed status | SKIPPED | 0.000 s |
| 15 | Then click on notification in checker | SKIPPED | 0.000 s |
| 16 | Then checker should approved the invoice billing | SKIPPED | 0.000 s |
| 17 | Given User should go to the kubs url and login as a maker user | SKIPPED | 0.000 s |
| 18 | And user should navigate to accounts payable menu | SKIPPED | 0.000 s |
| 19 | When click on eye button of invoice booking | SKIPPED | 0.001 s |
| 20 | Then Get the invoice status | SKIPPED | 0.000 s |
| 21 | And maker should logout | SKIPPED | 0.000 s |

EXPANDED SECTION -- 7 -

