Cucumber Report

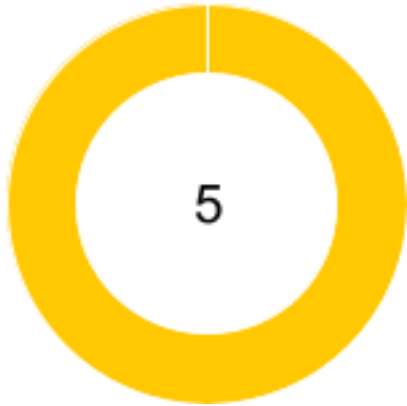| Start : Apr 17, 1:30:50.497 AM	End : Apr 17, 1:32:41.555 AM	Duration : 1 m 51.058 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 0 SKIPPED - 5
1	1	5

#	Feature Name	T	P	F	S	Duration
1	AR/AP Module	1	0	1	0	1 m 51.058 s
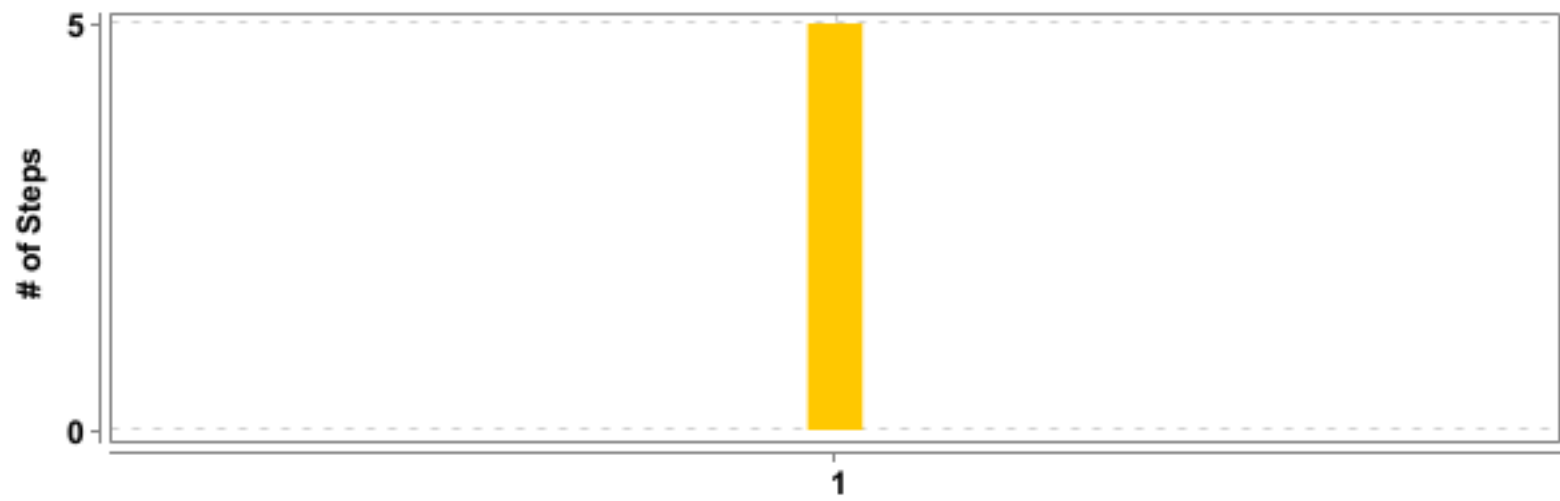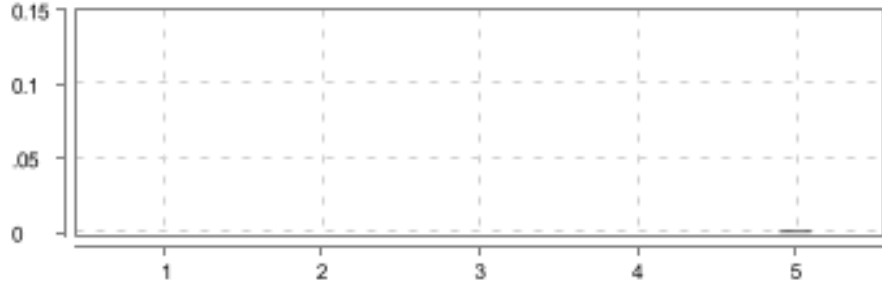
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	AR/AP Module	Verify Tax details is correctly displayed for Item details in Billing	5	0	0	5	1 m 51.026 s

(F)- AR/AP Module

FAILED	DURATION - 1 m 51.058 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0	1	Steps Total - 5 Pass - 0 Fail - 0 Skip - 5	5
/ 1:30:50.497 AM // 1:32:41.555 AM /					

(S)- Verify Tax details is correctly displayed for Item details in Billing

FAILED	DURATION - 1 m 51.026 s		Steps Total - 5 Pass - 0 Fail - 0 Skip - 5	5
/ 1:30:50.528 AM // 1:32:41.554 AM /				
AR/AP Module				
@KUBS_AR/AP_UAT_001_001_TC_010 @AR/AP				

#	Step / Hook Details	Status	Duration
	BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario)	FAILED	1 m 50.563 s

	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: chrome not reachable Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}}]
	  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:126)
	  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:84)
	  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:62)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	  at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:244)
	  at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:166)
	  at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:89)
	  at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:99)
	  at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:86)
	  at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:41)		

#	Step / Hook Details	Status	Duration
	at resources.BaseClass.initializeDriver(BaseClass.java:28) at stepdefinitions.HooksClass.browserSetup(HooksClass.java:32)		
1	Given User should go to the kubs url and login as a maker user	SKIPPED	0.000 s
2	And user should navigate to accounts payable menu	SKIPPED	0.000 s
3	When click on eye button of invoice booking	SKIPPED	0.000 s
4	Then Get the tax details and check	SKIPPED	0.000 s
5	And maker should logout	SKIPPED	0.001 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.025 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.close()" because "this.driver" is null at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		