

FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	Checking the Supplementary Budget functionality	1	0	1	0	16.659 s

SCENARIOS SUMMARY

-- 3 --




#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Checking the Supplementary Budget	User should be able to raise supplementary request for	8	6	1	1	16.657 s
	functionality	Monthly budget					

DETAILED SECTION -- 4 --

(F)- Checking the Supplementary Budget functionality

FAILED	DURATION - 16.659 s	Scenarios		Steps	
		Total - 1		Total - 8	
/ 12:41:21.226 /	AM // 12:41:37.885 AM /	Pass - 0	1	Pass - 6	8
		Fail - 1.		Fail - 1	
		Skip - 0		Skip - 1	

(S)- User should be able to raise supplementary request for Monthly budget

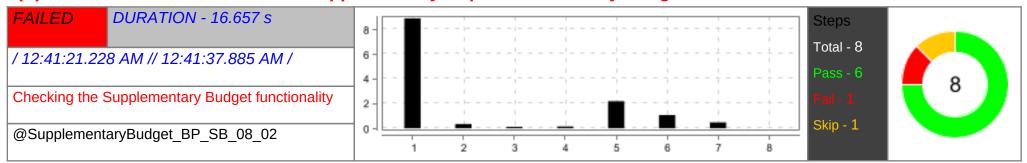

#	Step / Hook Details	Status	Duration
1	Given maker should navigate to the url and login with valid credentials	PASSED	8.894 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.236 s
	screenshot		
	# O AND TO SAME TO SA		
2	And maker should navigate to the budget module	PASSED	0.348 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.179 s
	screenshot		


#	Step / Hook Details	Status	Duration
	The Control State of the Contr		
3	And maker click on budget field	PASSED	0.116 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.124 s
	screenshot		
	The Continue of the Continue o		
4	When maker click on budget supplementary eye icon	PASSED	0.143 s
1 1	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot	PASSED	0.102 s
5	And click on add button on budget supplementary view page	PASSED	2.190 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.164 s
	screenshot		
	## Orange Services ## Orange		
6	Then fill required data	PASSED	1.073 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.109 s
	screenshot		


#	Step / Hook Details	Status	Duration
	Prince Special Control		
7	Then fill apportion amount	FAILED	0.477 s
	org.openqa.selenium.JavascriptException: javascript error: Cannot read properties of null (reading 'shadowRoot') (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os. name: Windows 10', os. arch': 'amd64', os.version: '10.0', java-version: '17.0', 10' Driver info: 'org.openqa.selenium.chrome.ChromeDriver Command: [439ffb839471ff63cb628784fb717312, executeScript (script=return document.querySelector("ioincloast").shadowRoot. querySelector("ioinclass="toast-message").innerText, args=[]] Capabilities (acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: [chromedriverVersion: 96.0.4664.46, userPatablic: C:UbsersUNINDC—14ppDatalL], goog:chromeOptions: (debuggerAddress: localhost-62578), javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDCWS, platformName: WINDCWS, proxy; Proxy), sec.dp: ws://localhost-62578/devtoo, sec.dpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000), script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 439ffb839471ff63cb628784fb717312 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:79) at java.base/java.lang.reflect.Constructor.newInstanceWiltCaller(Constructor.java:490) at java.base/java.lang.reflect.Constructor.newInstanceWiltCaller(Constructor.java:490) at java.base/java.lang.reflect.Constructor.newInstanceWiltCaller(Constructor.java:490) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCo		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.211 s
	screenshot		

DETAILED SECTION -- 7 --


#	Step / Hook Details	Status	Duration
	The state of the		
8	Then validate maker can save request for the monthly budget	SKIPPED	0.000 s

EXPANDED SECTION -- 8 --

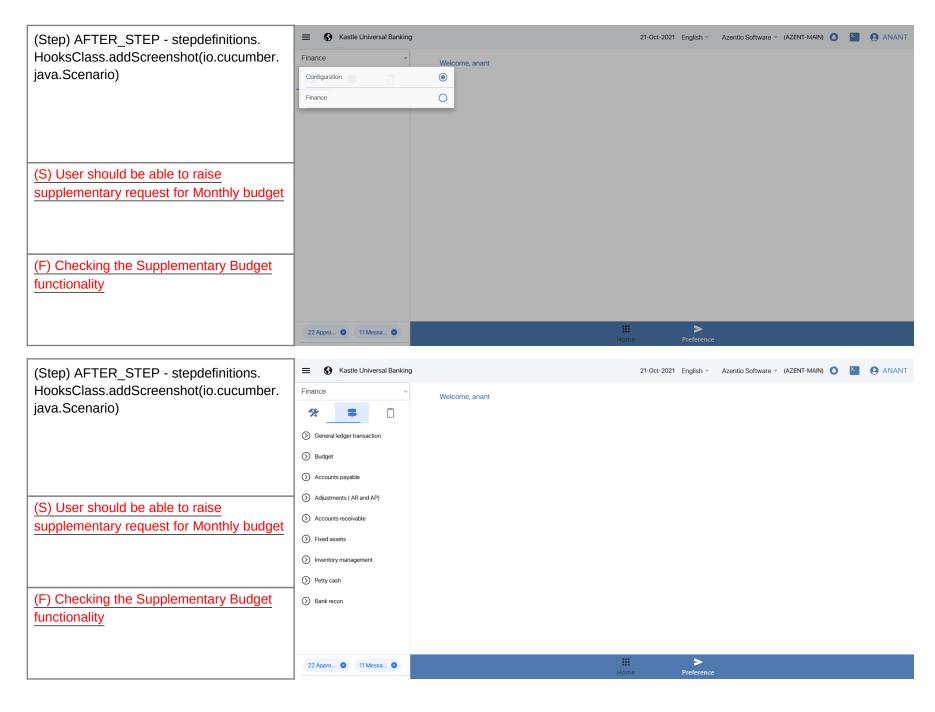

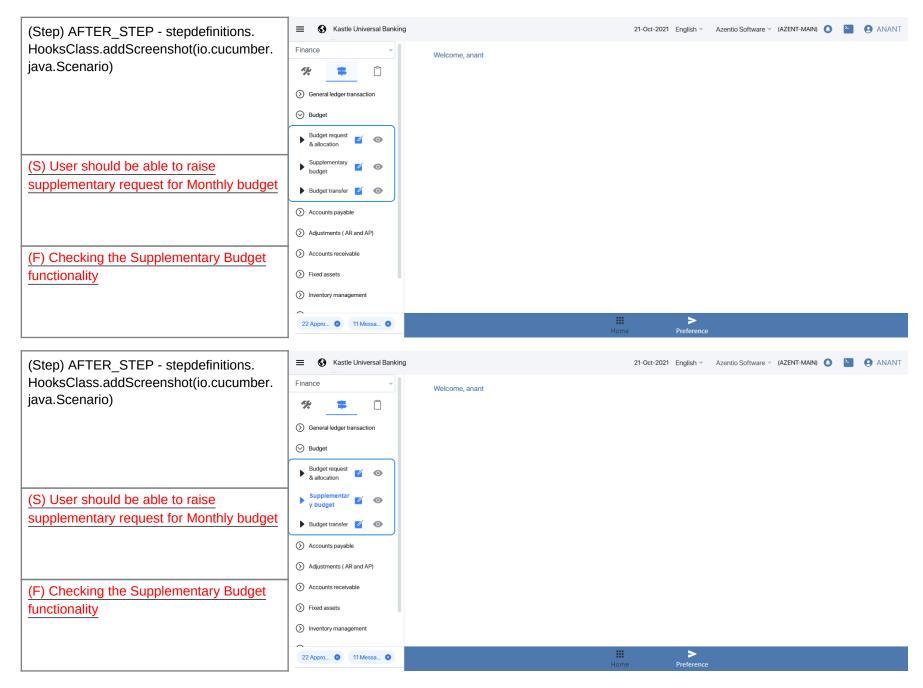

EXPANDED SECTION -- 10 --

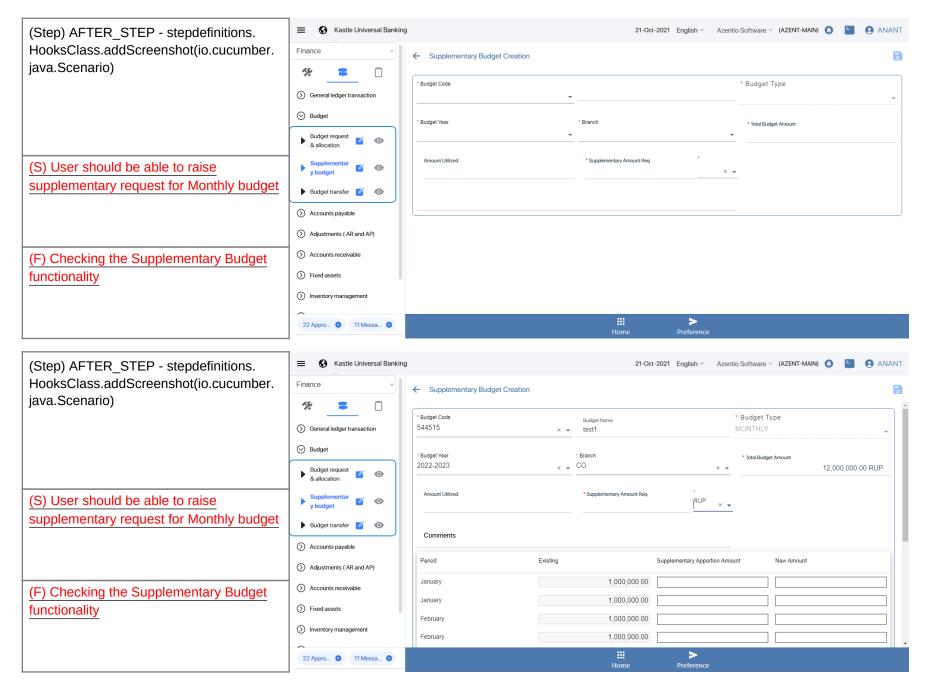

EXPANDED SECTION -- 11 --

