Cucumber Report

| Start : Nov 09, 1:06:38.407 PM	End : Nov 09, 1:17:58.310 PM	Duration : 11 m 19.903 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 10 FAILED - 1 SKIPPED - 0

#	Feature Name	T	P	F	S	Duration
1	AR/AP Module	1	0	1	0	11 m 19.903 s
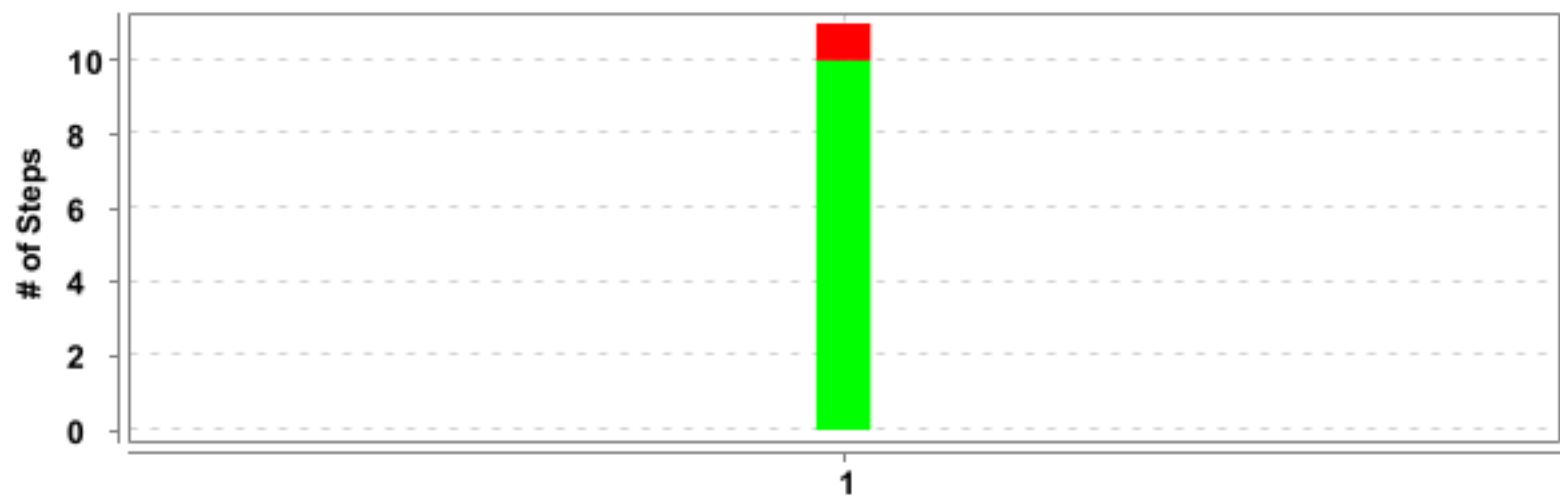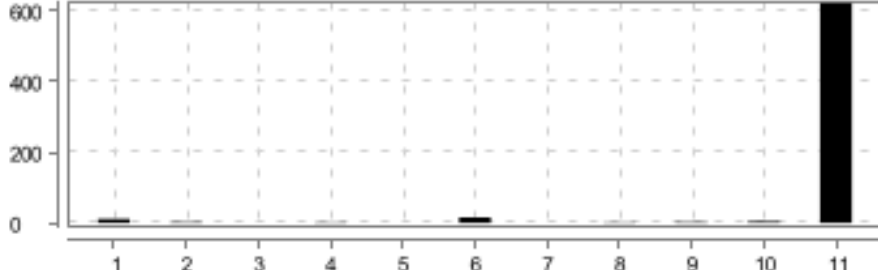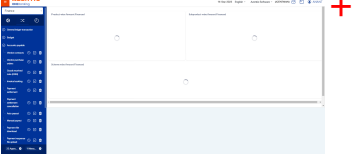
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	AR/AP Module	Create a contract for an active vendor with expense type Purchases	11	10	1	0	11 m 19.900 s
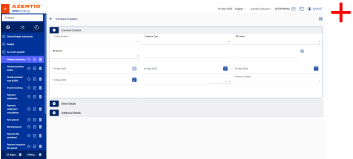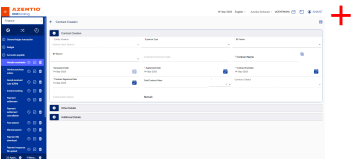
(F)- AR/AP Module

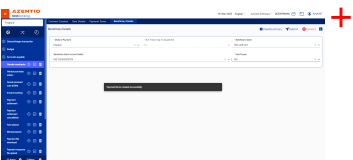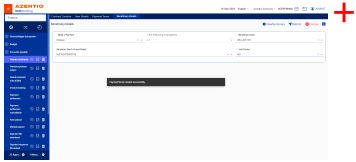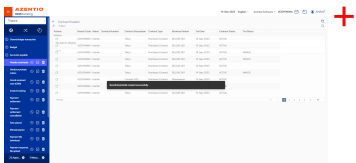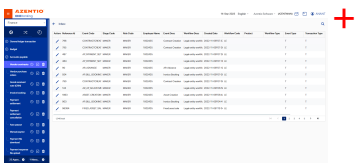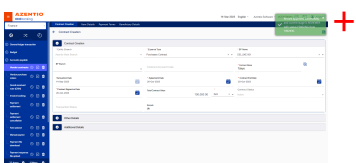| FAILED	DURATION - 11 m 19.903 s	Scenarios		Steps	
		Total - 1		Total - 11	
/ 1:06:38.407 PM // 1:17:58.310 PM /		Pass - 0	**1**	Pass - 10	**11**
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 0	

(S)- Create a contract for an active vendor with expense type Purchases

FAILED	DURATION - 11 m 19.900 s		Steps	
/ 1:06:38.410 PM // 1:17:58.310 PM /			Total - 11	
AR/AP Module			Pass - 10	**11**
@KUBS_AR/AP_UAT_001_001_TC_001_01			Fail - 1	
			Skip - 0	

#	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	PASSED	11.614 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.252 s
	screenshot		
	+		
2	And user should navigate to accounts payable menu	PASSED	2.744 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.163 s
	screenshot		
	+		

#	Step / Hook Details	Status	Duration
3	When click on eye button of vendor contract	PASSED	0.201 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.207 s
	screenshot		
	+		
4	And click on add button to create contract	PASSED	1.630 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.230 s
	screenshot		
	+		
5	And user update the data set ID for vendor contract	PASSED	0.002 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.175 s
	screenshot		
	+		
6	And Fill the required fields to create contract	PASSED	15.361 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.192 s
	screenshot		
	+		
7	And Save the Record from maker	PASSED	0.101 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.203 s
	screenshot		

#	Step / Hook Details	Status	Duration
8	Then click on the Notification icon	PASSED	1.772 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.203 s
	screenshot		
9	Then store the Reference ID and open the vendor contract record	PASSED	2.513 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.194 s
	screenshot		
10	Then click submit and enter remark for vendor contract	PASSED	4.811 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.154 s
	screenshot		
11	Then Save and submit the creation contract record	FAILED	10 m 21.900 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [cb7eff4e4c30c74f78b1ded58158b1e7, findElement {using=xpath, value=//datatable-pager[1]/ul[1]/li[8]/a[1]/i[1]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:51322}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:51322/devtoo..., se:cdpVersion: 99.0.4844.82,		

#	Step / Hook Details	Status	Duration

	setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: cb7eff4e4c30c74f78b1ded58158b1e7
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	   at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	   at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	   at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381)
	   at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373)
	   at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70)
	   at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39)
	   at jdk.proxy2/jdk.proxy2.$Proxy46.isDisplayed(Unknown Source)
	   at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:307)
	   at org.openqa.selenium.support.ui.ExpectedConditions.access$000(ExpectedConditions.java:40)
	   at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:293)
	   at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:290)
	   at org.openqa.selenium.support.ui.ExpectedConditions$23.apply(ExpectedConditions.java:660)
	   at org.openqa.selenium.support.ui.ExpectedConditions$23.apply(ExpectedConditions.java:656)
	   at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:208)
	   at helper.WaitHelper.waitForElement(WaitHelper.java:81)
	   at stepdefinitions.ACCOUNTSPAYABLE_VendorContracts. save_and_submit_the_creation_contract_record(ACCOUNTSPAYABLE_VendorContracts.java:442)
	   at ?.Save and submit the creation contract record(file:///C:/Users/inindc00089/eclipse-workspace/AzentioAutomationFramework_ARAP/src/ test/java/features/ArAp1.feature:17)
	 * Not displayable characters are replaced by '?'.		

	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	FAILED	12.199 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [cb7eff4e4c30c74f78b1ded58158b1e7, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:51322}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:51322/devtoo..., se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts:		

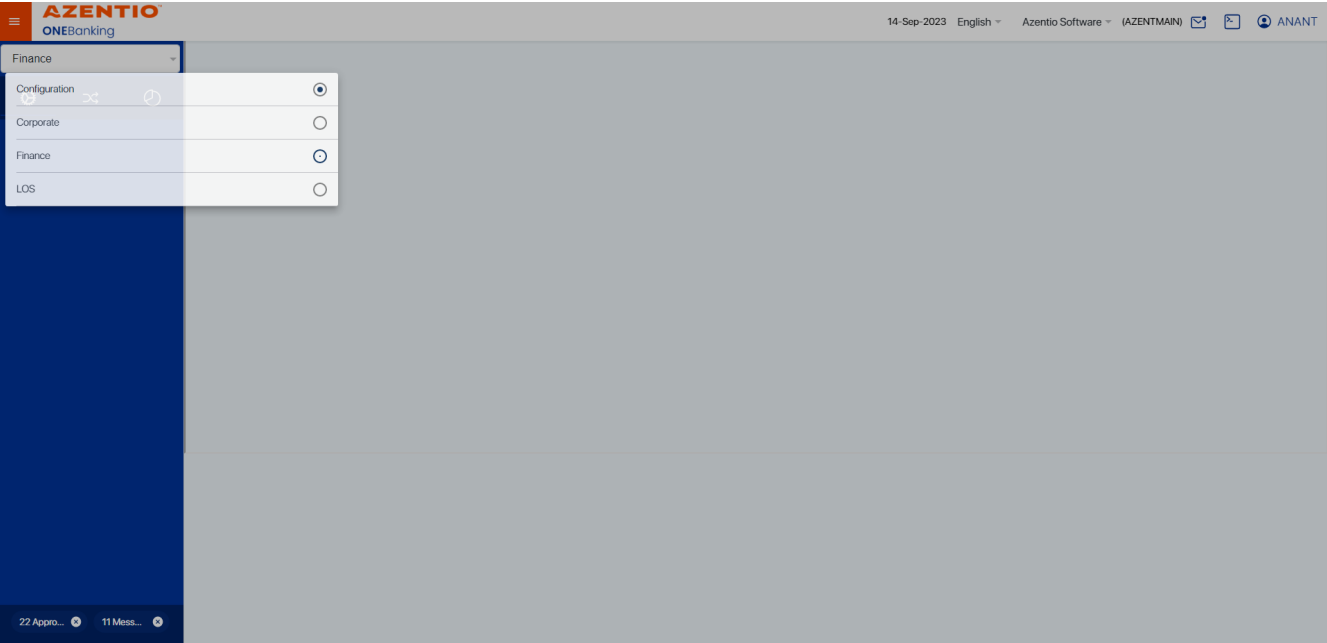| #	Step / Hook Details	Status	Duration

	{implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: cb7eff4e4c30c74f78b1ded58158b1e7
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)
	   at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347)
	   at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		

	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.259 s

	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [cb7eff4e4c30c74f78b1ded58158b1e7, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:51322}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:51322/devtoo..., se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: cb7eff4e4c30c74f78b1ded58158b1e7
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432) at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

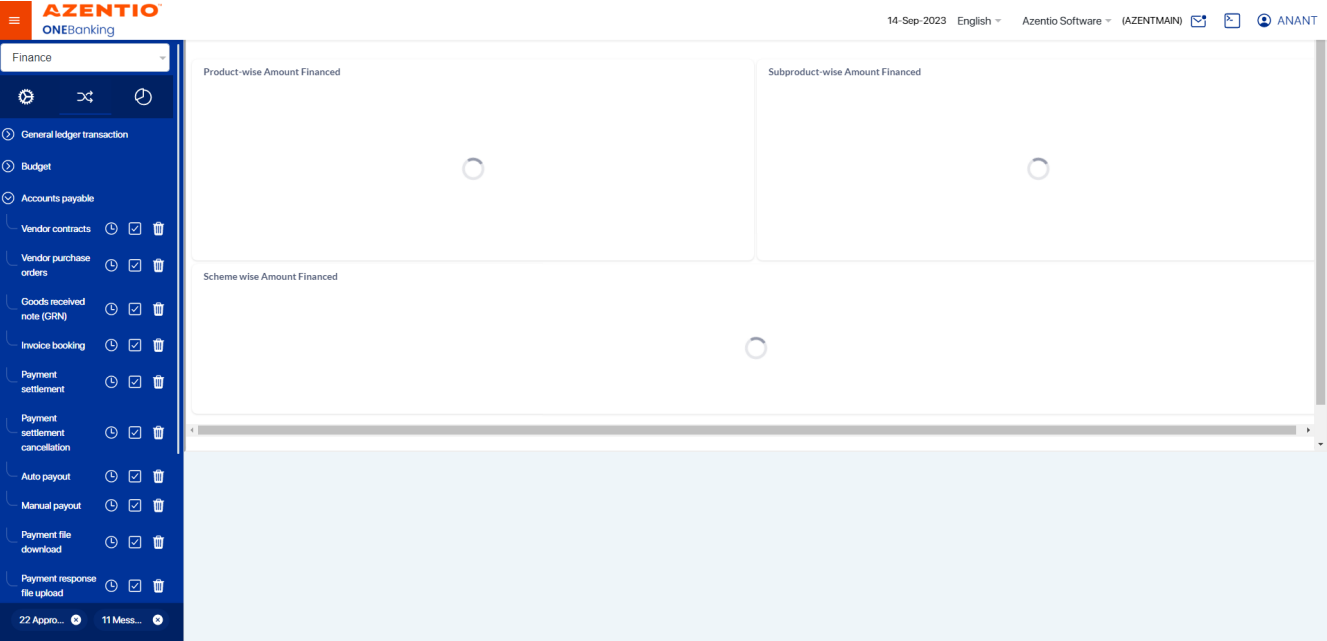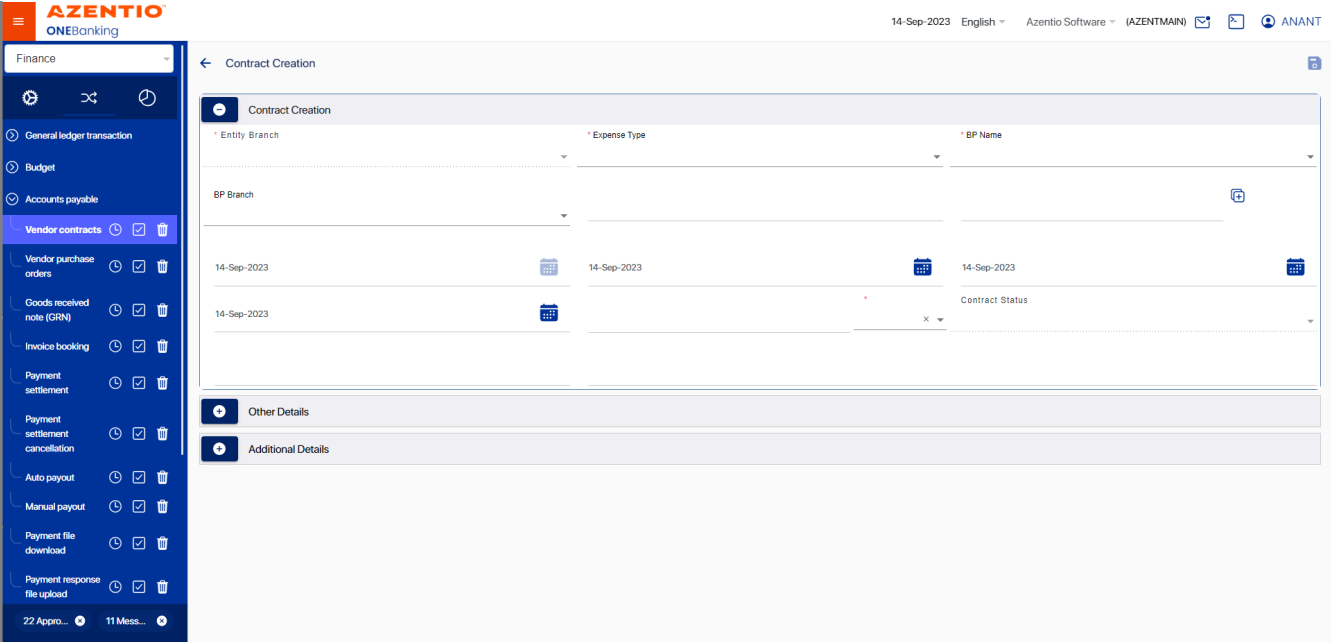(S) Create a contract for an active vendor with expense type Purchases

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Create a contract for an active vendor with expense type Purchases

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a contract for an active vendor
with expense type Purchases

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a contract for an active vendor
with expense type Purchases

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a contract for an active vendor
with expense type Purchases

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a contract for an active vendor
with expense type Purchases

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a contract for an active vendor
with expense type Purchases

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a contract for an active vendor
with expense type Purchases

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a contract for an active vendor
with expense type Purchases

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a contract for an active vendor
with expense type Purchases

(F) AR/AP Module