
Duration: 3 m 48.627 s Start: Feb 11, 10:20:48.468 AM End: Feb 11, 10:24:37.095 AM Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 0 SKIPPED - 0 SKIPPED - 0 SKIPPED - 20 21 40 50 60 40 50 60 40 50 60 30 Pass % 70 30 Pass % 70 30 Pass % 70 20 20 20 80 80 80 90 90 100

FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	FIXED ASSETS	1	0	1	0	3 m 48.627 s

SCENARIOS SUMMARY

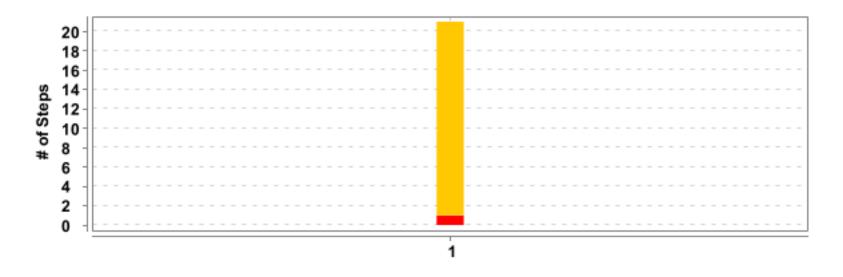


:	#	Feature Name	Scenario Name	T	P	F	S	Duration
	1	FIXED ASSETS	Check if the given asset is sold at higher price	21	0	1	20	3 m 48.619 s

DETAILED SECTION -- 4 --

(F)- FIXED ASSETS

FAILED	DURATION - 3 m 48.627 s	Scenarios		Steps	
		Total - 1		Total - 21	
/ 10:20:48.468 A	AM // 10:24:37.095 AM /	Pass - 0	1	Pass - 0	21
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 20	

(S)- Check if the given asset is sold at higher price

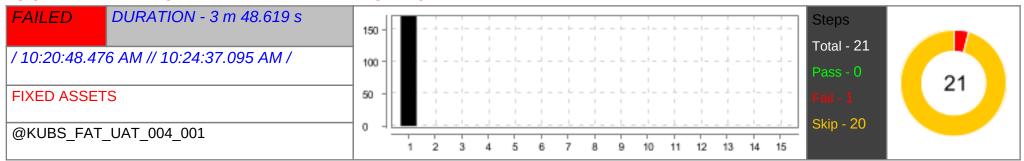

#	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	FAILED	2 m 50.738 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [1d9fd17a7cd03cc05a16f64ada970dfc, findElement {using=xpath, value=//input[@id='pwd1']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46, userDatabir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:59906}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:59906/devtoo, se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 1d9fd17a7cd03cc05a16f64ada970dfc at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy46.isDisplayed(Unknown Source) at org.openqa.selenium.support.ui.ExpectedConditions.elementlfVisible(ExpectedConditions.java:307) at org.openqa.selenium.support.ui.ExpectedConditions.elementlfVisible(ExpectedConditions.java:40) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:290) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:290) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:656) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:656) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:656) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:656) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:656) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:656) at org.openqa.selen		
	*Not displayable characters are replaced by '?'. AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [1d9fd17a7cd03cc05a16f64ada970dfc, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45} (76e4c1bb2ab46, userDataDir: C:\Users\NINDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:59906}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:59906/devtoo, se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:virtualAuthenticators: true} Session ID: 1d9fd17a7cd03cc05a16f64ada970dfc at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/jak.internal.reflect.DelegatingConstructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:33) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)	FAILED	12.017 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347) at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		
2	And user should navigate to fixed asset menu	SKIPPED	0.001 s
3	When click on eye button of asset sale	SKIPPED	0.000 s
4	And click on add button to create sale asset record	SKIPPED	0.000 s
5	And Fill the required fields to sale asset	SKIPPED	0.001 s
6	Then Save and submit the asset sale record	SKIPPED	0.000 s
7	And User should go to the kubs url and login as a reviewer user	SKIPPED	0.000 s
8	Then Click on notification button in reviewer	SKIPPED	0.001 s
9	And approve the record by reviewer user	SKIPPED	0.000 s
10	Given User should go to the kubs url and login as a checker user	SKIPPED	0.000 s
11	And Click on security management in checker	SKIPPED	0.000 s
12	Then Click on open pool in checker	SKIPPED	0.000 s
13	And Click on claim button in checker	SKIPPED	0.000 s
14	And capture claimed status	SKIPPED	0.000 s
15	Then click on notification in checker	SKIPPED	0.001 s
16	Then checker should approved the asset sale	SKIPPED	0.000 s
17	Given User should go to the kubs url and login as a maker user	SKIPPED	0.001 s
18	And user should navigate to fixed asset menu	SKIPPED	0.000 s
19	When click on eye button of asset sale	SKIPPED	0.001 s
20	Then click on first eye button to get the profit earned	SKIPPED	0.000 s
21	And maker should logout	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.236 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [1d9fd17a7cd03cc05a16f64ada970dfc, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46, userDataDir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:59906}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:59906/devtoo, se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:virtualAuthenticators: true} Session ID: 1d9fd17a7cd03cc05a16f64ada970dfc		

DETAILED SECTION -- 7 --

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)		
	at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432)		
	at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		