Cucumber Report

| Start : Nov 28, 2:07:37.658 PM	End : Nov 28, 2:08:02.699 PM	Duration : 25.041 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 4 FAILED - 1 SKIPPED - 0

#	Feature Name	T	P	F	S	Duration
1	AR/AP Module	1	0	1	0	25.041 s
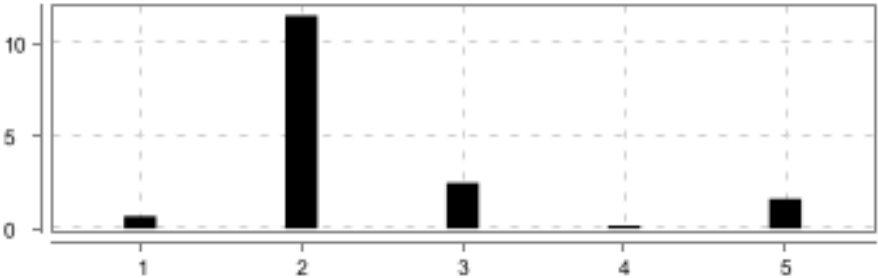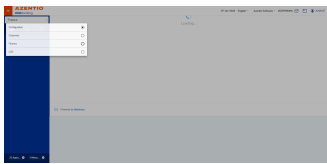
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	*AR/AP Module*	*PO should be displayed in approved queue with Active Status in maker*	5	4	1	0	25.037 s
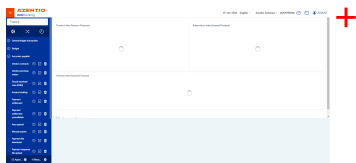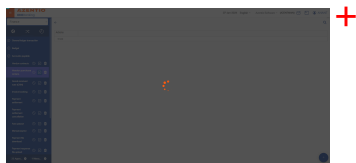
(F)- AR/AP Module
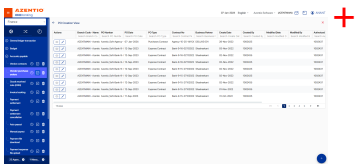
FAILED	DURATION - 25.041 s	Scenarios		Steps	
		Total - 1		Total - 5	
/ 2:07:37.658 PM // 2:08:02.699 PM /		Pass - 0	1	Pass - 4	5
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 0	

(S)- PO should be displayed in approved queue with Active Status in maker

FAILED	DURATION - 25.037 s		Steps	
			Total - 5	
/ 2:07:37.662 PM // 2:08:02.699 PM /			Pass - 4	5
AR/AP Module			Fail - 1	
@KUBS_AR/AP_UAT_001_001_TC_02_04			Skip - 0	

#	Step / Hook Details	Status	Duration
1	And user update the data set ID for Purchase Order	PASSED	0.661 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.158 s
	screenshot		
	+		
2	Given User should go to the kubs url and login as a maker user	PASSED	11.494 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.265 s
	screenshot		
	+		

#	Step / Hook Details	Status	Duration
3	And user should navigate to accounts payable menu	PASSED	2.466 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.192 s
	screenshot 		
4	Then Click on purchase order Eye Icon	PASSED	0.160 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.201 s
	screenshot 		
5	Then Get the purchase order Txn status by searching the record via business partner	FAILED	1.600 s

	org.openqa.selenium.ElementNotInteractableException: element not interactable (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [a03bf103ffcd3043e783dbbfd8443487, sendKeysToElement {id=5e851e8b-02b6-4035-9921-52348f858d61, value=[Ljava.lang.CharSequence;@f44d033}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:58685}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:58685/devtoo..., se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Element: [[ChromeDriver: chrome on WINDOWS (a03bf103ffcd3043e783dbbfd8443487)] -> xpath: (//ion-buttons/ion-item/ion-icon)[2]] Session ID: a03bf103ffcd3043e783dbbfd8443487
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:251) at org.openqa.selenium.remote.RemoteWebElement.sendKeys(RemoteWebElement.java:107) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:52) at jdk.proxy2/jdk.proxy2.$Proxy46.sendKeys(Unknown Source) at stepdefinitions.AccountPayable_VendorPurchaseOrder. get_the_purchase_order_txn_status_by_searching_the_record_via_business_partner(AccountPayable_VendorPurchaseOrder.java:481) at ?.Get the purchase order Txn status by searching the record via business partner(file:///C:/Users/inindc00089/eclipse-workspace/AzentioAutomationFramework_ARAP/src/test/java/features/ArAp1.feature:107) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.144 s

(Step) AFTER_STEP - stepdefinitions.
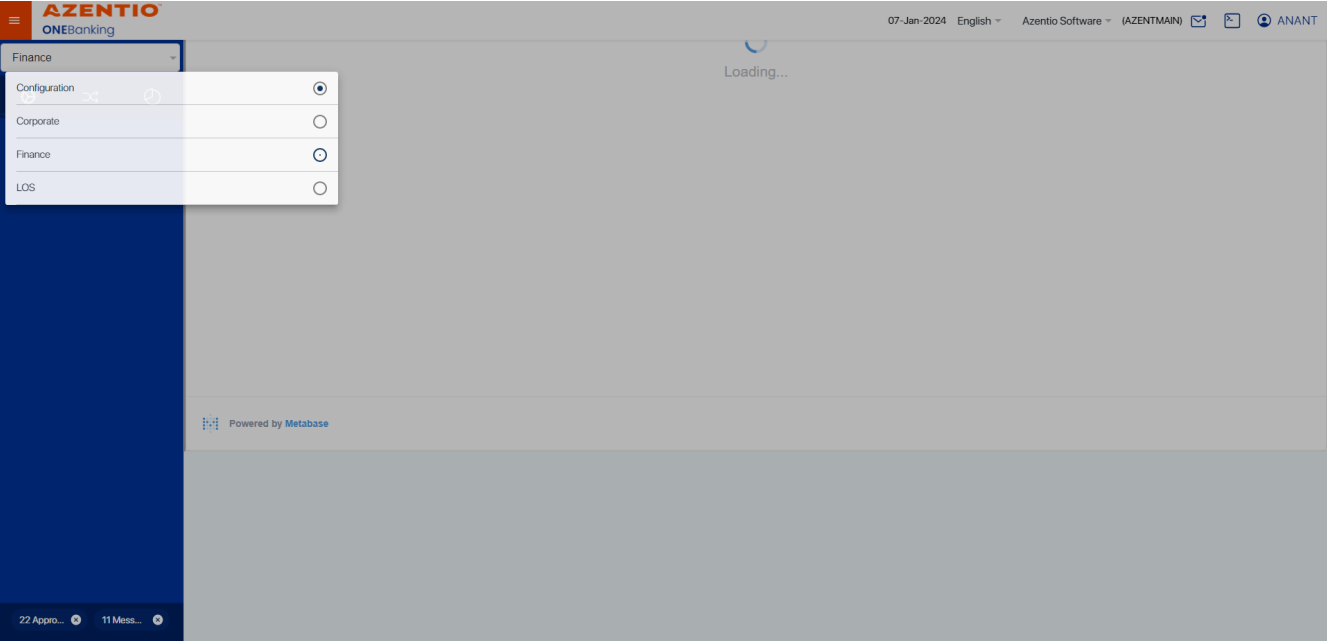HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) PO should be displayed in approved
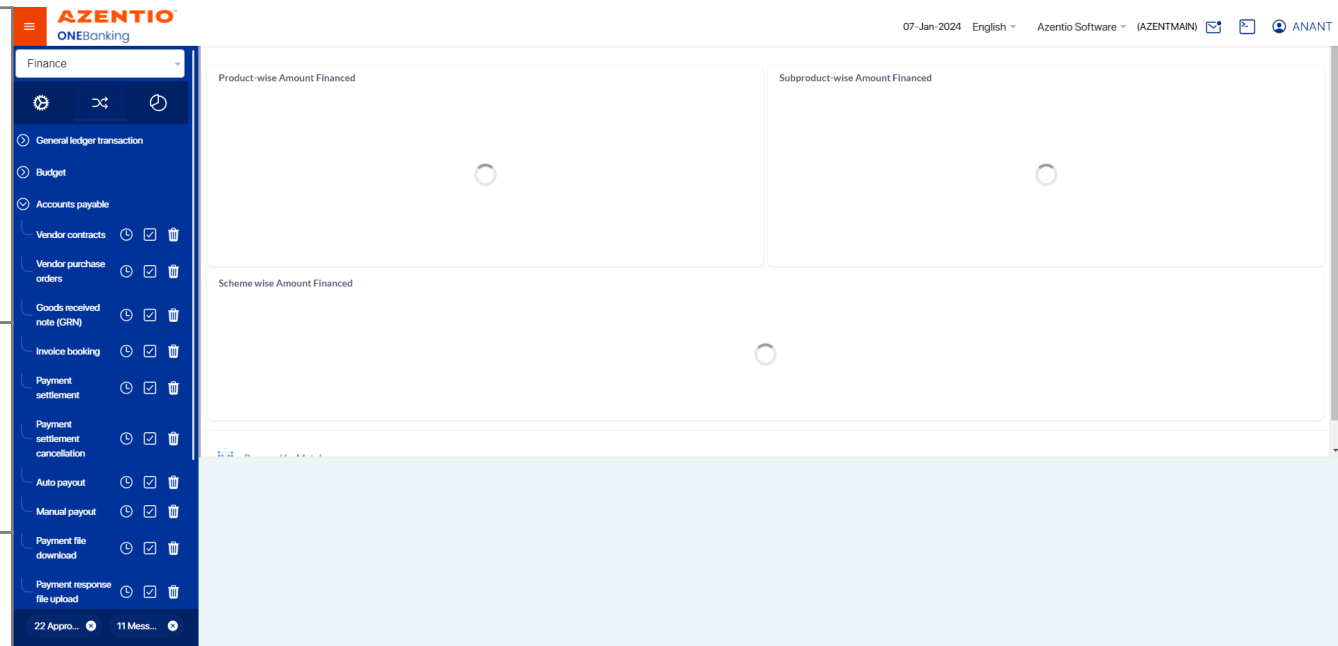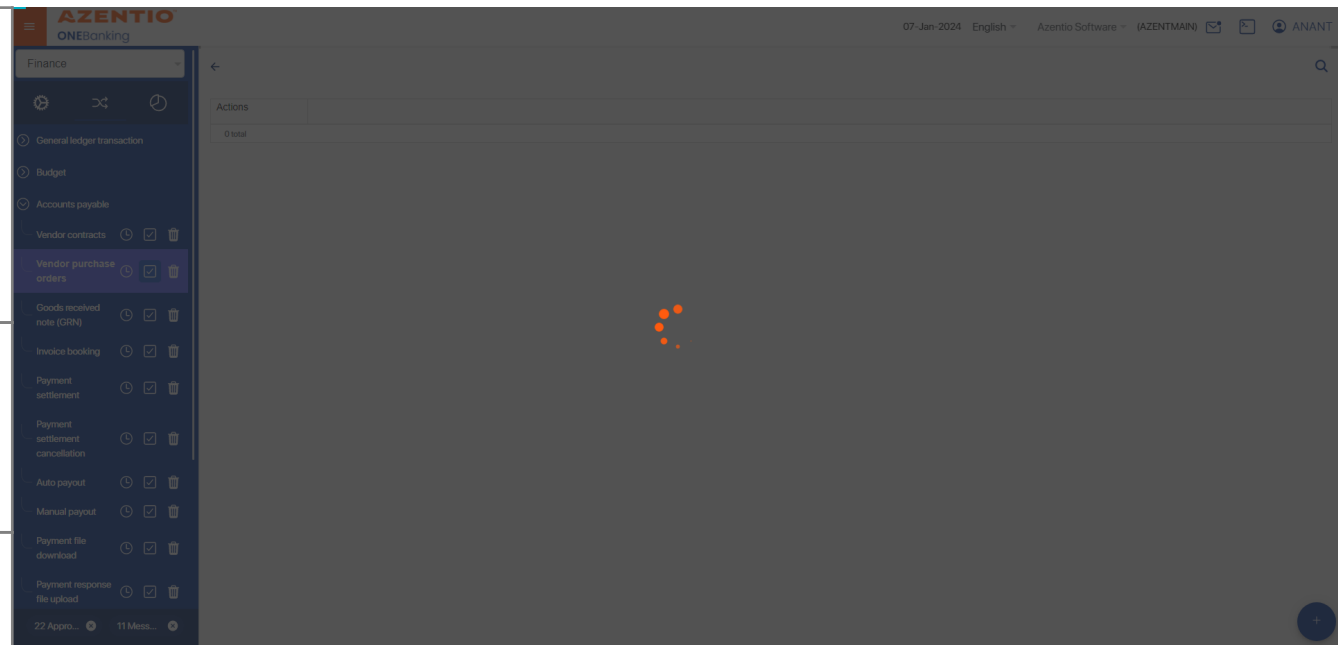queue with Active Status in maker

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) PO should be displayed in approved
queue with Active Status in maker

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) PO should be displayed in approved
queue with Active Status in maker

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) PO should be displayed in approved
queue with Active Status in maker

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) PO should be displayed in approved
queue with Active Status in maker

(F) AR/AP Module