

Cucumber Report

8 Feb 2023, 9:31:33 AM

Start : Feb 08, 9:29:23.985 AM

End : Feb 08, 9:31:31.548 AM

Duration : 2 m 7.563 s

Features


Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0


PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 1
SKIPPED - 22

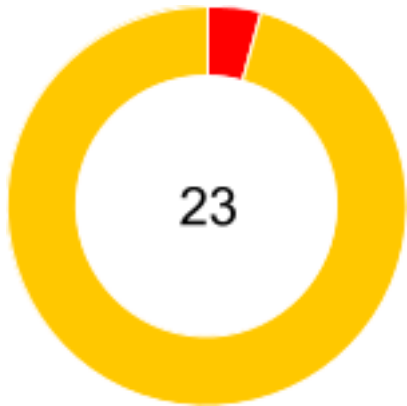



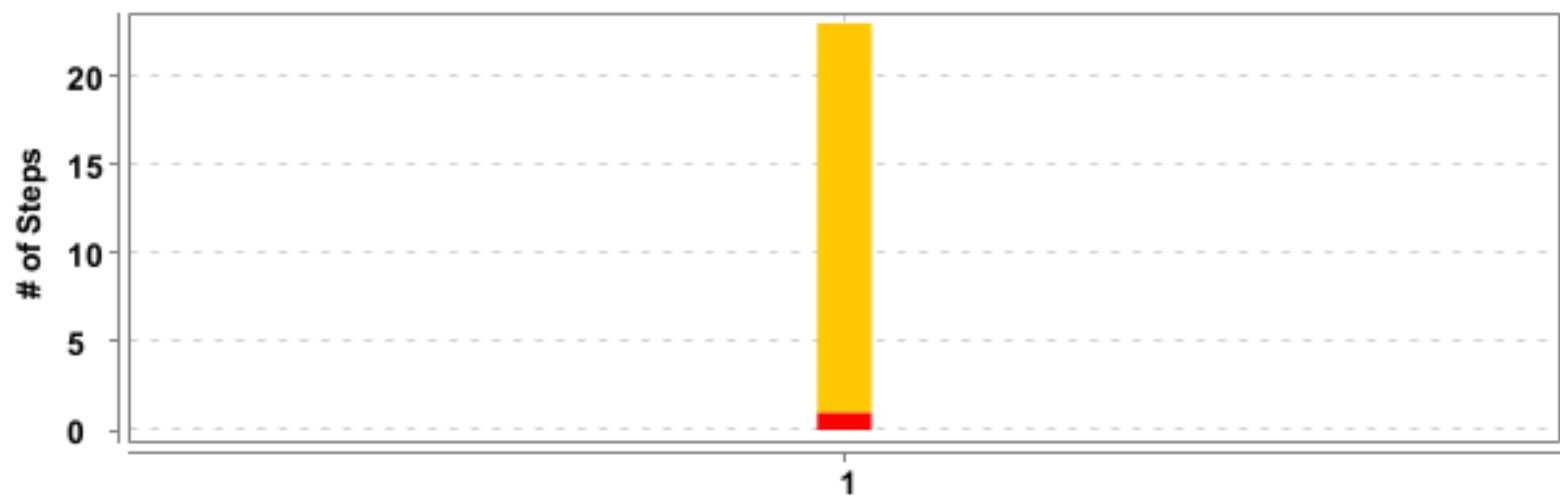

| # | Feature Name | T | P | F | S | Duration |
|---|--------------|---|---|---|---|-------------|
| 1 | AR/AP Module | 1 | 0 | 1 | 0 | 2 m 7.563 s |





| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|--------------|--|----|---|---|----|-------------|
| 1 | AR/AP Module | Check creating Bill against cancelled GRN is not allowed | 23 | 0 | 1 | 22 | 2 m 7.552 s |

(F)- AR/AP Module

| | | | | | |
|--------------------------------------|-------------------------------|-----------|---|------------|---|
| FAILED | DURATION - 2 m 7.563 s | Scenarios |  | Steps |  |
| / 9:29:23.985 AM // 9:31:31.548 AM / | | Total - 1 | | Total - 23 | |
| | | Pass - 0 | | Pass - 0 | |
| | | Fail - 1 | | Fail - 1 | |
| | | Skip - 0 | | Skip - 22 | |


(S)- Check creating Bill against cancelled GRN is not allowed
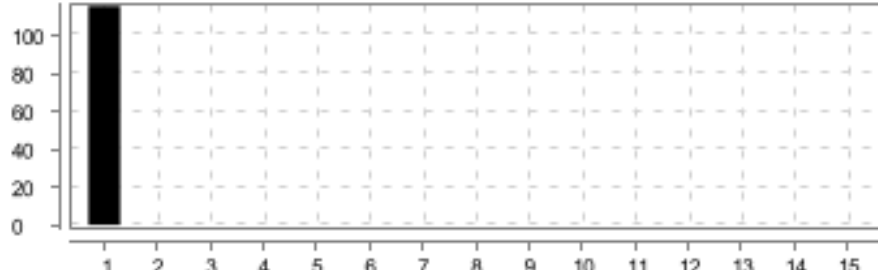
| | | | | |
|---|--|---|---|--|
| <div>FAILED</div> <div>DURATION - 2 m 7.552 s</div> | | <div></div> | <div>Steps</div> <div>Total - 23</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 22</div> | <div></div> |
| / 9:29:23.996 AM // 9:31:31.548 AM / | | | | |
| AR/AP Module | | | | |
| @KUBS_AR_AP_UAT_003_003_TC_05 @AR/AP | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------------|--------------|
| 1 | <p>Given User should go to the kubs url and login as a maker user</p> <p>org.openqa.selenium.TimeoutException: Expected condition failed: waiting for visibility of Proxy element for: DefaultElementLocator 'By.xpath: //ion-select[@aria-label='Amlock']' (tried for 60 second(s) with 2 milliseconds interval)</p> <p>at org.openqa.selenium.support.ui.FluentWait.timeoutException(FluentWait.java:263)</p> <p>at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:231)</p> <p>at helper.WaitHelper.waitForElementToVisibleWithFluentWait(WaitHelper.java:102)</p> <p>at stepdefinitions.KUBS_Login.loginToAzentioAppByMaker(KUBS_Login.java:47)</p> <p>at stepdefinitions.ACCOUNTSPAYABLE_VendorContracts.</p> <p>user_should_go_to_the_kubs_url_and_login_as_a_maker_user(ACCOUNTSPAYABLE_VendorContracts.java:50)</p> <p>at ?.User should go to the kubs url and login as a maker user(file:///C:/Users/ININDC00089/git/AzentioAutomationFramework/ArAp/AzentioAutomationFramework_ARAP_Excel/src/test/java/features/ArAp3.feature:293)</p> <p>Caused by: org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//ion-select[@aria-label='Amlock']"} (Session info: chrome=109.0.5414.74) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.122', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [1ff4e46dafdaa1687231f362ce3ab039, findElement {using=xpath, value=//ion-select[@aria-label='Amlock']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 109.0.5414.74, chrome: {chromedriverVersion: 108.0.5359.22 (ec46c90f5938..., userDataDir: C:\Users\ININDC~1\AppData\Local\Google\Chrome\User Data\Default\Profile 1\Extensions\pfnldbfapknjaccodjplgajaojnmipjflj}, goog:chromeOptions: {debuggerAddress: localhost:53718}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53718/devtoo..., se:cdpVersion: 109.0.5414.74, setWindowRect: true, strictFileInteractability: false, timeouts:</p> | FAILED | 1 m 55.441 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | <pre> {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 1ff4e46dafdaa1687231f362ce3ab039 at jdk.internal.reflect.GeneratedConstructorAccessor37.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy46.isDisplayed(Unknown Source) at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:307) at org.openqa.selenium.support.ui.ExpectedConditions.access\$000(ExpectedConditions.java:40) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:293) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:290) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:208) at helper.WaitHelper.waitForElementToVisibleWithFluentWait(WaitHelper.java:102) at stepdefinitions.KUBS_Login.loginToAzentioAppByMaker(KUBS_Login.java:47) at stepdefinitions.ACCOUNTSPAYABLE_VendorContracts. user_should_go_to_the_kubs_url_and_login_as_a_maker_user(ACCOUNTSPAYABLE_VendorContracts.java:50) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) at io.cucumber.core.runner.TestStep.run(TestStep.java:64) </pre> | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <pre> at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:104) at io.cucumber.core.runner.Runner.runPickle(Runner.java:71) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$0(TestNGCucumberRunner.java:116) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:117) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:113) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:31) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:133) at org.testng.internal.TestInvoker.invokeMethod(TestInvoker.java:598) at org.testng.internal.TestInvoker.invokeTestMethod(TestInvoker.java:173) at org.testng.internal.MethodRunner.runInSequence(MethodRunner.java:46) at org.testng.internal.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:824) at org.testng.internal.TestInvoker.invokeTestMethods(TestInvoker.java:146) at org.testng.internal.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:146) at org.testng.internal.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:794) at org.testng.TestRunner.run(TestRunner.java:596) at org.testng.SuiteRunner.runTest(SuiteRunner.java:377) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:371) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:332) at org.testng.SuiteRunner.run(SuiteRunner.java:276) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:53) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:96) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1212) at org.testng.TestNG.runSuitesLocally(TestNG.java:1134) at org.testng.TestNG.runSuites(TestNG.java:1063) at org.testng.TestNG.run(TestNG.java:1031) at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115) at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251) at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77) </pre> <p>* Not displayable characters are replaced by '?'. </p> | | |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.222 s |
| | screenshot | | |
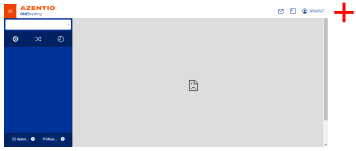
| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| |  | | |
| 2 | And user should navigate to accounts payable menu | SKIPPED | 0.000 s |
| 3 | Then Click on Good Recived Note GRN Eye buutton | SKIPPED | 0.000 s |
| 4 | And Click On Search Icon | SKIPPED | 0.000 s |
| 5 | And Update the data set id for creating Bill against cancelled GRN | SKIPPED | 0.001 s |
| 6 | And Enter the GRN status | SKIPPED | 0.000 s |
| 7 | Then Click on Table Row First Eye Icon in ARAP | SKIPPED | 0.000 s |
| 8 | And Get the Required Details | SKIPPED | 0.000 s |
| 9 | Then Click on Item Details | SKIPPED | 0.000 s |
| 10 | And Get PO Number | SKIPPED | 0.000 s |
| 11 | Then Open Invoice Bill Booking Eye icon | SKIPPED | 0.000 s |
| 12 | And Click Add icon button | SKIPPED | 0.000 s |
| 13 | Then Enter the Invoice Type | SKIPPED | 0.000 s |
| 14 | And Enter Business Partner Name | SKIPPED | 0.000 s |
| 15 | Then Enter Cost Center value | SKIPPED | 0.001 s |
| 16 | And Enter Supplier Referance Number | SKIPPED | 0.000 s |
| 17 | And Enter Flat Discount Invoice Amount | SKIPPED | 0.000 s |
| 18 | Then Give Mode of payment | SKIPPED | 0.000 s |
| 19 | And Save the Invoice Bill Record | SKIPPED | 0.000 s |
| 20 | Then Goto The Notification Icon | SKIPPED | 0.001 s |
| 21 | And Store the Referance Id and Open the Record | SKIPPED | 0.000 s |
| 22 | Then Click on AP Invoice Against PO Tab | SKIPPED | 0.000 s |
| 23 | And Enter The PO Number and Validate | SKIPPED | 0.001 s |

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Check creating Bill against cancelled
GRN is not allowed

(F) AR/AP Module

