

Cucumber Report

Mar 8, 2022, 9:43:55 PM

Start : Mar 08, 9:42:13.835 PM

End : Mar 08, 9:43:49.157 PM

Duration : 1 m 35.322 s

Features


Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0


PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 0
SKIPPED - 5

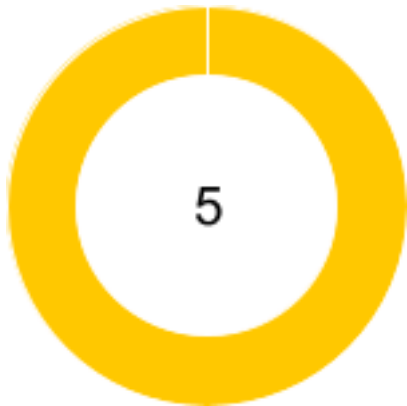





#	Feature Name	T	P	F	S	Duration
1	<u>FIXED ASSETS</u>	1	0	1	0	1 m 35.322 s

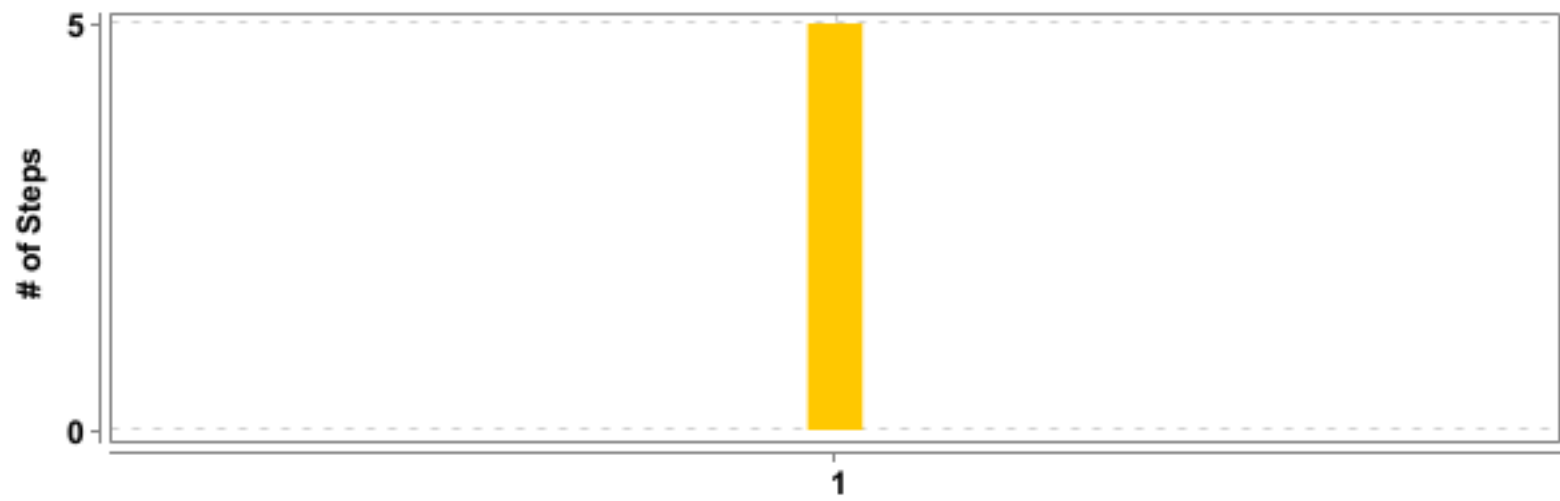



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>FIXED ASSETS</u>	<u>Check if the given asset is sold at higher price</u>	5	0	0	5	1 m 35.286 s

(F)- FIXED ASSETS

FAILED	DURATION - 1 m 35.322 s	Scenarios		Steps	
/ 9:42:13.835 PM // 9:43:49.157 PM /		Total - 1		Total - 5	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 5	

(S)- Check if the given asset is sold at higher price
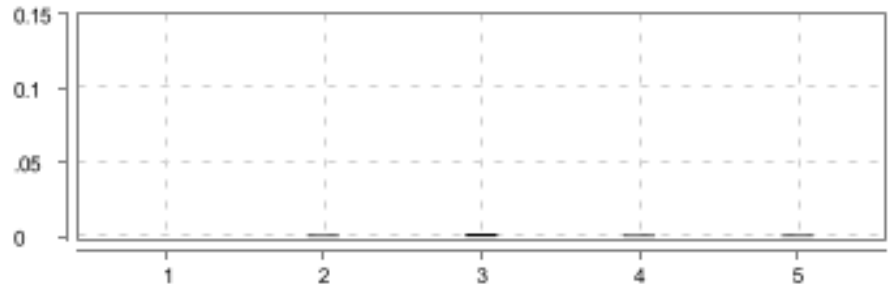
<div>FAILED</div> <div>DURATION - 1 m 35.286 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 5</div>	
/ 9:42:13.871 PM // 9:43:49.157 PM /				
FIXED ASSETS				
@KUBS_FAT_UAT_004_001				

#	Step / Hook Details	Status	Duration
	BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario) org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: unknown error: DevToolsActivePort file doesn't exist Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}, desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:84) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:62) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:244) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:166) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:89) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:99) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:86) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:41)	FAILED	1 m 35.132 s

#	Step / Hook Details	Status	Duration
	at resources.BaseClass.initializeDriver(BaseClass.java:28) at stepdefinitions.HooksClass.browserSetup(HooksClass.java:32)		
1	Given User should go to the kubs url and login as a maker user	SKIPPED	0.000 s
2	And user should navigate to fixed asset menu	SKIPPED	0.001 s
3	When click on eye button of asset sale	SKIPPED	0.002 s
4	Then click on first eye button to get the profit earned	SKIPPED	0.001 s
5	And maker should logout	SKIPPED	0.001 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.022 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.close()" because "this.driver" is null at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		