


FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	To check BudgetDefinition moduel feature	1	0	1	0	6 m 32.011 s

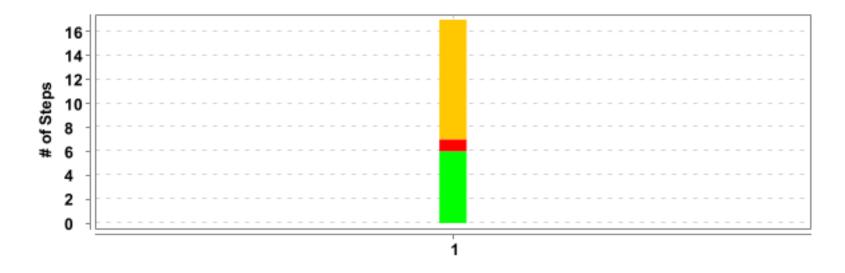


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	To check BudgetDefinition moduel	To verify maker can able to multiple budget code in auto auth	17	6	1	10	6 m 32.006 s
	<u>feature</u>						

DETAILED SECTION -- 4 --

(F)- To check BudgetDefinition moduel feature

FAILED	DURATION - 6 m 32.011 s	Scenarios		Steps	
		Total - 1		Total - 17	
/ 6:30:18.078 F	PM // 6:36:50.089 PM /	Pass - 0	1	Pass - 6	17
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 10	

(S)- To verify maker can able to multiple budget code in auto auth

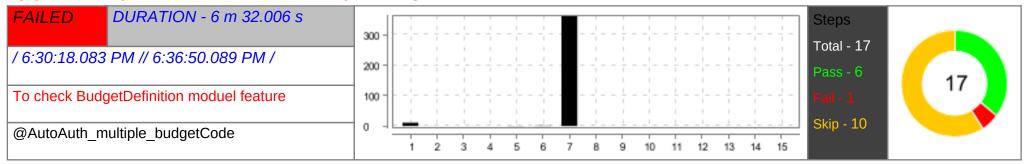

#	Step / Hook Details	Status	Duration
1	Given navigate to URL and login as a maker and choose finance option	PASSED	10.595 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.563 s
	screenshot		
	■ © restrictions The Control of		
2	Then click on budget configuration Menu	PASSED	0.079 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.191 s
	screenshot		

AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreensho	#	Step / Hook Details	Status	Duration
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot And click on add icon AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot FASSED AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Then create first budget code AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot FASSED AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Then select the record from notification AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Then select the record from notification AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED O.306 s		The control of the		
screenshot 4 And click on add icon AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) 5 Then create first budget code AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) Screenshot AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) PASSED 0.912 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) PASSED 0.306 s	3	And click on budget definition sub menu and click on eye icon	PASSED	0.141 s
And click on add icon AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then create first budget code AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClas		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.472 s
4 And click on add icon AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 5 Then create first budget code AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.306 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then create first budget code AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then create first budget code AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.246 s 0.749 s 0.302 s		© Marcon (1) (1) 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		
screenshot Then create first budget code AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) The select the record from notification AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.912 s PASSED 0.306 s	4	And click on add icon	PASSED	0.168 s
Then create first budget code AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then select the record from notification AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.749 s 0.302 s 0.302 s 0.302 s 0.303 s			PASSED	0.246 s
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 6 Then select the record from notification AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.302 s 0.302 s PASSED 0.912 s 0.306 s		0 marks		
Screenshot 6 Then select the record from notification AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.912 s 0.306 s	5	Then create first budget code	PASSED	0.749 s
6 Then select the record from notification AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.306 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.302 s
6 Then select the record from notification AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.912 s 0.306 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.306 s		0		
	6	Then select the record from notification	PASSED	0.912 s
screenshot		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.306 s
		screenshot	7	


#	Step / Hook Details	Status	Duration
	Part Part		
7 .	And approve approve the record	FAILED	6 m 2.353 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '1.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'IMMUVADP014584', ip: '10.1.47.109', os.name: 'Windows 10', os.arch: 'md64', os.version: '1.00', ava-version: '1.70.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command[5138e80584849880654964323302ff, findElement (using=xpath, value=#info: org.openqa.selenium.chrome.ChromeDriver Command[5138e8058484496054964323302ff, indElement (using=xpath, value=#info: org.openqa.selenium.chrome.ChromeDriver (promed) (abs. 45 (764c1bb2ab46, userDataDir: C.\UsersUNINDC-1AppData\LJ., goog:chromeOptions: (debuggerAddress: localhost:55387), javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), secdp: ws://localhost:55387/devtoosecdpVersion: 96.0.4664.45, secWindowRect true, strictFileInletractability false, timeouts: (implicit to, pageLoads: 300000), script: 300000, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true) Session ID: 3318e8058484a9b8d054b6d323c302ff at java-base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) at java-base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstanceO(elegatingConstructorAccessorImpl.java:77) at java-base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstanceO(elegatingConstructorAccessorImpl.java:45) at java-base/java-lang.reflect.Constructor.newInstanceO(mstructor.java:499) at java-base/java-lang.reflect.Constructor.newInstanceO(constructor.java:499) at java-base/java-lang.reflect.Constructor.newInstanceO(constructor.java:499) at java-base/java-lang.reflect.Constructor.newInstanceO(constructor.java:499) at org.openqa.selenium.remote.codec.w3c.W3CHtpResponseCodec.decode(W3CHtpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHtpResponse		

#	Step / Hook Details	Status	Duration
	at helper.WaitHelper.waitForElement(WaitHelper.java:79) at stepdefinitions.BUDGET_BudgetCreation.approve_approve_the_record(BUDGET_BudgetCreation.java:402) at ?.approve approve the record(file:///C:/Users/inindc00076/git/AzentioAutomationFramework2/AzentioAutomationFramework/src/test/java/features/KUBS_BudgetDefinition.feature:538) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	FAILED	12.208 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014584', ip: '10.1.47.109', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [bi318e8058484a9b8d05426323302ff, screenshot {}] Capabilities (acceptinsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45, seventheolitics} (abuggerAddress: localhost:55387), javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), sec.ody: ws:/localhost:55387/devtoo, sec.odyPorsion: 96.0.4664.45, setWindowRect: true, strictFielletteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:wirtualAuthenticators: true} Session ID: b318e805b484a9b8d054b6d323c302ff at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.cecode(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:33) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:139) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDri		
8	And click on budget definition sub menu and click on eye icon	SKIPPED	0.001 s
9	And click on add icon	SKIPPED	0.000 s
10	Then create second budget code	SKIPPED	0.001 s
11	Then select the record from notification	SKIPPED	0.000 s
12	And approve approve the record	SKIPPED	0.000 s
13	And click on budget definition sub menu and click on eye icon	SKIPPED	0.001 s
14	And click on add icon	SKIPPED	0.001 s
15	Then create Third budget code	SKIPPED	0.000 s
16	Then select the record from notification	SKIPPED	0.001 s

DETAILED SECTION -- 8 --

#	Step / Hook Details	Status	Duration
17	And approve approve the record	SKIPPED	0.001 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.240 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014584', ip: '10.1.47.109', os.name: Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [b318e805b484a9b8d054b6d323c302ff, close {}}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45} (76e4c1bb2ab46, userDataDir: C:\UsersININDC-1\AppDatalL}, goog:chromeOptions: {debuggerAddress: localhost:55387}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:55387/devtoo, se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: b318e805b484a9b8d054b6d323c302ff at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceConstructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.bHttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)	FAILED	0.240 s
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)		
	at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432)		
	at stepdefinitions.HooksClass.TearDown(HooksClass.java:50)		

EXPANDED SECTION --- 9 --

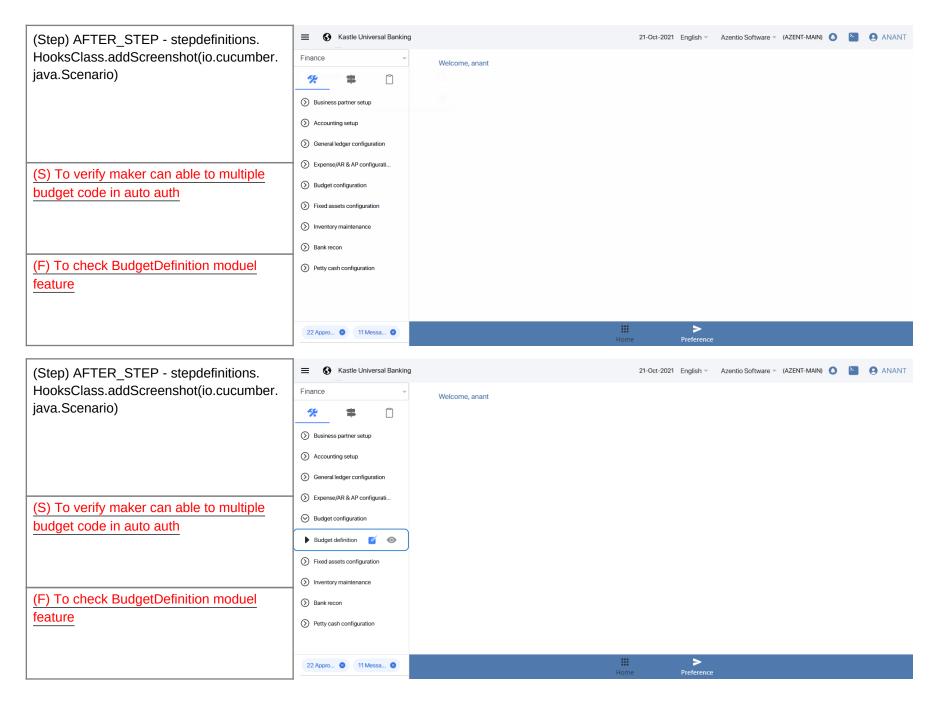

EXPANDED SECTION -- 10 --

