Cucumber Report

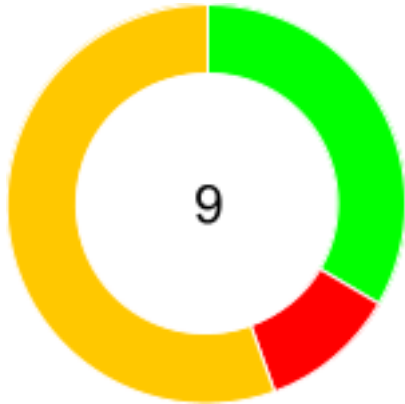| *Start : Mar 08, 10:59:52.130 AM*	*End : Mar 08, 11:00:29.802 AM*	*Duration : 37.672 s*
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 3 FAILED - 1 SKIPPED - 5

#	Feature Name	T	P	F	S	Duration
1	General Ledger2 Transaction	1	0	1	0	37.672 s
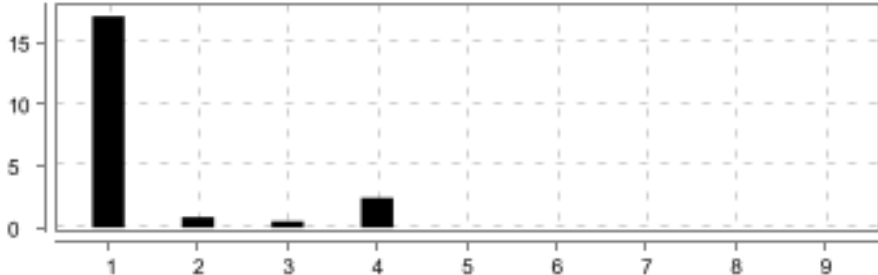
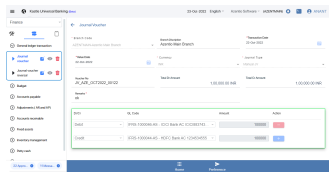| #	Feature Name	Scenario Name	T	P	F	S	Duration
1	General Ledger2 Transaction	Check the transactions as per GL number feeded	9	3	1	5	37.667 s
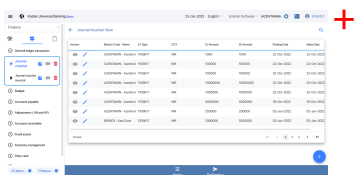
(F)- General Ledger2 Transaction

FAILED	DURATION - 37.672 s	Scenarios	
		Total - 1	
/ 10:59:52.130 AM // 11:00:29.802 AM /		Pass - 0	
		Fail - 1	1
		Skip - 0	

Steps	
Total - 9	
Pass - 3	9
Fail - 1	
Skip - 5	

(S)- Check the transactions as per GL number feeded

FAILED	DURATION - 37.667 s
/ 10:59:52.135 AM // 11:00:29.802 AM /	
General Ledger2 Transaction	
@KUBS_GL2_UAT_006_002 @Report	

Steps	
Total - 9	
Pass - 3	9
Fail - 1	
Skip - 5	

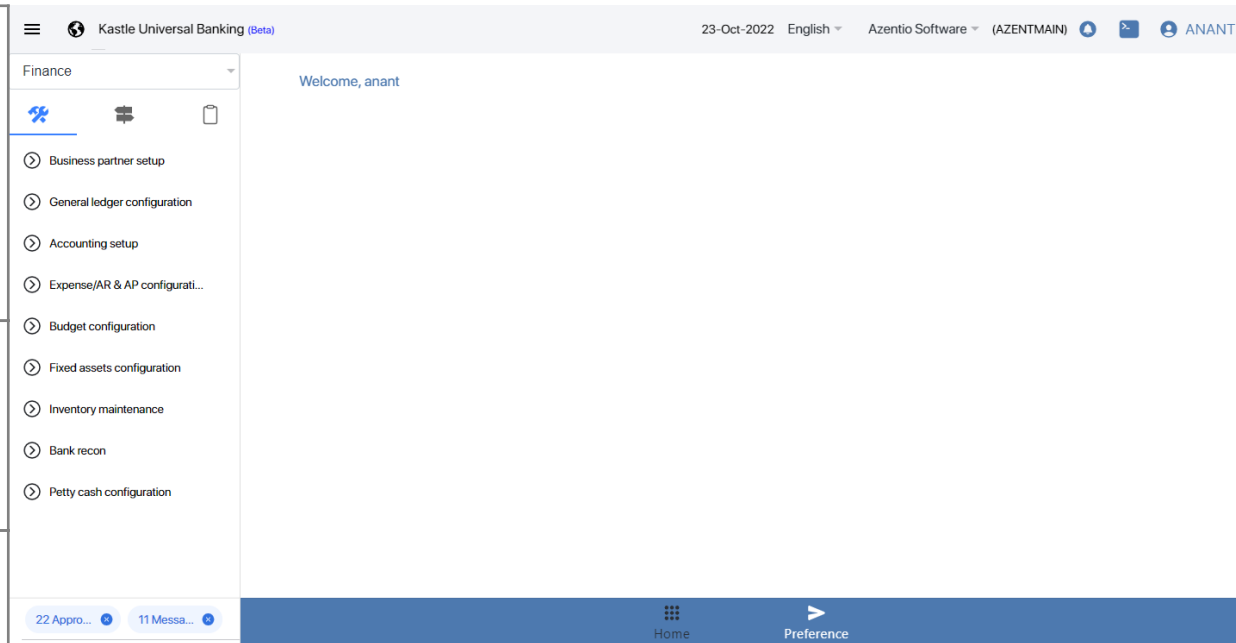| #	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	PASSED	17.109 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	1.166 s
	screenshot		
2	And user should navigate to general ledger transaction menu	PASSED	0.844 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.195 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	When click on eye button of journal voucher	PASSED	0.496 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.774 s
4	Then click on the record to get the GL number	FAILED	2.404 s

	org.openqa.selenium.JavascriptException: javascript error: Cannot read properties of undefined (reading 'value') (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [46bfb36a5b24bf47eb159ad0a46e4ac8, executeScript {script=return document.getElementsByClassName('datagrid-lov ng-untouched ng-pristine ng-star-inserted md select-disabled hydrated ion-star-inserted ion-untouched ion-pristine')[1].value, args=[]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:62052}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:62052/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 46bfb36a5b24bf47eb159ad0a46e4ac8
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	  at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:481)
	  at helper.JavascriptHelper.executeScript(JavascriptHelper.java:21)
	  at stepdefinitions.GeneralLedger2_JournalVoucher_Reports.		

#	Step / Hook Details	Status	Duration
	click_on_the_record_to_get_the_gl_number(GeneralLedger2_JournalVoucher_Reports.java:81) at ?.click on the record to get the GL number(file:///C:/Users/inindc00091/git/repository/Devesh_AzentioFramework/src/test/java/features/GeneralLedger2_JournalVoucher.feature:21) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.563 s
5	Then click on report icon	SKIPPED	0.000 s
6	Then click on enquiry menu	SKIPPED	0.001 s
7	Then click on temp grid button of financial transaction	SKIPPED	0.000 s
8	And fill the GL number field of financial transaction	SKIPPED	0.000 s
9	Then click on view button to view the report as per reference number	SKIPPED	0.000 s

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Check the transactions as per GL number feeded	
(F) General Ledger2 Transaction	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Check the transactions as per GL number feeded	
(F) General Ledger2 Transaction	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Check the transactions as per GL number feeded

(F) General Ledger2 Transaction

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Check the transactions as per GL number feeded

(F) General Ledger2 Transaction