
**Duration: 15.653 s** Start: Jan 09, 5:47:58.368 PM End: Jan 09, 5:48:14.021 PM Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 0 SKIPPED - 0 SKIPPED - 0 SKIPPED - 8 9 40 50 60 40 50 60 40 50 60 30 Pass % 70 30 Pass % 70 30 Pass % 70 20 20 20 80 80 80 90 90 100

FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	AR_AP Module	1	0	1	0	15.653 s

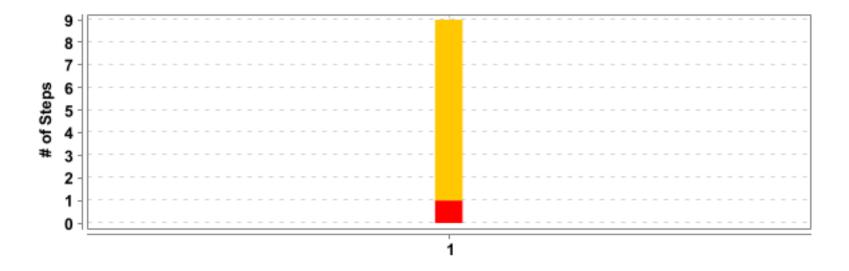


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	AR_AP Module	Verify download file is auto created basis the defined time	9	0	1	8	15.645 s
		and user is allowed to download the file.					

DETAILED SECTION -- 4 --

## (F)- AR\_AP Module

FAILED	DURATION - 15.653 s	Scenarios		Steps	
		Total - 1		Total - 9	
/ 5:47:58.368 PI	M // 5:48:14.021 PM /	Pass - 0	1	Pass - 0	9
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 8	

## (S)- Verify download file is auto created basis the defined time and user is allowed to download the file.

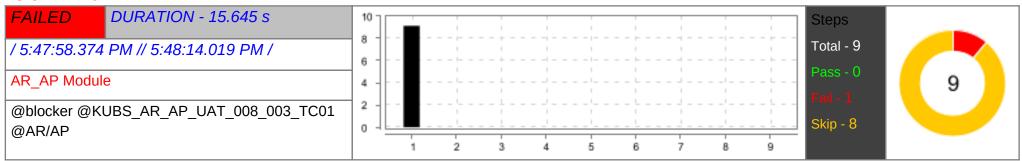

#	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	FAILED	9.120 s
	org.openqa.selenium.WebDriverException: unknown error: net::ERR_CONNECTION_REFUSED (Session info: chrome=108.0.5359.125) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.150', os.name: 'Windows 10', os. arch: 'amd64', os.version: '10.0', java.version: '17.0.4.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [b5ab288ec2d9328dc703e0f33018ebcc, get {url=http://172.27.78.245:6080/kubs-qc/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 108.0.5359.125, chrome: {chromedriverVersion: 108.0.5359.17 (1e0e3868ee06, userDataDir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:52747}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:52747/devtoo, se:cdpVersion: 108.0.5359.125, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: b5ab288ec2d9328dc703e0f33018ebcc at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:480) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:33) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		

DETAILED SECTION -- 5 --

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:326) at stepdefinitions.ACCOUNTSPAYABLE_VendorContracts. user_should_go_to_the_kubs_url_and_login_as_a_maker_user(ACCOUNTSPAYABLE_VendorContracts.java:48) at ?.User should go to the kubs url and login as a maker user(file:///C:/Users/ININDC00075/git/Arshath_Excel_AzentioAutomationFramework/ AzentioAutomationFramework_ARAP_Excel_Arshath/src/test/java/features/ArAp2.feature:857) * Not displayable characters are replaced by '?'.  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot  +	PASSED	0.392 s
2	And click on arap configuration main menu	SKIPPED	0.001 s
3	And click on payment file generation setup sub menu	SKIPPED	0.000 s
4	And user update the Excel sheet testdata for online payments	SKIPPED	0.000 s
5	And configure the file format as Payout wise	SKIPPED	0.000 s
6	And save the arap configure record	SKIPPED	0.000 s
7	And validate the saved record	SKIPPED	0.001 s
8	Then Click on Update Deposited Cheque Notification	SKIPPED	0.000 s
9	And Select and Submit the Update Deposited Cheque record1	SKIPPED	0.001 s

EXPANDED SECTION -- 6 --

(Step) AFTER\_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Verify download file is auto created basis the defined time and user is allowed to download the file.

(F) AR\_AP Module



## This site can't be reached

172.27.78.245 refused to connect.

Try:

- Checking the connection
- Checking the proxy and the firewall

ERR\_CONNECTION\_REFUSED



Details