

# Cucumber Report

9 Jan 2023, 8:19:50 PM

Start : Jan 09, 8:19:08.954 PM

End : Jan 09, 8:19:49.014 PM

Duration : 40.060 s

Features

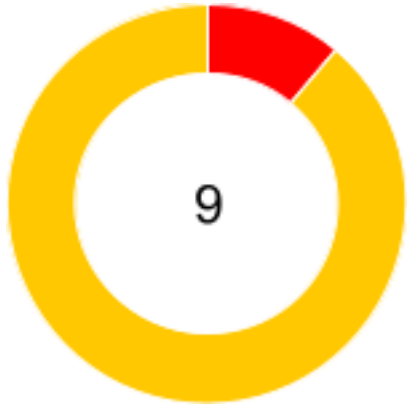
Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 1  
SKIPPED - 8







#	Feature Name	T	P	F	S	Duration
1	AR/AP Module	1	0	1	0	40.060 s

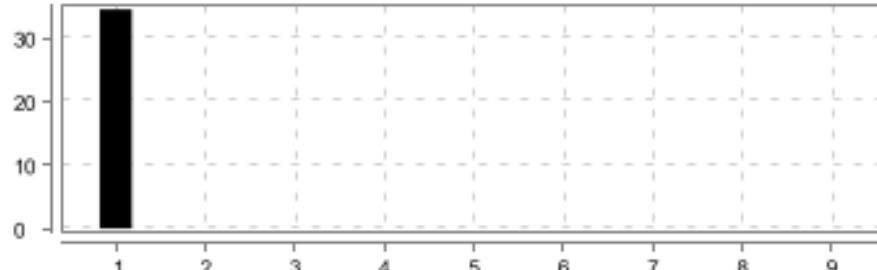



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	AR/AP Module	Verify status for the receipt is auto changed to Deposit	9	0	1	8	40.055 s


**(F)- AR/AP Module**

<b>FAILED</b>	<b>DURATION - 40.060 s</b>	Scenarios		Steps	
/ 8:19:08.954 PM // 8:19:49.014 PM /		Total - 1		Total - 9	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 8	

**(S)- Verify status for the receipt is auto changed to Deposit**

<div>FAILED</div> <div>DURATION - 40.055 s</div>			<div>Steps</div> <div>Total - 9</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 8</div>	
/ 8:19:08.959 PM // 8:19:49.014 PM /				
AR/AP Module				
@AR/AP @KUBS_AR_AP_UAT_010_002_TC_02_01				

#	Step / Hook Details	Status	Duration
1	<p>Given User should go to the kubs url and login as a maker user</p> <pre>org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"/p[contains(text(),'OTP')]} (Session info: chrome=108.0.5359.125) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.22', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [84b8a2866e4738bd79fe285edffac04f, findElement {using=xpath, value=/p[contains(text(),'OTP')]]] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 108.0.5359.125, chrome: {chromedriverVersion: 108.0.5359.71 (1e0e3868ee06..., userDataDir: C:\Users\ININDC~1\AppData\Local\Temp\chromeOptions: {debuggerAddress: localhost:50785}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se.cdp: ws://localhost:50785/devtools, se.cdpVersion: 108.0.5359.125, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 84b8a2866e4738bd79fe285edffac04f     at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)     at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)     at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)     at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)     at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)     at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)     at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)     at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)</pre>	<b>FAILED</b>	34.490 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy46.getText(Unknown Source) at stepdefinitions.KUBS_Login.loginToAzentioAppByMaker(KUBS_Login.java:44) at stepdefinitions.ACCOUNTSPAYABLE_VendorContracts. user_should_go_to_the_kubs_url_and_login_as_a_maker_user(ACCOUNTSPAYABLE_VendorContracts.java:47)   at ?.User should go to the kubs url and login as a maker user(file:///C:/Users/ININDC00091/git/AzentioAutomationFramework/ DeveshFW_Excel/ARAP_AzentioAutomationFramework_Excel/src/test/java/features/ArAp_2_Excel.feature:1051) * Not displayable characters are replaced by '?'. </pre>		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.622 s
	screenshot		
			
2	Then select data set ID for verify status of the receipt is auto changed to deposit	SKIPPED	0.005 s
3	And goto accouts Receivable module	SKIPPED	0.001 s
4	And goto accouts receipt module	SKIPPED	0.000 s
5	And click on Add Icon	SKIPPED	0.000 s
6	And fill the all receipt mendatory details	SKIPPED	0.000 s
7	And save the receipt record	SKIPPED	0.000 s
8	Then Click on Update Deposited Cheque Notification	SKIPPED	0.000 s
9	And Select and Submit the Update Deposited Cheque record	SKIPPED	0.000 s

(Step) AFTER\_STEP - stepdefinitions.  
HooksClass.addScreenshot(io.cucumber.  
java.Scenario)

(S) Verify status for the receipt is auto  
changed to Deposit

(F) AR/AP Module



**AZENTIO™**  
ONEBanking

User ID

1002435

Password

.....

OTP 650866

Your OTP will expired in : 33:20

Didn't get the code? [Resend](#)

[Sign In](#)

[Forgot password?](#)

[Don't have an account?](#)