Cucumber Report

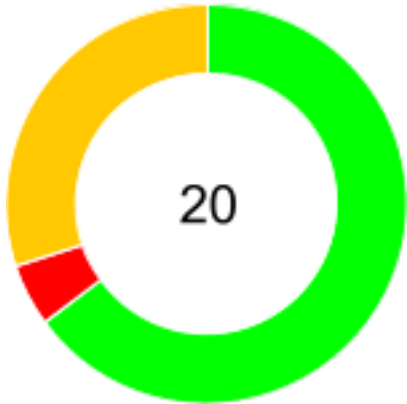| *Start : Feb 07, 6:51:42.819 PM*	*End : Feb 07, 6:57:09.534 PM*	*Duration : 5 m 26.715 s*
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 13 FAILED - 1 SKIPPED - 6

Features: 1

Scenarios: 1

Steps: 20

Pass % — Features: 0 %

Pass % — Scenarios: 0 %

Pass % — Steps: 65 %

#	Feature Name	T	P	F	S	Duration
1	*Check the Functionality of Inventory*	1	0	1	0	5 m 26.715 s
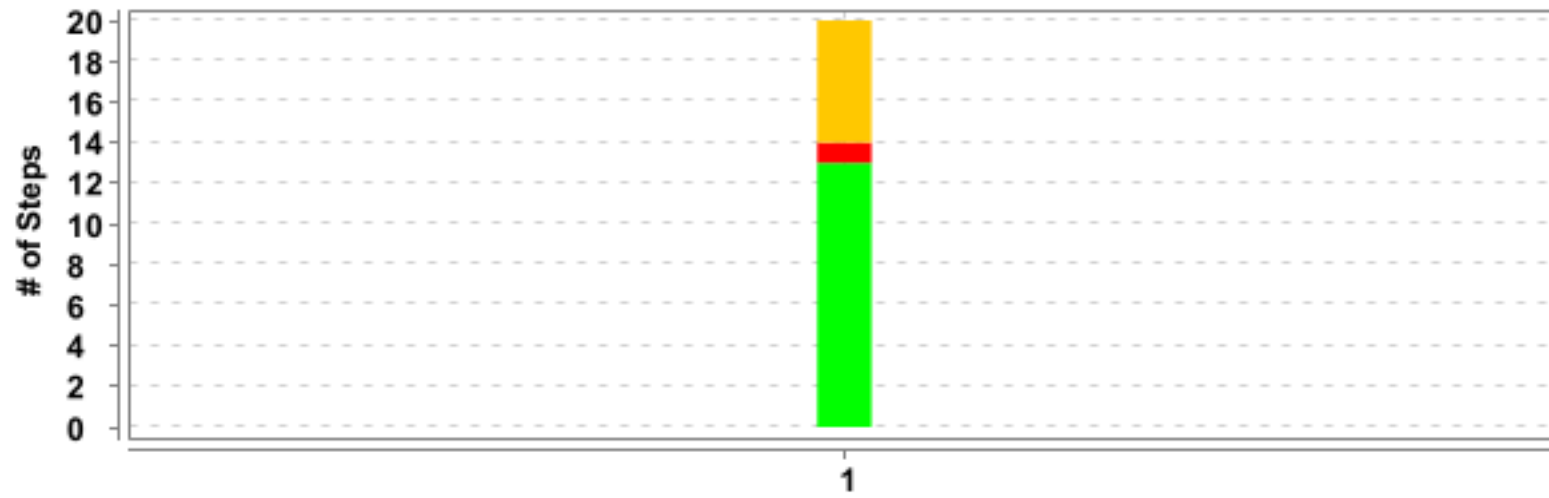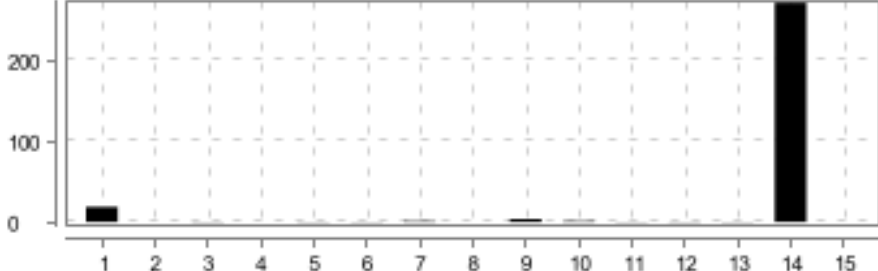
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the Functionality of Inventory	Create a GRN	20	13	1	6	5 m 26.691 s

(F)- Check the Functionality of Inventory
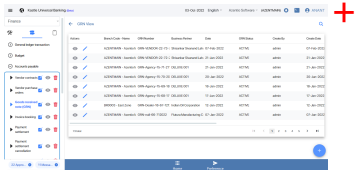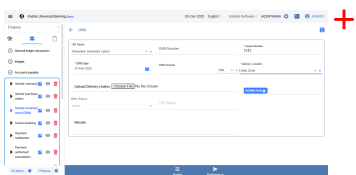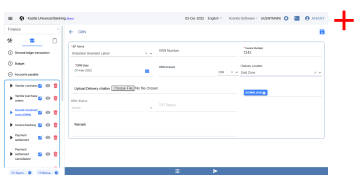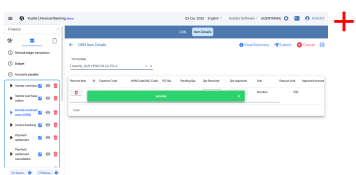
FAILED	DURATION - 5 m 26.715 s	Scenarios		Steps	
		Total - 1		Total - 20	
/ 6:51:42.819 PM // 6:57:09.534 PM /		Pass - 0		Pass - 13	
		Fail - 1	1	Fail - 1	20
		Skip - 0		Skip - 6	
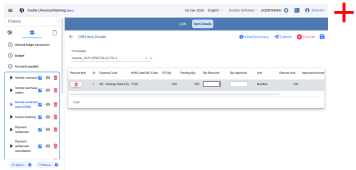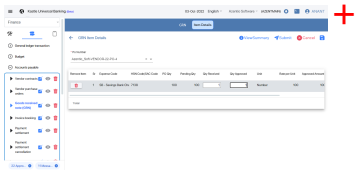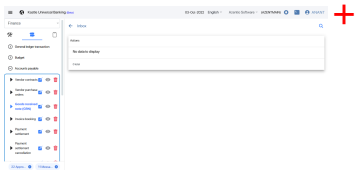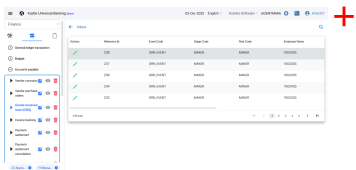
(S)- Create a GRN

FAILED	DURATION - 5 m 26.691 s		Steps	
/ 6:51:42.843 PM // 6:57:09.534 PM /			Total - 20	
Check the Functionality of Inventory			Pass - 13	
@KUBS_INV_MGMT_UAT_001_004			Fail - 1	20
			Skip - 6	

#	Step / Hook Details	Status	Duration
1	Given Navigate to URL and user should login as a maker	PASSED	18.789 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.652 s
	screenshot		
2	Then Click on Finance	PASSED	0.004 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.108 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	Then Click on Direction	PASSED	0.394 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.308 s
	screenshot		
4	Then Click on Accounts Payable	PASSED	0.117 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.152 s
	screenshot		
5	Then Click on Good Recived Note GRN Eye buutton	PASSED	0.501 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.378 s
	screenshot		
6	Then Click on Add button	PASSED	0.319 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.319 s
	screenshot		

#	Step / Hook Details	Status	Duration
7	Then Fill the form for GRN	PASSED	1.163 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.298 s
	screenshot		
8	Then Click on save button	PASSED	0.097 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.218 s
	screenshot		
9	Then Select PO Number	PASSED	3.481 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.178 s
	screenshot		
10	Then Add qty received qty approved	PASSED	1.414 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.122 s
	screenshot		

#	Step / Hook Details	Status	Duration
11	Then Click on GRN item save button	PASSED	0.257 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.136 s
	screenshot		
12	Then Click on Notification button	PASSED	0.281 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.488 s
	screenshot		
13	And Select record which we saved	PASSED	0.389 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.385 s
	screenshot		
14	And Submit the record	FAILED	4 m 31.173 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014667', ip: '10.1.47.117', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d8247fffb821e6f6fd17b1dc1b4e7dda, findElement {using=xpath, value=//ion-textarea/div/textarea[@name='remarks']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L.		

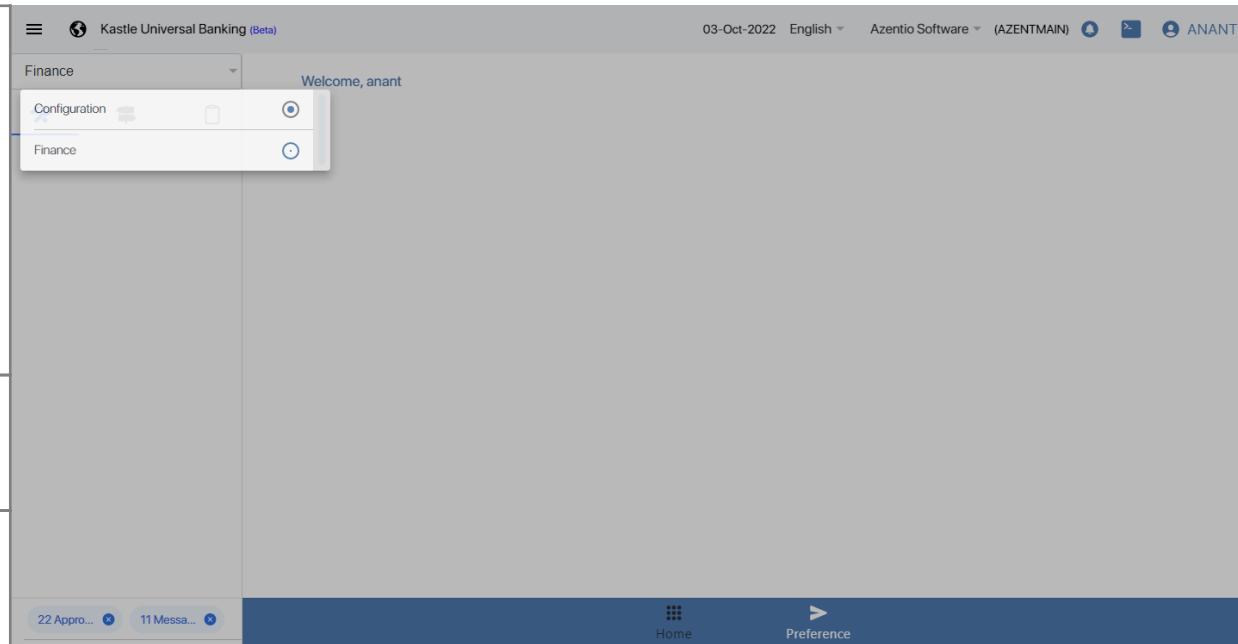| #	Step / Hook Details	Status	Duration

	..}, goog:chromeOptions: {debuggerAddress: localhost:61898}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:61898/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: d8247fffb821e6f6fd17b1dc1b4e7dda
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	    at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	    at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373)
	    at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70)
	    at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39)
	    at jdk.proxy2/jdk.proxy2.$Proxy46.isDisplayed(Unknown Source)
	    at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:307)
	    at org.openqa.selenium.support.ui.ExpectedConditions.access$000(ExpectedConditions.java:40)
	    at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:293)
	    at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:290)
	    at org.openqa.selenium.support.ui.ExpectedConditions$23.apply(ExpectedConditions.java:660)
	    at org.openqa.selenium.support.ui.ExpectedConditions$23.apply(ExpectedConditions.java:656)
	    at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:208)
	    at helper.WaitHelper.waitForElement(WaitHelper.java:79)
	    at stepdefinitions.InventoryManagament.submit_the_record(InventoryManagament.java:197)
	    at ?.Submit the record(file:///C:/Users/inindc00082/git/repository2/Tushar_AzentioFramework/src/test/java/features/InventoryManagement.feature:49)
	* Not displayable characters are replaced by '?'.		

	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	FAILED	12.074 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014667', ip: '10.1.47.117', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d8247fffb821e6f6fd17b1dc1b4e7dda, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:61898}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy:		

#	Step / Hook Details	Status	Duration

	Proxy(), se:cdp: ws://localhost:61898/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: d8247fffb821e6f6fd17b1dc1b4e7dda
	
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)
	    at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347)
	    at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		

15	Then Open Reviewer account	SKIPPED	0.001 s
16	And Click on notification	SKIPPED	0.000 s
17	Then Approve the record which we submitted from maker stage	SKIPPED	0.001 s
18	Then Go to Checker account	SKIPPED	0.000 s
19	And Clam the record	SKIPPED	0.000 s
20	Then Click on notification and approve the record	SKIPPED	0.001 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.240 s

	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014667', ip: '10.1.47.117', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [d8247fffb821e6f6fd17b1dc1b4e7dda, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:61898}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:61898/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: d8247fffb821e6f6fd17b1dc1b4e7dda
	
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)		
	at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432)		
	at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a GRN

(F) Check the Functionality of Inventory

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a GRN

(F) Check the Functionality of Inventory

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Create a GRN	
(F) Check the Functionality of Inventory	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Create a GRN	
(F) Check the Functionality of Inventory	

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a GRN

(F) Check the Functionality of Inventory

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a GRN

(F) Check the Functionality of Inventory

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Create a GRN	
(F) Check the Functionality of Inventory	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Create a GRN	
(F) Check the Functionality of Inventory	

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a GRN

(F) Check the Functionality of Inventory

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a GRN

(F) Check the Functionality of Inventory

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a GRN

(F) Check the Functionality of Inventory

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a GRN

(F) Check the Functionality of Inventory

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a GRN

(F) Check the Functionality of Inventory