


FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	ACCOUNTS PAYABLE	1	0	1	0	52.491 s

SCENARIOS SUMMARY

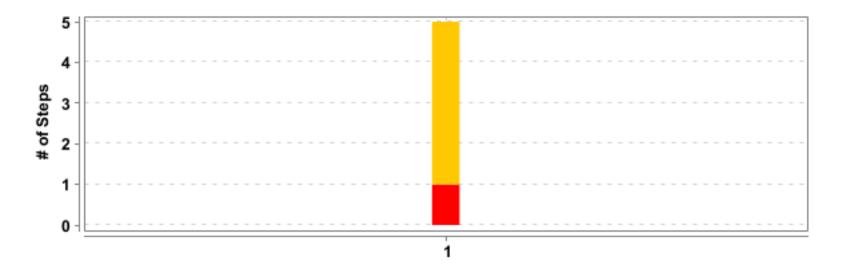

-- 3 --


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	ACCOUNTS PAYABLE	Create a contract	5	0	1	4	52.484 s

DETAILED SECTION -- 4 --

## (F)- ACCOUNTS PAYABLE

FAILED	DURATION - 52.491 s	Scenarios		Steps	
		Total - 1		Total - 5	
/ 12:29:22.701 A	AM // 12:30:15.192 AM /	Pass - 0	1	Pass - 0	5
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 4	

## (S)- Create a contract

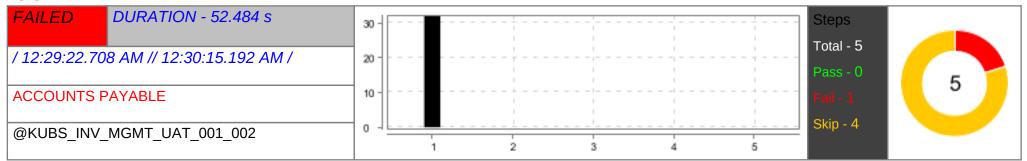

#	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	FAILED	31.974 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [93fb34f32880298d3ab51f496f7f6ffc, findElement (using=xpath, value=//ion-title[contains(text(),'Welcome,')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46, userDataDir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:56252}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:56252/devtoo, se:cdp/version: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 93fb34f32880298d3ab51f496f7f6ffc at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		

#	Step / Hook Details	Status	Duration
#	At org.openqa.selenium.remote.BttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at org.openqa.selenium.support.pagefactory.DefaultElementLocation.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy46.isDisplayed(Unknown Source) at org.openqa.selenium.support.ui.ExpectedConditions.element!fVisible(ExpectedConditions.java:307) at org.openqa.selenium.support.ui.ExpectedConditions.element!fVisible(ExpectedConditions.java:307) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:293) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:290) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java	Status	Duration
	java/features/ACCOUNTSPAYABLE_VendorContracts.feature:6)  * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	FAILED	12.210 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [93fb34f32880298d3ab51f496f7f6ffc, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46, userDataDir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:56252}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:56252/devtoo, se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:virtualAuthenticators: true} Session ID: 93fb34f32880298d3ab51f496f7f6ffc at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		

DETAILED SECTION -- 6 --

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347) at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		
2	And user should navigate to accounts payable menu	SKIPPED	0.000 s
3	When click on eye button of vendor contract	SKIPPED	0.000 s
4	And click on add button to create contract	SKIPPED	0.001 s
5	And Fill the required fields to create contract	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)  org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [93fb34f32880298d3ab51f496f7f6ffc, close f] Capabilities (acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: (chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46, userDataDir: C:\Users\ININDC=1\AppDataL\), goog:chromeOptions: (debuggerAddress: localhost:56252), javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:56252/devtoo, se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true) Session ID: 93fb34f32880298d3ab51496f7f6ffc  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)  at java.base/java.lang.reflect.Constructor.newInstance(WithCaller(Constructor.java:480)  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:139)  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommand	FAILED	0.059 s