Cucumber Report

Start : Jan 14, 12:10:06.968 AM	**End : Jan 14, 12:10:23.911 AM**	**Duration : 16.943 s**
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 6 FAILED - 1 SKIPPED - 1

Features: 1

Scenarios: 1

Steps: 8

Features Pass %: 0 %

Scenarios Pass %: 0 %

Steps Pass %: 75 %

#	Feature Name	T	P	F	S	Duration
1	*Checking the Supplementary Budget functionality*	1	0	1	0	16.943 s
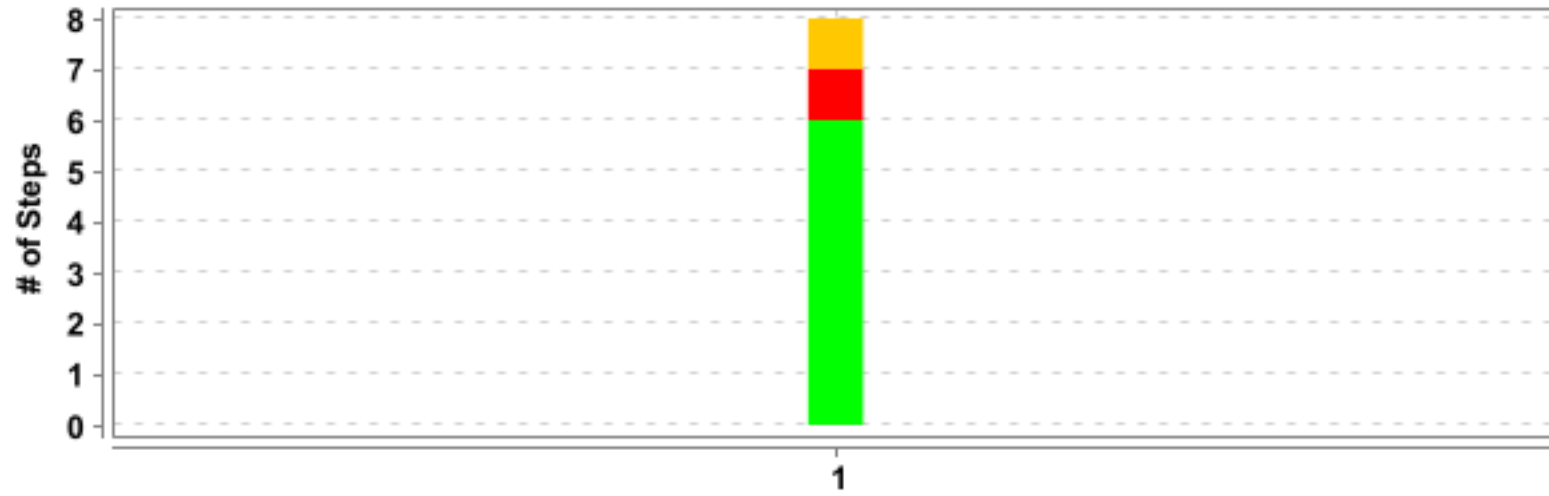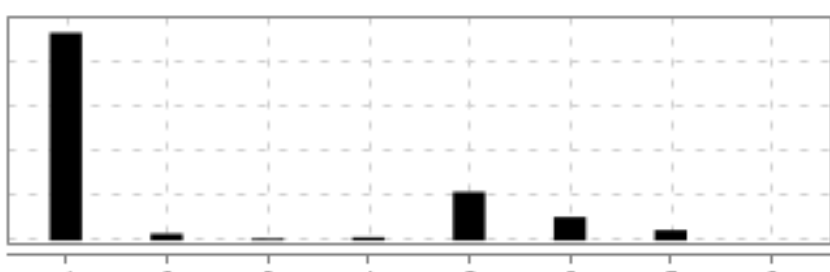
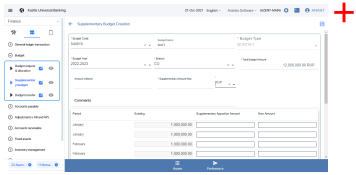| #	Feature Name	Scenario Name	T	P	F	S	Duration
1	Checking the Supplementary Budget functionality	User should be able to raise supplementary request for Monthly budget	8	6	1	1	16.940 s

(F)- Checking the Supplementary Budget functionality

FAILED	DURATION - 16.943 s	Scenarios		Steps	
/ 12:10:06.968 AM // 12:10:23.911 AM /		Total - 1		Total - 8	
		Pass - 0	1	Pass - 6	8
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 1	
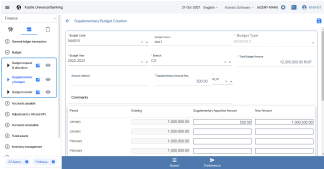
(S)- User should be able to raise supplementary request for Monthly budget

FAILED	DURATION - 16.940 s		Steps	
/ 12:10:06.971 AM // 12:10:23.911 AM /			Total - 8	
Checking the Supplementary Budget functionality			Pass - 6	8
@SupplementaryBudget_BP_SB_08_02			Fail - 1	
			Skip - 1	

#	Step / Hook Details	Status	Duration
1	Given maker should navigate to the url and login with valid credentials	PASSED	9.339 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.226 s
	screenshot		
2	And maker should navigate to the budget module	PASSED	0.308 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.190 s
	screenshot		

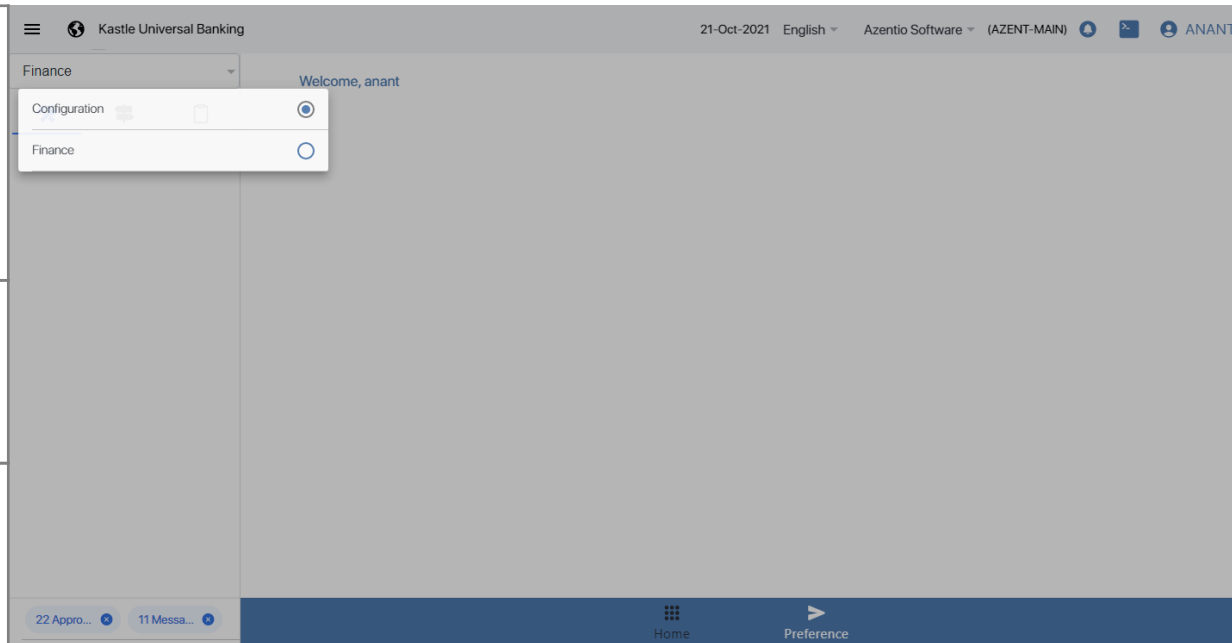| #	Step / Hook Details	Status	Duration
3	And maker click on budget field	PASSED	0.093 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.111 s
	screenshot		
4	When maker click on budget supplementary eye icon	PASSED	0.145 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.139 s
	screenshot		
5	And click on add button on budget supplementary view page	PASSED	2.180 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.171 s
	screenshot		
6	Then fill required data	PASSED	1.058 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.122 s
	screenshot		

#	Step / Hook Details	Status	Duration
7	Then fill apportion amount	FAILED	0.468 s

	org.openqa.selenium.JavascriptException: javascript error: Cannot read properties of null (reading 'shadowRoot') (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os. name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [eb2df68d7546957736979bef64554a75, executeScript {script=return document.querySelector("ion-toast").shadowRoot. querySelector("div[class='toast-message']").innerText, args=[]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L. ..}, goog:chromeOptions: {debuggerAddress: localhost:61895}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:61895/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: eb2df68d7546957736979bef64554a75
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	    at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:481)
	    at helper.JavascriptHelper.executeScript(JavascriptHelper.java:21)
	    at stepdefinitions.BUDGET_SupplementaryBudget.fill_apportion_amount(BUDGET_SupplementaryBudget.java:472)
	    at ?.fill apportion amount(file:///C:/Users/inindc00089/eclipse-workspace/AzentioAutomationFramework2/src/test/java/features/BUDGET_SupplementaryBudget.feature:93)
	* Not displayable characters are replaced by '?'.		

	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.116 s
	screenshot		

#	Step / Hook Details	Status	Duration
8	Then validate maker can save request for the monthly budget	SKIPPED	0.000 s

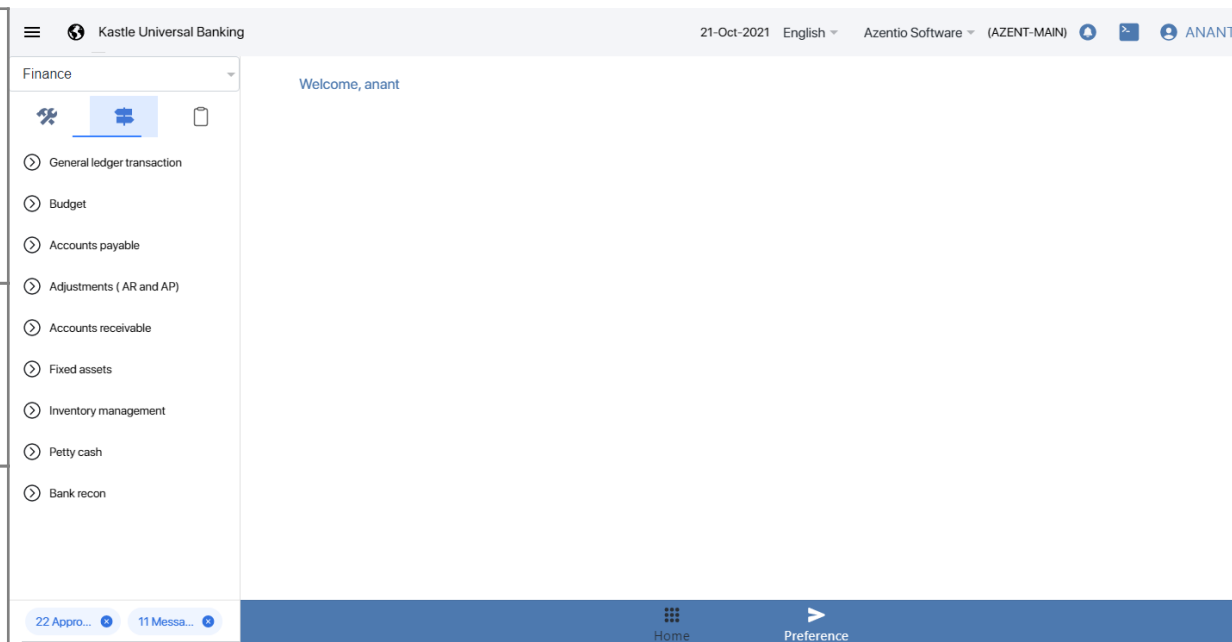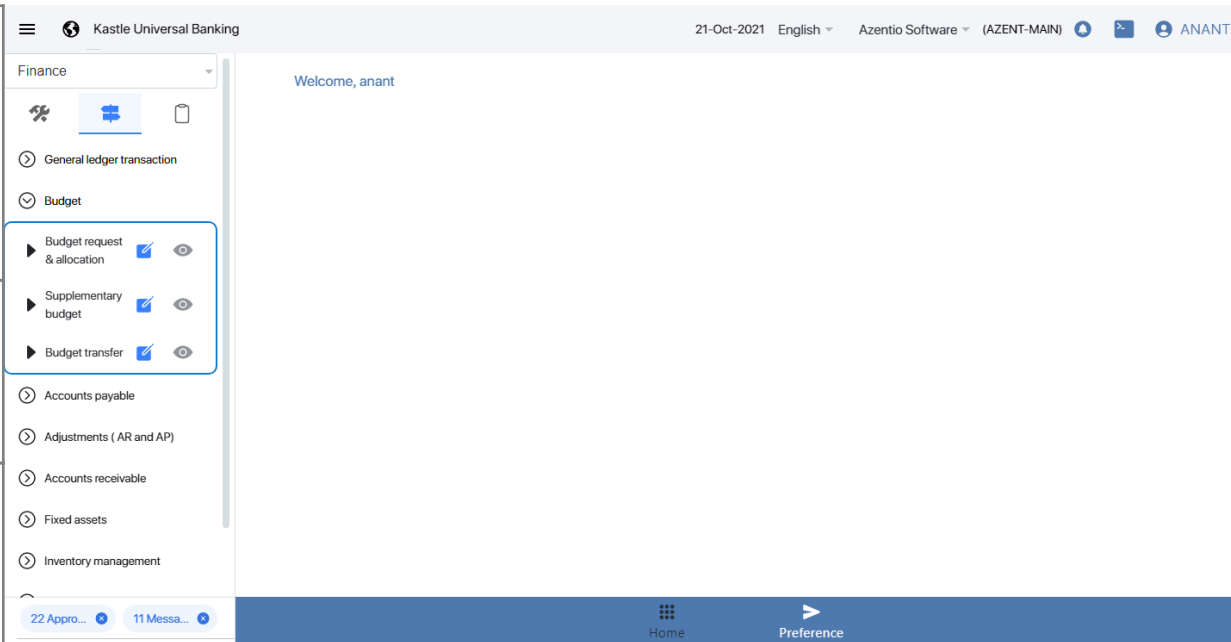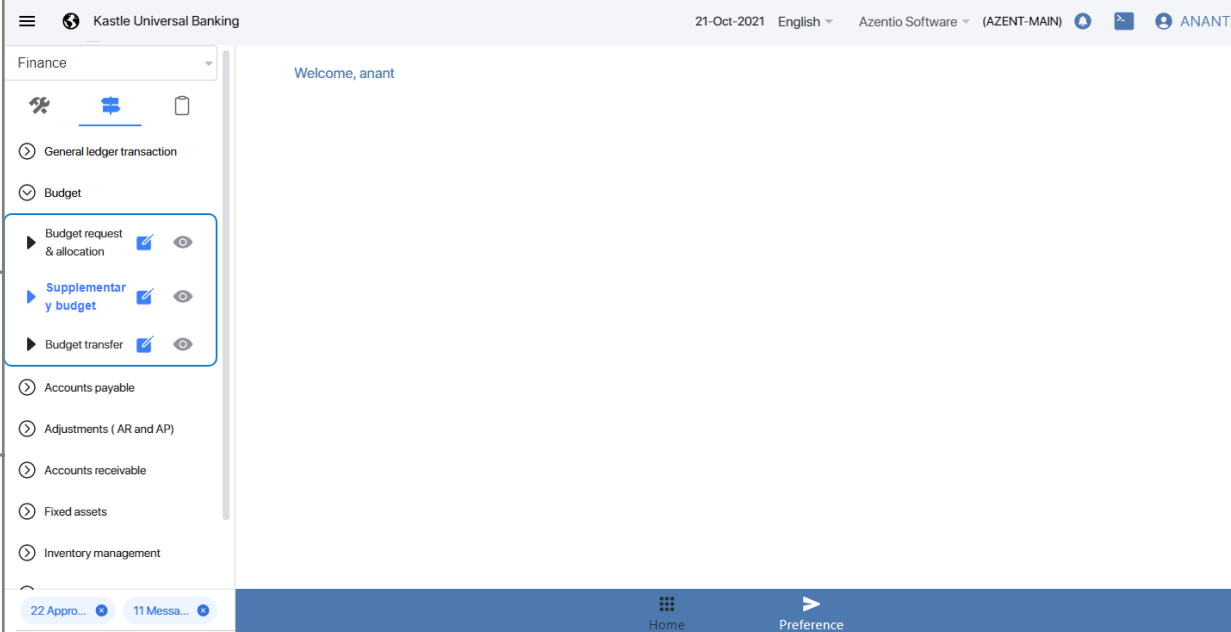|	
(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) User should be able to raise supplementary request for Monthly budget	
(F) Checking the Supplementary Budget functionality	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) User should be able to raise supplementary request for Monthly budget	
(F) Checking the Supplementary Budget functionality	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) User should be able to raise supplementary request for Monthly budget	
(F) Checking the Supplementary Budget functionality	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) User should be able to raise supplementary request for Monthly budget	
(F) Checking the Supplementary Budget functionality	

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) User should be able to raise
supplementary request for Monthly budget

(F) Checking the Supplementary Budget
functionality

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) User should be able to raise
supplementary request for Monthly budget

(F) Checking the Supplementary Budget
functionality

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) User should be able to raise supplementary request for Monthly budget

(F) Checking the Supplementary Budget functionality