

FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	Check the Functionality of the GL1 Module	1	0	1	0	23.775 s



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the Functionality of the GL1	Check the created already and trying to create same	8	7	1	0	23.767 s
	Module	accounting book					

DETAILED SECTION -- 4 --

(F)- Check the Functionality of the GL1 Module

FAILED	DURATION - 23.775 s	Scenarios		Steps	
		Total - 1		Total - 8	
/ 12:51:41.433 p	m // 12:52:05.208 pm /	Pass - 0	1	Pass - 7	8
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 0	

(S)- Check the created already and trying to create same accounting book

FAILED	DURATION - 23.767 s	15										Steps	
/ 12:51:41.4	41 pm // 12:52:05.208 pm /	10 -	-									Total - 8	
Check the Fu	unctionality of the GL1 Module	5	-									Pass - 7 Fail - 1	8
@KUBS GL	UAT 002 002	0 -		<u> </u>								Skip - 0	
				1	2	3	4	5	6	7	8		

#	Step / Hook Details	Status	Duration
1	Given Navigate to Azentio Kubs	PASSED	14.973 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.178 s
	screenshot		
	■ Particularity State State		
2	And Click on Accounting Setup module	PASSED	0.107 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.156 s
	screenshot		


AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) APASSED 4 And Click on Add icon AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) Screenshot 5 Then Choose the Template Type of Custom Template AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) Screenshot AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario)	#	Step / Hook Details	Status	Duration
AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 4 And Click on Add icon AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 5 Then Choose the Template Type of Custom Template AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 4 And Enter Another Book Name AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED O.266 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED O.223 s		The control of the		
screenshot And Click on Add icon AftER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) Screenshot Then Choose the Template Type of Custom Template AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) Screenshot AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) PASSED 0.266 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) PASSED 0.223 s	3	-	PASSED	
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Then Choose the Template Type of Custom Template AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.266 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.223 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.349 s
And Click on Add icon AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then Choose the Template Type of Custom Template AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.266 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.223 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 5 Then Choose the Template Type of Custom Template AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 6 And Enter Another Book Name AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.344 s 0.344 s 0.344 s				
screenshot Then Choose the Template Type of Custom Template AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot And Enter Another Book Name AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) ARSED 0.266 s PASSED 0.223 s	4	And Click on Add icon	PASSED	0.572 s
5 Then Choose the Template Type of Custom Template AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot And Enter Another Book Name AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.266 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.223 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.344 s
5 Then Choose the Template Type of Custom Template AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 6 And Enter Another Book Name AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.266 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.223 s		screenshot]	
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 6 And Enter Another Book Name AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.183 s PASSED 0.266 s PASSED 0.223 s				
Screenshot 6 And Enter Another Book Name AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.266 s 0.223 s	5	Then Choose the Template Type of Custom Template	PASSED	0.457 s
6 And Enter Another Book Name AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.266 s 0.223 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.183 s
6 And Enter Another Book Name AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.266 s 0.223 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.223 s		O		
	6	And Enter Another Book Name	PASSED	0.266 s
screenshot		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.223 s
		screenshot	1	


#	Step / Hook Details	Status	Duration
	No. 201 April No. 201 Apri		
7	Then Enter the Remark	PASSED	0.214 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.206 s
	screenshot		
	* * O AND TOTAL TOTAL OF THE STATE OF THE ST		
8	Then Validate the Message we get	FAILED	0.100 s
	org.openqa.selenium.JavascriptException: javascript error: Cannot read properties of null (reading 'shadowRoot') (Session info: chrome=101.0.4951.54) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014547', ip: '10.1.47.111', os. name: Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [a250789de5ac587d2369871346d6c0cf, executeScript (script=return document.querySelector('ion-toast').shadowRoot. querySelector('div[class=toast-message]'), args=[j]] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 101.0.4951.41 (93c720db8323, userDataDir. C:Users\NININDC-1\AppDataL), goog:chromeOptions: {debuggerAddress: localhost:54959}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:54959/devtoo, se:cdpVersion: 101.0.4951.54, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: a250789de5ac587d2369871346d6c0cf at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:490) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.enteveCommandExecutor.java:164) at org.openqa.selenium.remote.enteveCommandExecutor.invokeExecute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.service.DriverCommand		

DETAILED SECTION -- 7 --


#	Step / Hook Details	Status	Duration
	at ?.Validate the Message we get(file:///C:/Users/inindc00075/git/AzentioAutomationFramework/AzentioAutomationFramework/src/test/java/features/GL1_UAT.feature:87) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot	PASSED	0.147 s
	1		

EXPANDED SECTION --- 8 --

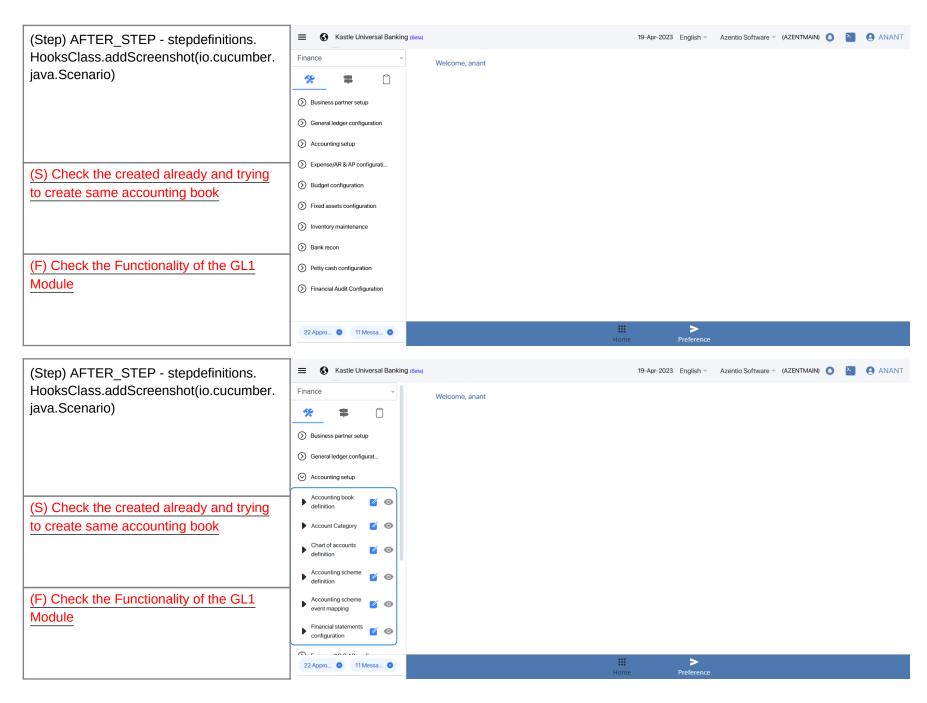

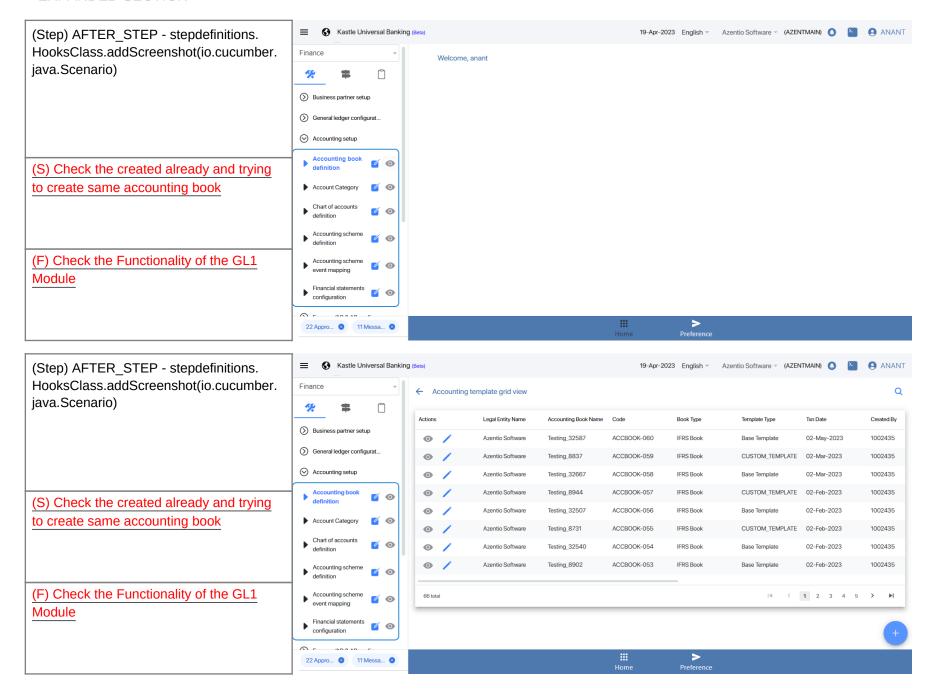

EXPANDED SECTION -- 10 --

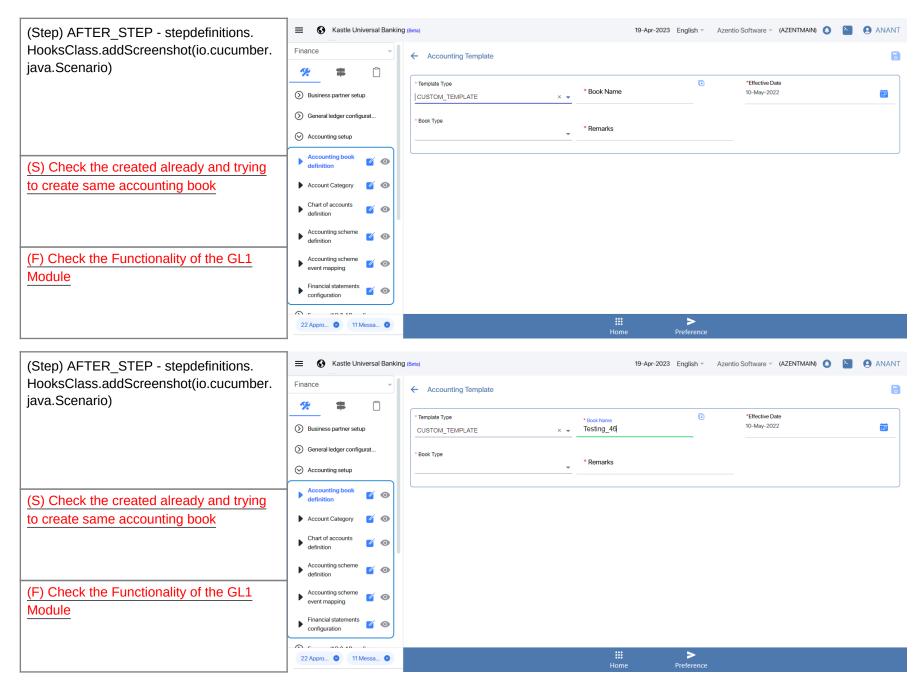

EXPANDED SECTION -- 11 --

