Cucumber Report

Start : Jan 14, 12:54:29.648 PM	**End : Jan 14, 12:55:17.719 PM**	**Duration : 48.071 s**
Features	Scenarios	Steps
PASSED - 1 FAILED - 0 SKIPPED - 0	PASSED - 1 FAILED - 0 SKIPPED - 0	PASSED - 5 FAILED - 0 SKIPPED - 0

#	Feature Name	T	P	F	S	Duration
1	user create login in to Budget and planning UAT files	1	1	0	0	48.071 s
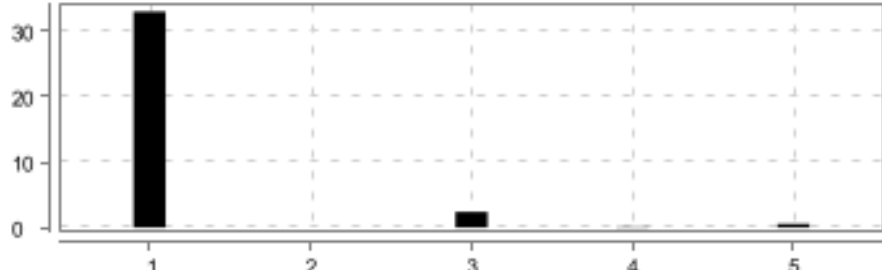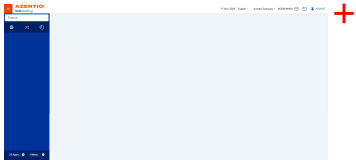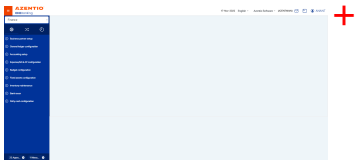
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	*user create login in to Budget and planning UAT files*	*user login to maker*	5	5	0	0	48.064 s
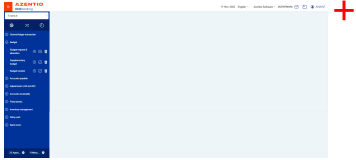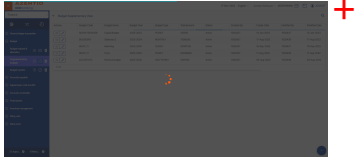
(F)- user create login in to Budget and planning UAT files

PASSED	DURATION - 48.071 s	Scenarios		Steps	
/ 12:54:29.648 PM // 12:55:17.719 PM /		Total - 1 Pass - 1 Fail - 0 Skip - 0	1	Total - 5 Pass - 5 Fail - 0 Skip - 0	5
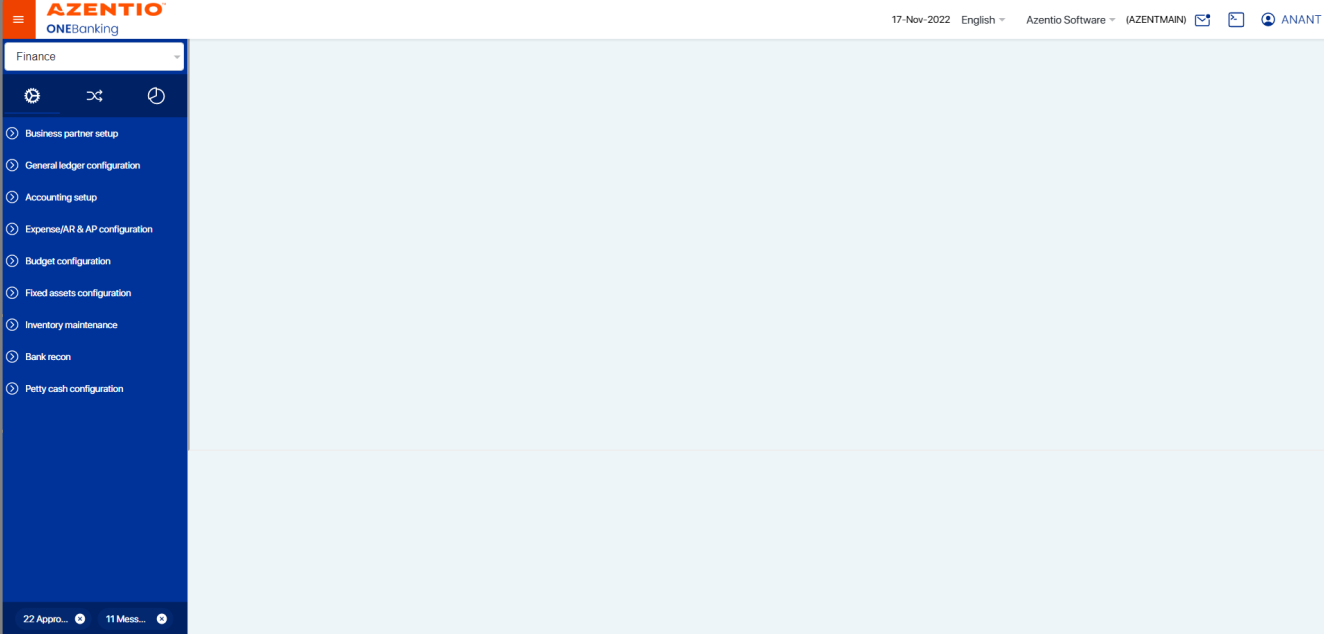
(S)- user login to maker

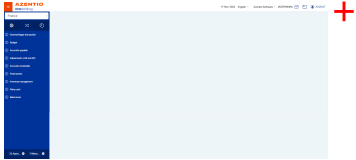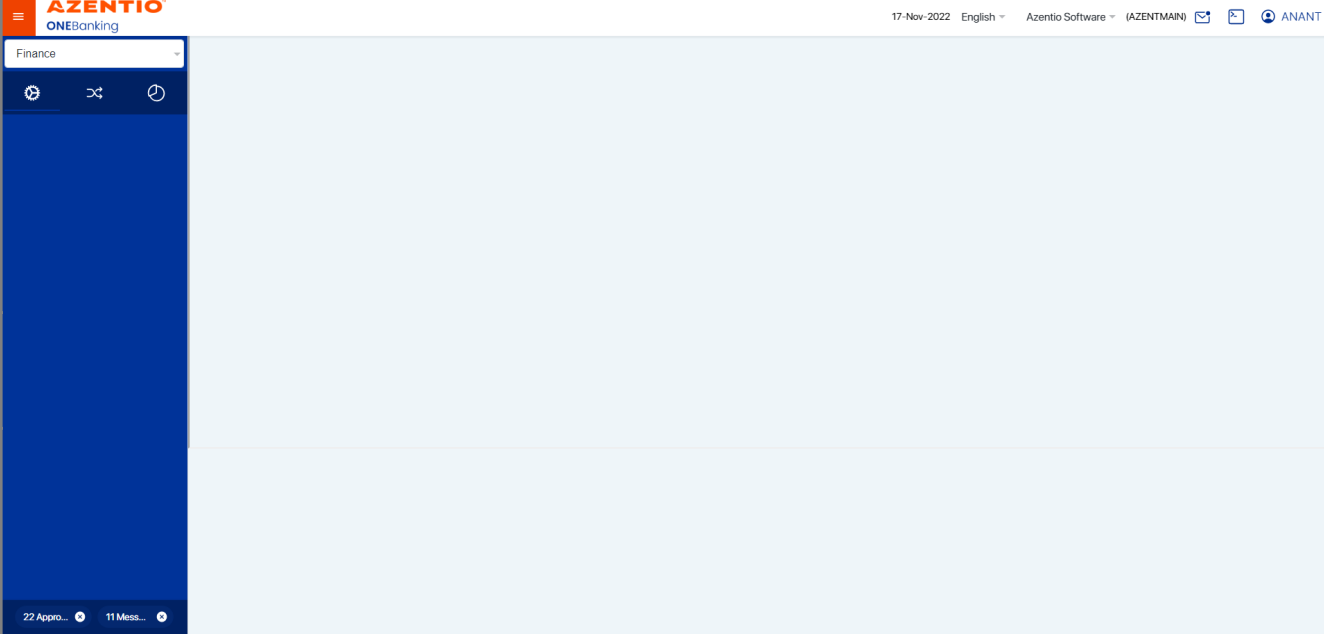| PASSED	DURATION - 48.064 s		Steps	
/ 12:54:29.655 PM // 12:55:17.719 PM /			Total - 5 Pass - 5 Fail - 0 Skip - 0	5
user create login in to Budget and planning UAT files				
@KUBS_BP_UAT_005_005_4				

#	Step / Hook Details	Status	Duration
1	Given navigate to given url and login with maker credentials	PASSED	33.003 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	1.076 s
	screenshot		
2	And user update the Excel sheet testdata for Budget and planning Allocation5	PASSED	0.007 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.345 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	And maker should navigate to the budget module UAT	PASSED	2.396 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.302 s
	screenshot		
4	And maker click on budget field UAT	PASSED	0.119 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.222 s
	screenshot		
5	When maker click on budget supplementary eye icon UAT	PASSED	0.539 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.771 s
	screenshot		

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) user login to maker

(F) user create login in to Budget and planning UAT files
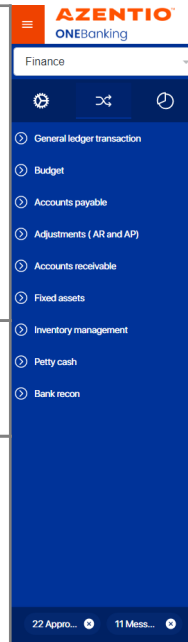

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) user login to maker

(F) user create login in to Budget and planning UAT files

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) user login to maker

(F) user create login in to Budget and
planning UAT files

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
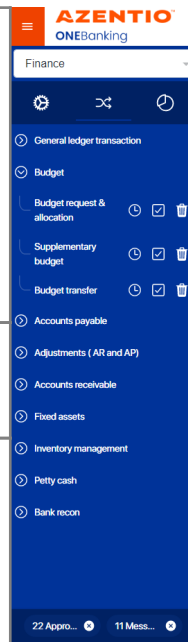java.Scenario)

(S) user login to maker

(F) user create login in to Budget and
planning UAT files

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) user login to maker

(F) user create login in to Budget and
planning UAT files