Cucumber Report

| Start : Feb 28, 1:13:55.822 pm	End : Feb 28, 1:14:23.048 pm	Duration : 27.226 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 11 FAILED - 1 SKIPPED - 0
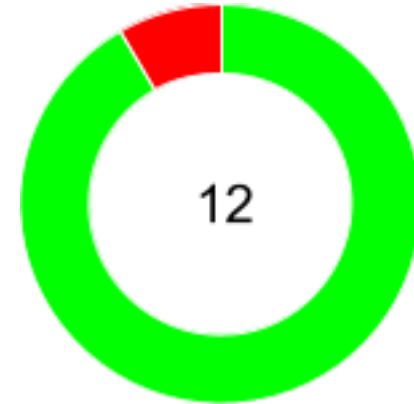
#	Feature Name	T	P	F	S	Duration
1	_Check the Functionality of AR/AP Module_	1	0	1	0	27.226 s
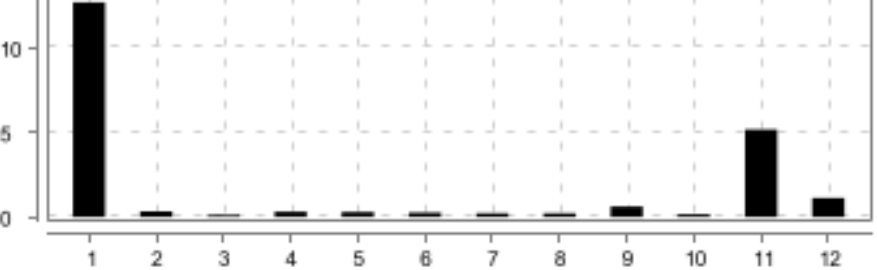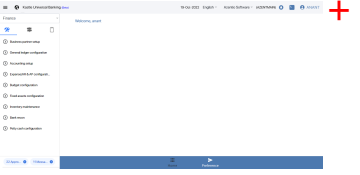
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the Functionality of AR/AP Module	Record a receipt through cheque mode	12	11	1	0	27.219 s
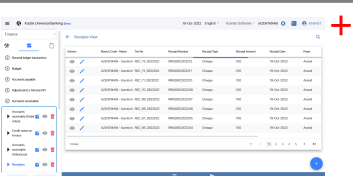
(F)- Check the Functionality of AR/AP Module

FAILED	DURATION - 27.226 s	Scenarios		Steps	
		Total - 1		Total - 12	
/ 1:13:55.822 pm // 1:14:23.048 pm /		Pass - 0	1	Pass - 11	12
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 0	
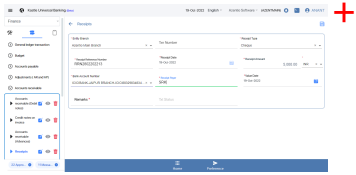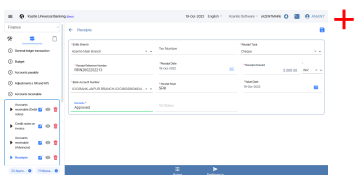
(S)- Record a receipt through cheque mode
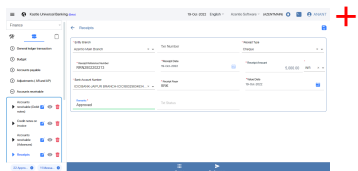
FAILED	DURATION - 27.219 s		Steps	
			Total - 12	
/ 1:13:55.829 pm // 1:14:23.048 pm /			Pass - 11	12
Check the Functionality of AR/AP Module			Fail - 1	
@KUBS_AR_AP_UAT_010_001_TC_01			Skip - 0	

#	Step / Hook Details	Status	Duration
1	Given Navigate The Azentio Url	PASSED	12.688 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.166 s
	screenshot		
2	Then Choose the second Tab Segment	PASSED	0.328 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.185 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	And Click On Main module Accounts Receivable	PASSED	0.117 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.236 s
	screenshot		
4	Then Click on the Receipt Eye Icon	PASSED	0.319 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.295 s
	screenshot		
5	And Click Add icon button	PASSED	0.284 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.296 s
	screenshot		
6	Then Enter Receipt type as cheque	PASSED	0.244 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.180 s
	screenshot		

#	Step / Hook Details	Status	Duration
7	And Enter Receipt Ref Number	PASSED	0.222 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.174 s
	screenshot		
8	Then Enter Receipt Amount	PASSED	0.218 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.147 s
	screenshot		
9	And Enter Bank Account Number	PASSED	0.621 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.140 s
	screenshot		
10	Then Enter Receipt payer	PASSED	0.157 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.168 s
	screenshot		

#	Step / Hook Details	Status	Duration
11	And Enter Remarks for Receipt	PASSED	5.170 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.114 s
	screenshot		
12	Then Save Receipt Record	FAILED	1.111 s

	org.openqa.selenium.ElementClickInterceptedException: element click intercepted: Element <ion-icon name="save" ng-reflect-name="save" role="img" class="md hydrated" aria-label="save"></ion-icon> is not clickable at point (1414, 87). Other element would receive the click: <ion-button color="primary" ng-reflect-color="primary" ng-reflect-disabled="false" class="ion-color ion-color-primary md button button-clear in-toolbar ion-activatable ion-focusable hydrated">...</ion-button> (Session info: chrome=98.0.4758.102) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014547', ip: '10.1.47.111', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6b09de66c7ad0525a0e26534abf94c7f, clickElement {id=66c5123a-1857-45c4-845c-ecd3fa59b55e}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 98.0.4758.102, chrome: {chromedriverVersion: 98.0.4758.80 (7f0488e8ba0d8..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:57049}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:57049/devtoo..., se:cdpVersion: 98.0.4758.102, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Element: [[ChromeDriver: chrome on WINDOWS (6b09de66c7ad0525a0e26534abf94c7f)] -> xpath: //ion-icon[@ng-reflect-name='save']] Session ID: 6b09de66c7ad0525a0e26534abf94c7f
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:251) at org.openqa.selenium.remote.RemoteWebElement.click(RemoteWebElement.java:77) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:52) at jdk.proxy2/jdk.proxy2.$Proxy46.click(Unknown Source) at stepdefinitions.ARAP_CancellationOfGRN.save_receipt_record(ARAP_CancellationOfGRN.java:1061) at ?.Save Receipt Record(file:///C:/Users/inindc00075/git/repository/Arshath_Azentio_AutomationFramework/src/test/java/features/ARAP_GrnCancellation.feature:230) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.148 s

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Record a receipt through cheque mode	
(F) Check the Functionality of AR/AP Module	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Record a receipt through cheque mode	
(F) Check the Functionality of AR/AP Module	

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Record a receipt through cheque mode

(F) Check the Functionality of AR/AP
Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Record a receipt through cheque mode

(F) Check the Functionality of AR/AP
Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Record a receipt through cheque mode

(F) Check the Functionality of AR/AP
Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Record a receipt through cheque mode

(F) Check the Functionality of AR/AP
Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Record a receipt through cheque mode

(F) Check the Functionality of AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Record a receipt through cheque mode

(F) Check the Functionality of AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Record a receipt through cheque mode

(F) Check the Functionality of AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Record a receipt through cheque mode

(F) Check the Functionality of AR/AP Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario)

(S) Record a receipt through cheque mode

(F) Check the Functionality of AR/AP Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario)

(S) Record a receipt through cheque mode

(F) Check the Functionality of AR/AP Module