Cucumber Report

Start : Jan 09, 12:33:20.827 PM	**End : Jan 09, 12:33:31.540 PM**	**Duration : 10.713 s**
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 0 SKIPPED - 7

#	Feature Name	T	P	F	S	Duration
1	*Check the Functionality of Inventory*	*1*	*0*	*1*	*0*	*10.713 s*
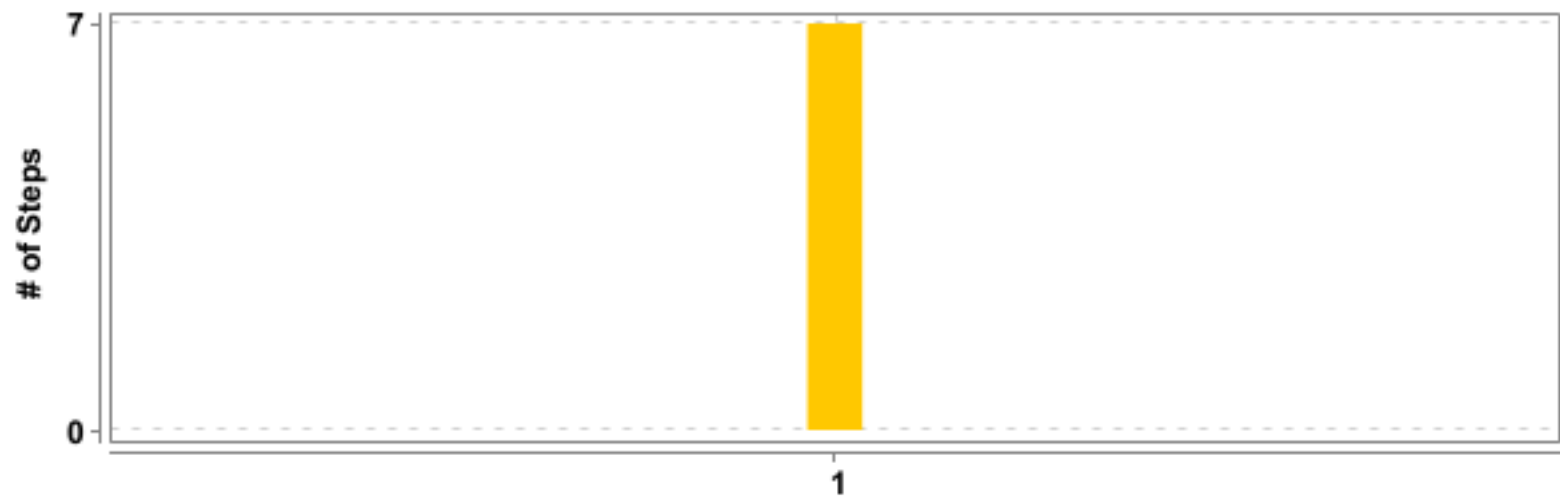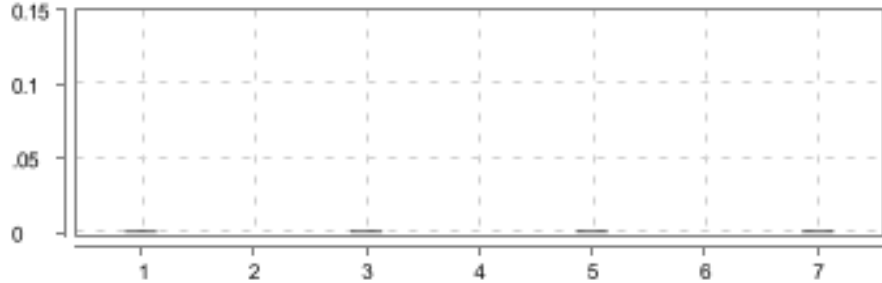
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the Functionality of Inventory	Create denomination details	7	0	0	7	10.706 s

(F)- Check the Functionality of Inventory

FAILED	DURATION - 10.713 s	Scenarios		Steps	
	/ 12:33:20.827 PM // 12:33:31.540 PM /	Total - 1		Total - 7	
		Pass - 0	1	Pass - 0	7
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 7	

(S)- Create denomination details

FAILED	DURATION - 10.706 s		Steps	
	/ 12:33:20.833 PM // 12:33:31.539 PM /		Total - 7	
	Check the Functionality of Inventory		Pass - 0	7
	@KUBS_INV_MGMT_UAT_002_002_01		Fail - 0	
			Skip - 7	

#	Step / Hook Details	Status	Duration
	BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario)	FAILED	10.648 s

	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: session not created: This version of ChromeDriver only supports Chrome version 99 Current browser version is 108.0.5359.125 with binary path C:\Program Files\Google\Chrome\Application\chrome.exe Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.146', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}}]
	    at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:126)
	    at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:84)
	    at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:62)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	    at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:244)
	    at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:166)
	    at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:89)
	    at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:99)
	    at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:86)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:41) at resources.BaseClass.initializeDriver(BaseClass.java:28) at stepdefinitions.HooksClass.browserSetup(HooksClass.java:32)		
1	Given User should go to the kubs url and login as a maker user	SKIPPED	0.001 s
2	And user should navigate to denomination master menu	SKIPPED	0.000 s
3	When click on eye button of denomination master	SKIPPED	0.001 s
4	And click on add button to create denomination details	SKIPPED	0.000 s
5	And user update the data set ID for denomination	SKIPPED	0.001 s
6	And Fill the required fields to create denomination details	SKIPPED	0.000 s
7	Then Save and submit the creation denomination details	SKIPPED	0.001 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.close()" because "this.driver" is null at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		