

FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	AR/AP Module	1	0	1	0	19.700 s



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	AR/AP Module	PO should be displayed in approved queue with Active	5	4	1	0	19.697 s
		Status in maker					

DETAILED SECTION -- 4 --

## (F)- AR/AP Module

FAILED	DURATION - 19.700 s	Scenarios		Steps	
		Total - 1		Total - 5	
/ 2:05:22.085 PM	1 // 2:05:41.785 PM /	Pass - 0	1	Pass - 4	5
		Fail - 1.		Fail - 1	
		Skip - 0		Skip - 0	

## (S)- PO should be displayed in approved queue with Active Status in maker

FAILED	DURATION - 19.697 s	10 -		lF	 -	· -		-	-	-	-		-			-	-	-  -		-	-				-		-			+	 		Step	)S					
/ 2:05:22 088	B PM // 2:05:41.785 PM /	8 -	╢	╬	 -	¦ -	-	-	-	-	-	ı	-	-	-	-	-	÷	-	-		-	-		-	-	-	-	-	+	 	П	Tota	I - 5		4	_		
7 2.00.22.000	77 W // 2.00.41.700 F W /	6 -	11	╫	 -	÷-	-	-	-	-	-		-	-	-	-	-	ij	-	-	-	-	-	j	-	-	-	-	-	Ť	 -		Pas	s - 4	П		5	١	ı
AR/AP Module	e	2 -				Ι.												_												Ī	 				М	O	J	L	,
WKI IBS AB/	AP UAT 001 001 TC 02 04	0 -	1		 _	_	L.			_						_	_			_	_			_	_			_			 		Skip	- 0		1			,
WICODS_AIV/	AI _0AI_001_001_IC_02_04					1						2						3						4						5									

#	Step / Hook Details	Status	Duration
1	And user update the data set ID for Purchase Order	PASSED	0.650 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.140 s
	screenshot		
	+		
2	Given User should go to the kubs url and login as a maker user	PASSED	10.657 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.199 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	And user should navigate to accounts payable menu	PASSED	2.468 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot	PASSED	0.258 s
4	Then Click on purchase order Eye Icon	PASSED	0.150 s
	AFTER STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.226 s
	screenshot		
5	Then Get the purchase order Txn status by searching the record via business partner	FAILED	1.554 s
	org.openqa.selenium.ElementNotInteractableException: element not interactable (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [27447a95e892af2e4422480831842c71, sendKeysToElement {id=cb1a190b-7eb7-4c61-a48f-2e1a07042f59, value=[Ljava.lang. CharSequence;@3220c28}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5, userDataDir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:58577}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:58577/devtoo, se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Element: [[ChromeDriver: chrome on WINDOWS (27447a95e892af2e4422480831842c71)] -> xpath: (//ion-buttons/ion-item/ion-icon)[2]] Session ID: 27447a95e892af2e4422480831842c71		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)		
	at org. openiqa. selenium. i emote. sel vice. Driver Confindatue Aecutor. eAecute(Driver Confindatue Aecutor. java. 1539)		

DETAILED SECTION -- 6 --

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:251) at org.openqa.selenium.remote.RemoteWebElement.sendKeys(RemoteWebElement.java:107) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:52) at jdk.proxy2/jdk.proxy2.\$Proxy46.sendKeys(Unknown Source) at stepdefinitions.AccountPayable_VendorPurchaseOrder. get_the_purchase_order_txn_status_by_searching_the_record_via_business_partner(AccountPayable_VendorPurchaseOrder.java:481) at ?.Get the purchase order Txn status by searching the record via business partner(file:///C:/Users/inindc00089/eclipse-workspace/ AzentioAutomationFramework_ARAP/src/test/java/features/ArAp1.feature:107) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  screenshot	PASSED	0.136 s


EXPANDED SECTION -- 7

(Step) AFTER\_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) PO should be displayed in approved queue with Active Status in maker

(F) AR/AP Module

AZENTIO<sup>®</sup>
ONEBanking 07-Jan-2024 English - Azentio Software - (AZENTMAIN) - ANANT (Step) AFTER\_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. Finance • Configuration java.Scenario)  $\circ$ Corporate 0 0 Scheme wise Amount Financed (S) PO should be displayed in approved queue with Active Status in maker (F) AR/AP Module 22 Appro... 8 11 Mess... 8

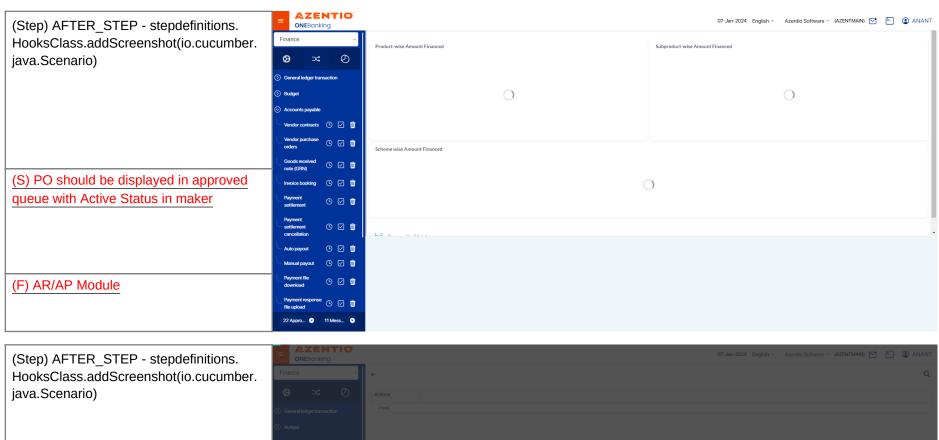

(S) PO should be displayed in approved queue with Active Status in maker

(F) AR/AP Module

**EXPANDED SECTION** 

