


FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	BUSINESS PARTNER SETUP	1	0	1	0	2 m 22.539 s

SCENARIOS SUMMARY

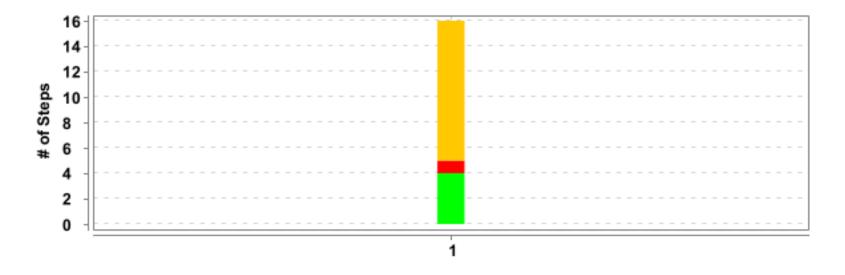


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	BUSINESS PARTNER SETUP	Create a Vendor for the procurement of an asset	16	4	1	11	2 m 22.524 s

DETAILED SECTION -- 4 --

(F)- BUSINESS PARTNER SETUP

FAILED	DURATION - 2 m 22.539 s	Scenarios		Steps	
		Total - 1		Total - 16	
/ 3:23:16.002 A	M // 3:25:38.541 AM /	Pass - 0	1	Pass - 4	16
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 11	

(S)- Create a Vendor for the procurement of an asset

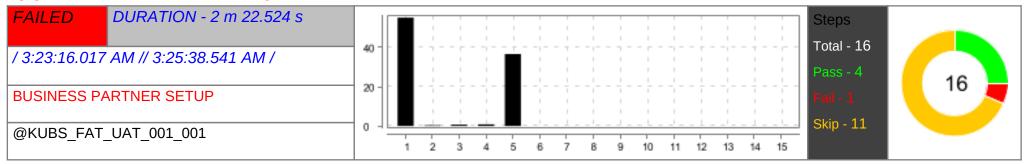

#	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	PASSED	55.133 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	1.688 s
	screenshot		
	The state of the s		
2	And user should navigate to business partner setup menu	PASSED	0.381 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.349 s
	screenshot		


#	Step / Hook Details	Status	Duration
	The Contract of the Contract o		
3	When click on eye button of business partner	PASSED	0.690 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	1.780 s
	screenshot		
	## OF THE PROPERTY AND PROPERT		
4	And click on add button of business partner	PASSED	0.814 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.572 s
	Screenshot ** *********************************		
5	And Fill the required fields to create a vendor	FAILED	36.607 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [f690fe214a0989f274523a83656360bf, findElement {using=xpath, value=//owl-date-time-calendar/div/button[2]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46, userDataDir: C:\Users\ININDC=1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:55434}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:55434/devtoo, se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: f690fe214a0989f274523a83656360bf at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:77) at java.base/java.lang.reflect.CelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:490) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.HttpCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.support.pagefactory.DefaultElement(RemoteWebDriver.java:373) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy46.isDisplayed(Unknown Source) at org.openqa.selenium.support.ui.ExpectedConditions.elementlfVisible(ExpectedConditions.java:307) at org.openqa.selenium.support.ui.ExpectedConditions.access\$000(ExpectedConditions.java:307) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:293) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:293) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions\$25.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions\$25.apply(ExpectedConditions.java:660) at or		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [f690fe214a0989f274523a83656360bf, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45} (76e4c1bb2ab46, userDataDir: C:\Users\ININDC~1\AppData\L), goog:chromeOptions: {debuggerAddress: localhost:55434}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:55434/devtoo, se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: f690fe214a0989f274523a83656360bf at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:490) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:133)	FAILED	12.020 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)		
	at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347)		
	at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		
6	Then Save and submit the record to create vendor	SKIPPED	0.000 s
7	And User should go to the kubs url and login as a reviewer user	SKIPPED	0.000 s
8	Then Click on notification button in reviewer	SKIPPED	0.000 s
9	And approve the record by the reviewer user	SKIPPED	0.000 s
10	Given User should go to the kubs url and login as a checker user	SKIPPED	0.000 s
11	And Click on security management in checker	SKIPPED	0.000 s
12	Then Click on open pool in checker	SKIPPED	0.000 s
13	And Click on claim button in checker	SKIPPED	0.000 s
14	And capture claimed status	SKIPPED	0.001 s
15	Then click on notification in checker	SKIPPED	0.000 s
16	Then checker should approved the contract record	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.242 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.		
	version: bc3511cbda 3ystem mio. nost. P300x6K0 , ip. 10.1.47.121 , os.name. Windows 10 , os.aich. amdo4 , os.version. 10.0 , java.		
	Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45		
	(76e4c1bb2ab46, userDataDir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:55434},		
	javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy:		
	Proxy(), se:cdp: ws://localhost:55434/devtoo, se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true,		
	webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: f690fe214a0989f274523a83656360bf		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect. Delegating Constructor Accessor Impl.new Instance (Delegating Constructor Accessor Impl.java: 45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		
	at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)		
	at org.openqa.selenium.remote.rmpcommandexecutor.execute(httpcommandexecutor.java.104)		
	0 1 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432) at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		

EXPANDED SECTION --- 9 --

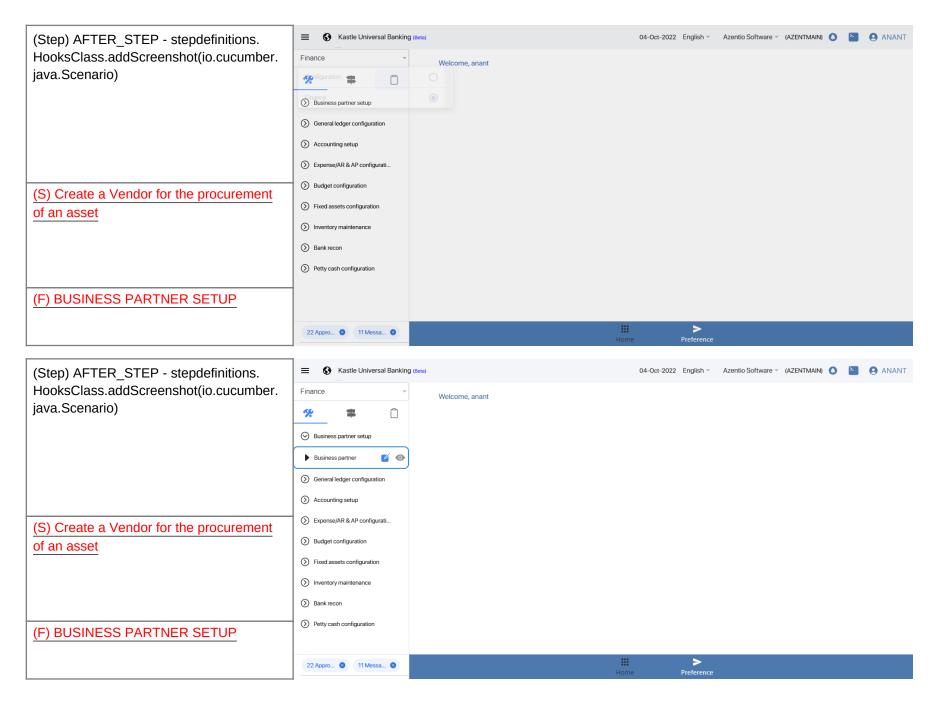

EXPANDED SECTION -- 10 --

