

Cucumber Report

Feb 22, 2022, 1:10:49 AM

Start : Feb 22, 1:08:57.070 AM

End : Feb 22, 1:10:33.774 AM

Duration : 1 m 36.704 s

Features


Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0


PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 0
SKIPPED - 21

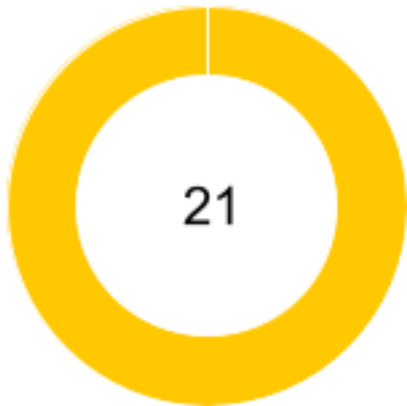



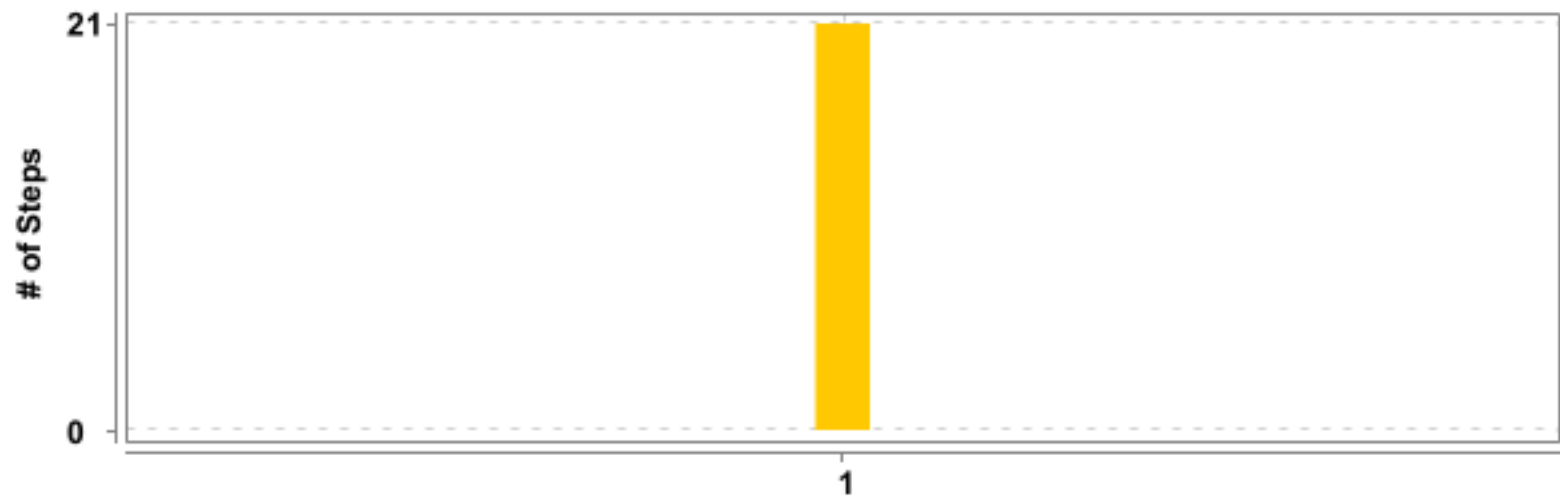

#	Feature Name	T	P	F	S	Duration
1	AR/AP Module	1	0	1	0	1 m 36.704 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	AR/AP Module	Create Bill against PO & GRN for above vendor	21	0	0	21	1 m 36.653 s

(F)- AR/AP Module

FAILED	DURATION - 1 m 36.704 s	Scenarios		Steps	
/ 1:08:57.070 AM // 1:10:33.774 AM /		Total - 1	1	Total - 21	21
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 21	

(S)- Create Bill against PO & GRN for above vendor
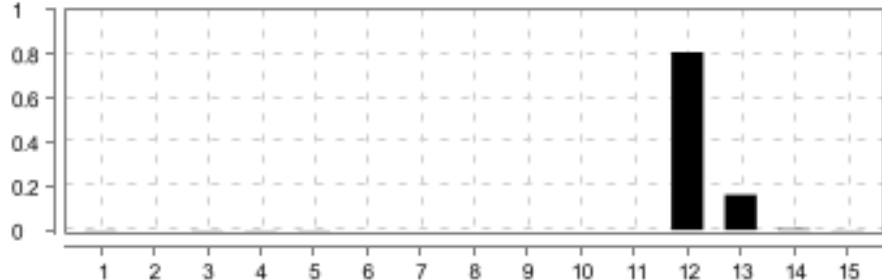
<div>FAILED</div> <div>DURATION - 1 m 36.653 s</div>		<div></div>	Steps		<div></div>
/ 1:08:57.121 AM // 1:10:33.774 AM /			Total - 21		
AR/AP Module			Pass - 0		
@KUBS_AR/AP_UAT_001_001_TC_009			Fail - 0		
			Skip - 21		

#	Step / Hook Details	Status	Duration
	BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario) org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}, desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}] at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:565) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:244) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:166) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:89) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:99) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:86) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:41) at resources.BaseClass.initializeDriver(BaseClass.java:28) at stepdefinitions.HooksClass.browserSetup(HooksClass.java:32) Caused by: java.io.UncheckedIOException: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:6467 at org.openqa.selenium.remote.http.netty.NettyHttpHandler.makeCall(NettyHttpHandler.java:80) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)	FAILED	1 m 35.359 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyHttpHandler.execute(NettyHttpHandler.java:51) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:56) at org.openqa.selenium.remote.http.netty.NettyClient.execute(NettyClient.java:119) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:102) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:84) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:62) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:244) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:166) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:89) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:99) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:86) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:41) at resources.BaseClass.initializeDriver(BaseClass.java:28) at stepdefinitions.HooksClass.browserSetup(HooksClass.java:32) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:59) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) at io.cucumber.core.runner.TestStep.run(TestStep.java:64) at io.cucumber.core.runner.TestCase.run(TestCase.java:98) at io.cucumber.core.runner.Runner.runPickle(Runner.java:71) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$0(TestNGCucumberRunner.java:116) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:117) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:113) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:31) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		

#	Step / Hook Details	Status	Duration
	<pre> at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:133) at org.testng.internal.TestInvoker.invokeMethod(TestInvoker.java:598) at org.testng.internal.TestInvoker.invokeTestMethod(TestInvoker.java:173) at org.testng.internal.MethodRunner.runInSequence(MethodRunner.java:46) at org.testng.internal.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:824) at org.testng.internal.TestInvoker.invokeTestMethods(TestInvoker.java:146) at org.testng.internal.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:146) at org.testng.internal.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:794) at org.testng.TestRunner.run(TestRunner.java:596) at org.testng.SuiteRunner.runTest(SuiteRunner.java:377) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:371) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:332) at org.testng.SuiteRunner.run(SuiteRunner.java:276) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:53) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:96) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1212) at org.testng.TestNG.runSuitesLocally(TestNG.java:1134) at org.testng.TestNG.runSuites(TestNG.java:1063) at org.testng.TestNG.run(TestNG.java:1031) at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115) at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251) at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77) </pre> <p>Caused by: java.net.ConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:1]:6467</p> <pre> at org.asynchttpclient.netty.channel.NettyConnectListener.onFailure(NettyConnectListener.java:179) at org.asynchttpclient.netty.channel.NettyChannelConnector\$1.onFailure(NettyChannelConnector.java:108) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:28) at org.asynchttpclient.netty.SimpleChannelFutureListener.operationComplete(SimpleChannelFutureListener.java:20) at io.netty.util.concurrent.DefaultPromise.notifyListener0(DefaultPromise.java:578) at io.netty.util.concurrent.DefaultPromise.notifyListeners0(DefaultPromise.java:571) at io.netty.util.concurrent.DefaultPromise.notifyListenersNow(DefaultPromise.java:550) at io.netty.util.concurrent.DefaultPromise.notifyListeners(DefaultPromise.java:491) at io.netty.util.concurrent.DefaultPromise.setValue0(DefaultPromise.java:616) at io.netty.util.concurrent.DefaultPromise.setFailure0(DefaultPromise.java:609) at io.netty.util.concurrent.DefaultPromise.tryFailure(DefaultPromise.java:117) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.fulfillConnectPromise(AbstractNioChannel.java:321) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:337) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:707) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:655) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:581) </pre>		

#	Step / Hook Details	Status	Duration
	at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:493) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:986) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833) Caused by: io.netty.channel.AbstractChannel\$AnnotatedConnectException: Connection refused: no further information: localhost/[0:0:0:0:0:0:0:1]:6467 Caused by: java.net.ConnectException: Connection refused: no further information at java.base/sun.nio.ch.Net.pollConnect(Native Method) at java.base/sun.nio.ch.Net.pollConnectNow(Net.java:672) at java.base/sun.nio.ch.SocketChannelImpl.finishConnect(SocketChannelImpl.java:946) at io.netty.channel.socket.nio.NioSocketChannel.doFinishConnect(NioSocketChannel.java:330) at io.netty.channel.nio.AbstractNioChannel\$AbstractNioUnsafe.finishConnect(AbstractNioChannel.java:334) at io.netty.channel.nio.NioEventLoop.processSelectedKey(NioEventLoop.java:707) at io.netty.channel.nio.NioEventLoop.processSelectedKeysOptimized(NioEventLoop.java:655) at io.netty.channel.nio.NioEventLoop.processSelectedKeys(NioEventLoop.java:581) at io.netty.channel.nio.NioEventLoop.run(NioEventLoop.java:493) at io.netty.util.concurrent.SingleThreadEventExecutor\$4.run(SingleThreadEventExecutor.java:986) at io.netty.util.internal.ThreadExecutorMap\$2.run(ThreadExecutorMap.java:74) at io.netty.util.concurrent.FastThreadLocalRunnable.run(FastThreadLocalRunnable.java:30) at java.base/java.lang.Thread.run(Thread.java:833)		
1	Given User should go to the kubs url and login as a maker user	SKIPPED	0.001 s
2	And user should navigate to accounts payable menu	SKIPPED	0.000 s
3	When click on eye button of invoice booking	SKIPPED	0.001 s
4	And click on add button for invoice booking	SKIPPED	0.001 s
5	And Fill the required fields for invoice booking	SKIPPED	0.001 s
6	Then Save and submit the invoice billing	SKIPPED	0.000 s
7	And User should go to the kubs url and login as a reviewer user	SKIPPED	0.000 s
8	Then Click on notification button in reviewer	SKIPPED	0.000 s
9	And approve the record by the reviewer user	SKIPPED	0.000 s
10	Given User should go to the kubs url and login as a checker user	SKIPPED	0.000 s
11	And Click on security management in checker	SKIPPED	0.000 s
12	Then Click on open pool in checker	SKIPPED	0.809 s
13	And Click on claim button in checker	SKIPPED	0.161 s
14	And capture claimed status	SKIPPED	0.004 s
15	Then click on notification in checker	SKIPPED	0.002 s
16	Then checker should approved the invoice billing	SKIPPED	0.001 s
17	Given User should go to the kubs url and login as a maker user	SKIPPED	0.000 s
18	And user should navigate to accounts payable menu	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
19	When click on eye button of invoice booking	SKIPPED	0.001 s
20	Then Get the invoice status	SKIPPED	0.001 s
21	And maker should logout	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.021 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.close()" because "this.driver" is null at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		