**Duration: 18.958 s** Start: Mar 21, 11:57:01.704 am End: Mar 21, 11:57:20.662 am Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 7 SKIPPED - 0 SKIPPED - 0 SKIPPED - 0 8 40 50 60 40 50 60 40 50 60 30 Pass % 70 30 Pass % 70 30 Pass % 70 20 20 20 80 80 80 90 90 10 100

FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	Check the Functionality of the GL2 Module	1	0	1	0	18.958 s




#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the Functionality of the GL2	Check the created already and trying to create same	8	7	1	0	18.953 s
	<u>Module</u>	accounting book					

DETAILED SECTION -- 4 --

## **(F)- Check the Functionality of the GL2 Module**

FAILED	DURATION - 18.958 s	Scenarios		Steps	
		Total - 1		Total - 8	
/ 11:57:01.704	! am // 11:57:20.662 am /	Pass - 0	1	Pass - 7	8
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 0	

## (S)- Check the created already and trying to create same accounting book

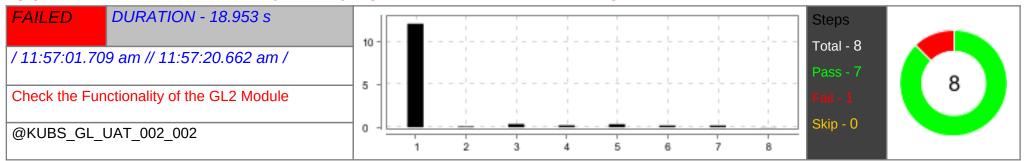

#	Step / Hook Details	Status	Duration
1	Given Navigate to Azentio Kubs	PASSED	12.099 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.152 s
	screenshot		
	To the Control of the		
2	And Click on Accounting Setup module	PASSED	0.099 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.211 s
	screenshot		


3 Then Click sub module Accounting book definition  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario)  4 And Click on Add icon  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario)  5 Then Choose the Template Type of Custom Template  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario)  5 Then Choose the Template Type of Custom Template  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario)  5 Then Choose the Template Type of Custom Template  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario)  5 Screenshot  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario)  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario)	#	Step / Hook Details	Status	Duration
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  screenshot  And Click on Add icon  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  passed  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  Passed  O.203 s  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  Passed  O.164 s				
screenshot  And Click on Add icon  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  5 Then Choose the Template Type of Custom Template  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  Screenshot  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.203 s  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.164 s	3	·	PASSED	
And Click on Add icon  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  Screenshot  Then Choose the Template Type of Custom Template  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  Screenshot  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.203 s  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.164 s			PASSED	0.310 s
4 And Click on Add icon  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario)  Screenshot  5 Then Choose the Template Type of Custom Template  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario)  Screenshot  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario)  Screenshot  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario)  PASSED  0.203 s  PASSED  0.164 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  screenshot  Then Choose the Template Type of Custom Template  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  Screenshot  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  ARTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  ARTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  ARTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  ARTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.203 s  PASSED  0.164 s		I have a second of the second		
screenshot  Then Choose the Template Type of Custom Template  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  Screenshot  And Enter Another Book Name  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.203 s  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.164 s	4	And Click on Add icon	PASSED	0.235 s
5 Then Choose the Template Type of Custom Template  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  Screenshot  6 And Enter Another Book Name  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.203 s  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.164 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.282 s
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  Screenshot  6 And Enter Another Book Name  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.166 s  PASSED  0.203 s  PASSED  0.164 s		The state of the s		
Screenshot  6 And Enter Another Book Name  AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.203 s  0.164 s	5	Then Choose the Template Type of Custom Template	PASSED	0.372 s
6 And Enter Another Book Name  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.203 s  0.164 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.166 s
6 And Enter Another Book Name  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.203 s  0.164 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.164 s				
	6	And Enter Another Book Name	PASSED	0.203 s
screenshot		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.164 s
		screenshot		


#	Step / Hook Details	Status	Duration
7	Then Enter the Remark	PASSED	0.206 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.163 s
	screenshot		
	*** O ********************************		
8	Then Validate the Message we get	FAILED	0.021 s
	org.openga.selenium.JavascriptException: javascript error: Cannot read properties of null (reading 'shadowRoot') (Session info: chrome=99.0.4844.51) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014547', ip: '10.1.47.111', os. name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openga.selenium.chrome.ChromeDriver Command: [e0ac777363609c67456588302a8e3f79, executeScript {script=return document.querySelector('ion-toast').shadowRoot. querySelector('div[class=toast-message]'), args=[j]] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.51, chrome: {chromedriverVersion: 98.0.4758.80 (7f0488e8bad08, userDataDir: C:\USers\INNDC-1\AppDataL}, goog:chromeOptions: {debuggerAddress: localhost:60753}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws:/localhost:60753/devtoo, se:cdpVersion: 99.0.4844.51, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 300000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: e0ac777363609c67456588302a8e3f79  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(NativeConstructorAccessorImpl.java:77)  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)  at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)  at org.openga.selenium.remote.AttpCommandExecutor.java:184)  at org.openga.selenium.remote.Bethium.temsec.DriverCommandExecutor.java:184)  at org.openga.selenium.remote.Bethium.te		

DETAILED SECTION -- 7 --


#	Step / Hook Details	Status	Duration
	at ?.Validate the Message we get(file:///C:/Users/inindc00075/git/repository/Arshath_Azentio_AutomationFramework/src/test/java/features/GL2_Accounting_Setup.feature:77)  * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.111 s
	screenshot		
	## On Annual Control of the Control		

EXPANDED SECTION --- 8 --

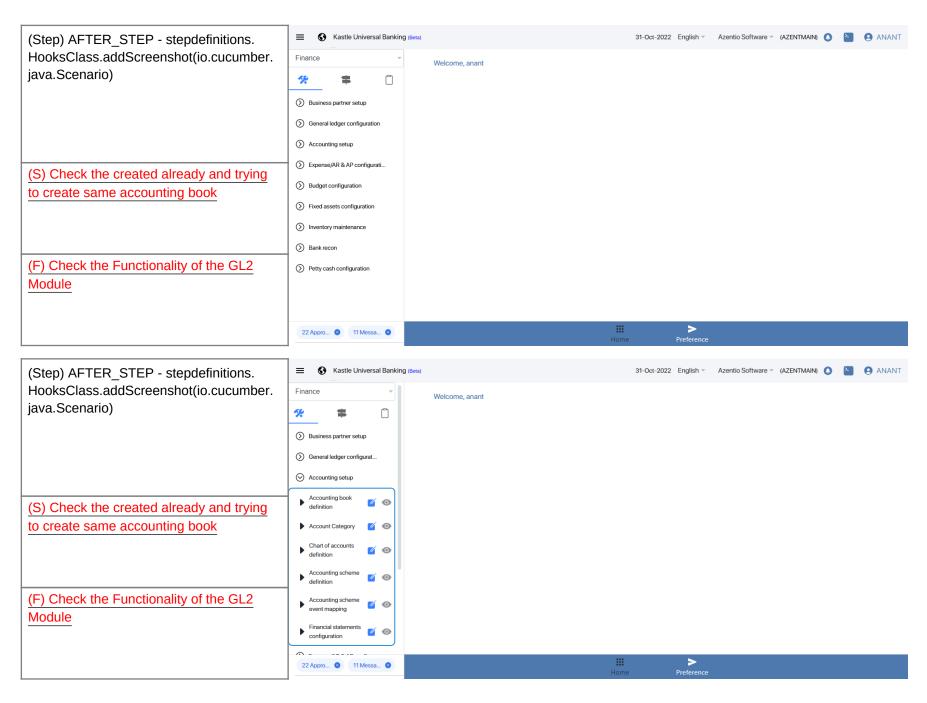

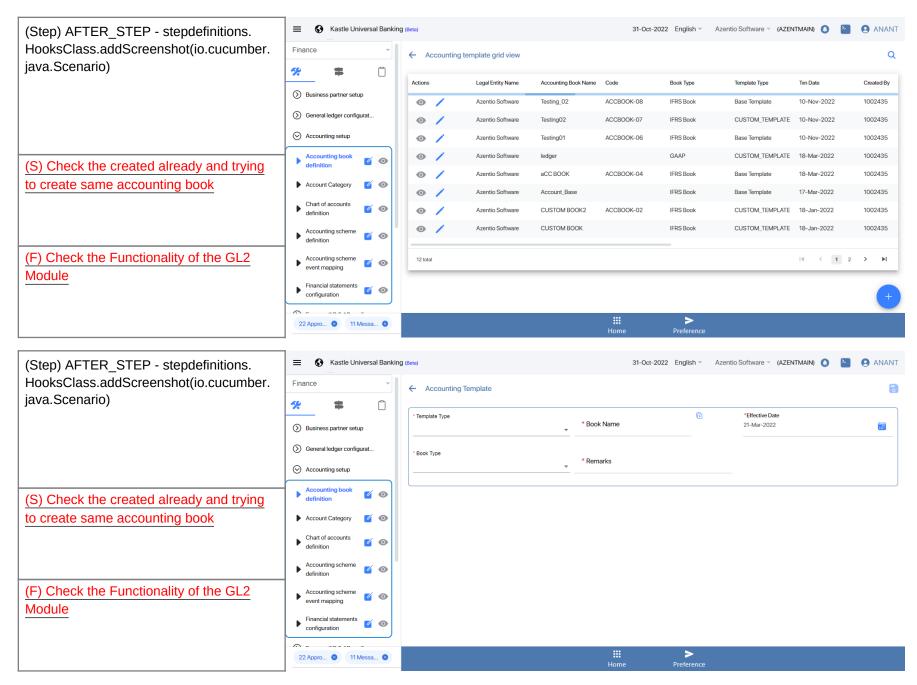

EXPANDED SECTION -- 10 --

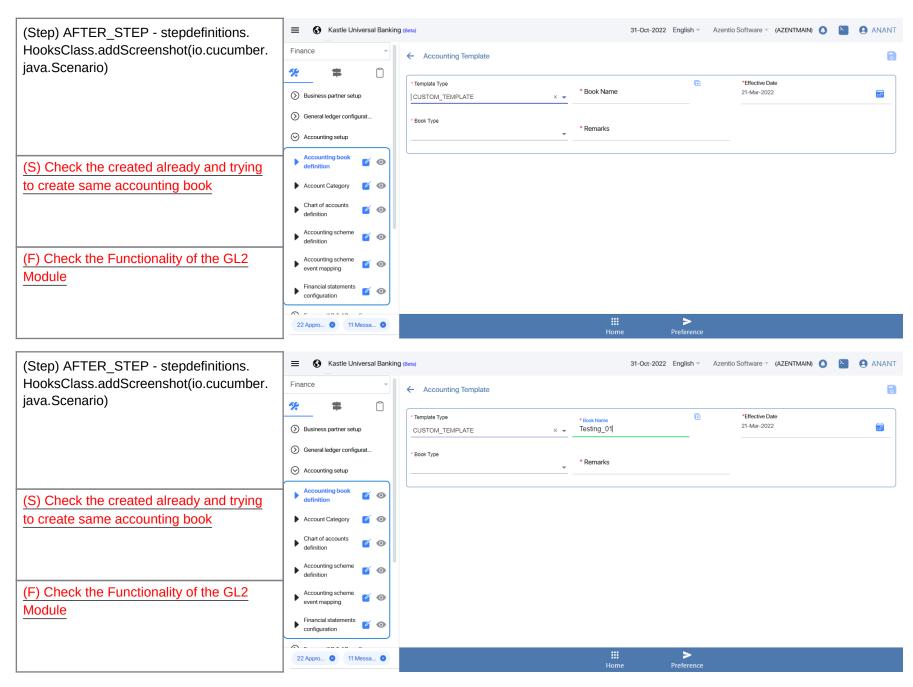

EXPANDED SECTION -- 11 --

