

# Cucumber Report

9 Jan 2023, 12:58:51 PM

**Start : Jan 09, 12:54:41.682 PM**

**End : Jan 09, 12:58:45.777 PM**

**Duration : 4 m 4.095 s**

*Features*

*Scenarios*

*Steps*

**PASSED - 0**

**FAILED - 1**

**SKIPPED - 0**

**PASSED - 0**

**FAILED - 1**

**SKIPPED - 0**

**PASSED - 0**

**FAILED - 1**

**SKIPPED - 6**







#	Feature Name	T	P	F	S	Duration
1	<u>Check the Functionality of Inventory</u>	1	0	1	0	4 m 4.095 s

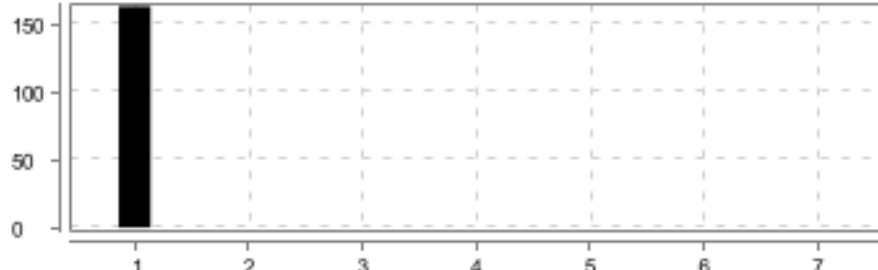



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Check the Functionality of Inventory</u>	<u>Create denomination details</u>	7	0	1	6	4 m 4.087 s

**(F)- Check the Functionality of Inventory**

<b>FAILED</b>	<b>DURATION - 4 m 4.095 s</b>	Scenarios		Steps	
/ 12:54:41.682 PM // 12:58:45.777 PM /		Total - 1		Total - 7	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 6	

**(S)- Create denomination details**

<div>FAILED</div> <div>DURATION - 4 m 4.087 s</div>			<div>Steps</div> <div>Total - 7</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 6</div>	
/ 12:54:41.690 PM // 12:58:45.777 PM /				
Check the Functionality of Inventory				
@KUBS_INV_MGMT_UAT_002_002_01				

#	Step / Hook Details	Status	Duration
1	<p>Given User should go to the kubs url and login as a maker user</p> <p>org.openqa.selenium.WebDriverException: disconnected: unable to connect to renderer (failed to check if window was closed: disconnected: unable to connect to renderer) (Session info: chrome=108.0.5359.125) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.146', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [30b50e38faf5ef00be3a724f9982c203, findElement {using=xpath, value=//ion-select[@aria-label='Amlock']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 108.0.5359.125, chrome: {chromedriverVersion: 108.0.5359.22 (ec46c90f5938..., userDataDir: C:\Users\ININDC~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:50762}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:50762/devtoo..., se:cdpVersion: 108.0.5359.125, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 30b50e38faf5ef00be3a724f9982c203</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)</p>	<b>FAILED</b>	2 m 43.038 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy46.toString(Unknown Source) at java.base/java.lang.String.valueOf(String.java:4215) at java.base/java.lang.StringBuilder.append(StringBuilder.java:169) at org.openqa.selenium.support.ui.ExpectedConditions\$10.toString(ExpectedConditions.java:298) at java.base/java.lang.String.valueOf(String.java:4215) at java.base/java.lang.StringBuilder.append(StringBuilder.java:169) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:229) at helper.WaitHelper.waitForElementToVisibleWithFluentWait(WaitHelper.java:102) at stepdefinitions.KUBS_Login.loginToAzentioAppByMaker(KUBS_Login.java:47) at stepdefinitions.ACCOUNTSPAYABLE_VendorContracts. user_should_go_to_the_kubs_url_and_login_as_a_maker_user(ACCOUNTSPAYABLE_VendorContracts.java:50)   at ?.User should go to the kubs url and login as a maker user(file:///C:/Users/ININDC00089/git/AzentioAutomationFramework/ArAp/ AzentioAutomationFramework_ARAP_Excel/src/test/java/features/InventoryManageMent_Testing.feature:5) * Not displayable characters are replaced by '?'. </pre>		
	<p><b>AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)</b></p> <pre> org.openqa.selenium.WebDriverException: disconnected: unable to connect to renderer (failed to check if window was closed: disconnected: unable to connect to renderer) (Session info: chrome=108.0.5359.125) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.146', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [30b50e38faf5ef00be3a724f9982c203, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 108.0.5359.125, chrome: {chromedriverVersion: 108.0.5359.22 (ec46c90f5938..., userDataDir: C:\Users\ININDC~1\AppData\Local\...}, goog:chromeOptions: {debuggerAddress: localhost:50762}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:50762/devtoo..., se:cdpVersion: 108.0.5359.125, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 30b50e38faf5ef00be3a724f9982c203   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) </pre>	FAILED	34.959 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347) at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		
2	And user should navigate to denomination master menu	SKIPPED	0.003 s
3	When click on eye button of denomination master	SKIPPED	0.001 s
4	And click on add button to create denomination details	SKIPPED	0.000 s
5	And user update the data set ID for denomination	SKIPPED	0.000 s
6	And Fill the required fields to create denomination details	SKIPPED	0.001 s
7	Then Save and submit the creation denomination details	SKIPPED	0.001 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	32.896 s
	org.openqa.selenium.WebDriverException: disconnected: unable to connect to renderer (failed to check if window was closed: disconnected: unable to connect to renderer) (Session info: chrome=108.0.5359.125) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.146', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [30b50e38faf5ef00be3a724f9982c203, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 108.0.5359.125, chrome: {chromedriverVersion: 108.0.5359.22 (ec46c90f5938..., userDataDir: C:\Users\ININDC~1\AppData\Local\..., goog:chromeOptions: {debuggerAddress: localhost:50762}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:50762/devtoo..., se:cdpVersion: 108.0.5359.125, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 30b50e38faf5ef00be3a724f9982c203 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432) at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		