Cucumber Report

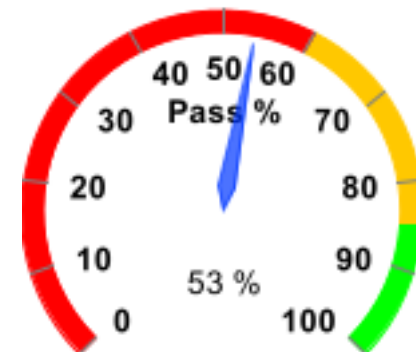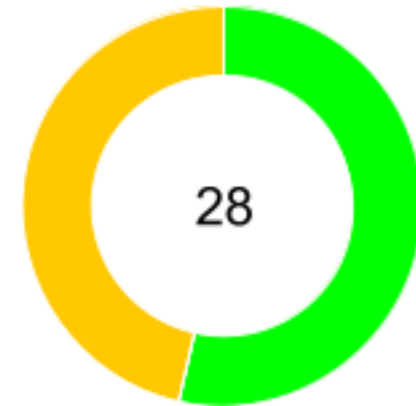| Start : Feb 07, 1:25:12.357 pm	End : Feb 07, 1:25:40.595 pm	Duration : 28.238 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 15 FAILED - 0 SKIPPED - 13
1	1	28
0 %	0 %	53 %

#	Feature Name	T	P	F	S	Duration
1	Check The Azentio UAT Budget Request and Allocation functionaliy	1	0	1	0	28.238 s
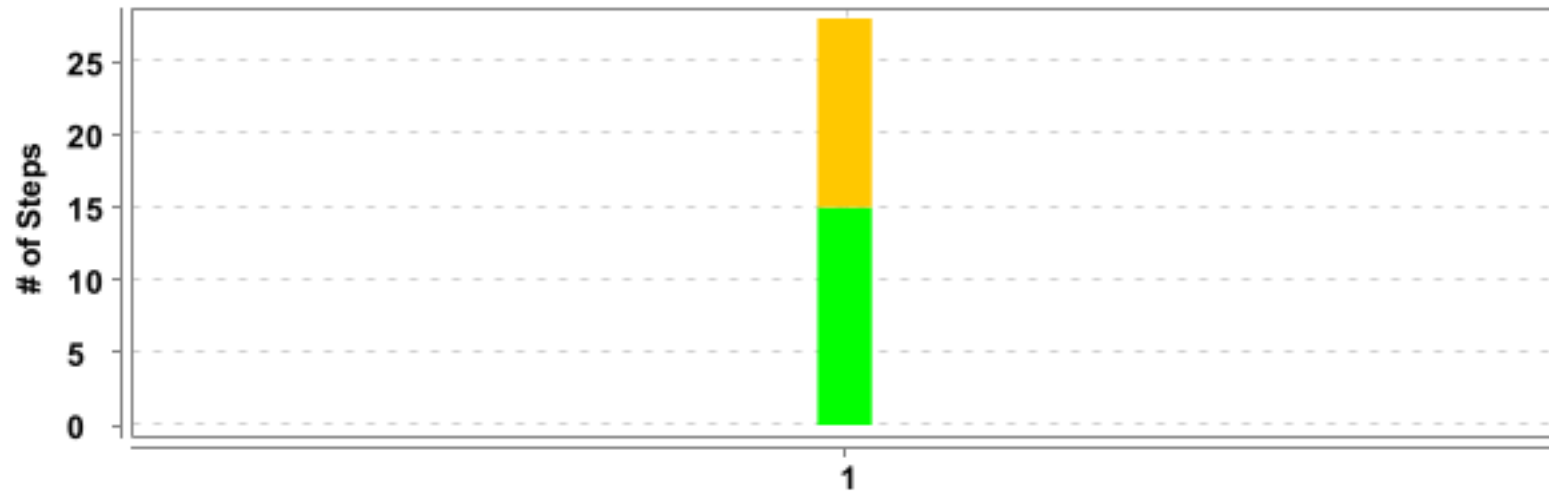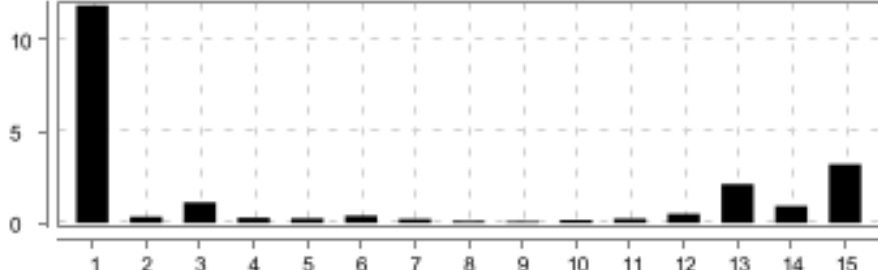
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check The Azentio UAT Budget Request and Allocation functionaliy	Check the rejected budget can be used	28	15	0	13	28.228 s

(F)- Check The Azentio UAT Budget Request and Allocation functionaliy

FAILED	DURATION - 28.238 s	Scenarios		Steps	
/ 1:25:12.357 pm // 1:25:40.595 pm /		Total - 1		Total - 28	
		Pass - 0	**1**	Pass - 15	**28**
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 13	
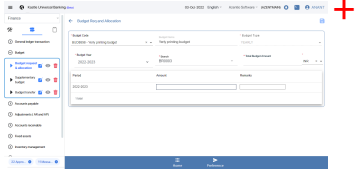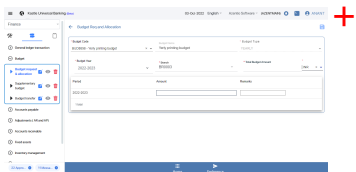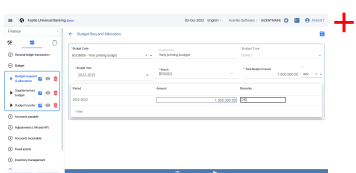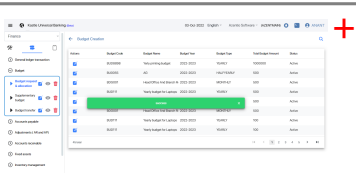
(S)- Check the rejected budget can be used

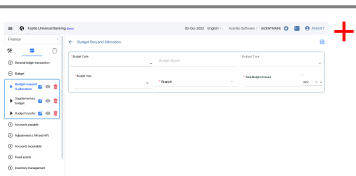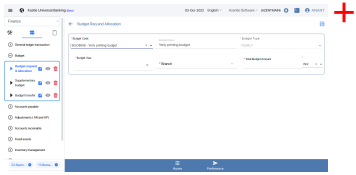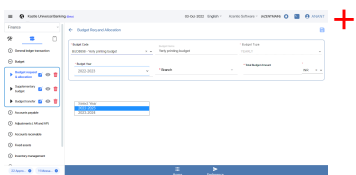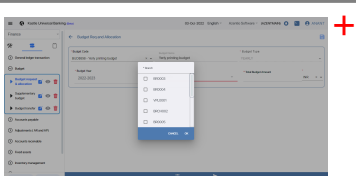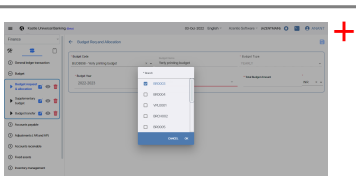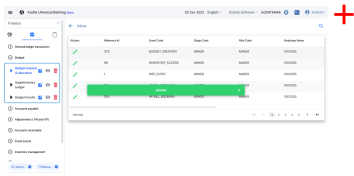| FAILED	DURATION - 28.228 s		Steps	
/ 1:25:12.367 pm // 1:25:40.595 pm /			Total - 28	
Check The Azentio UAT Budget Request and Allocation functionaliy			Pass - 15	**28**
			Fail - 0	
@KUBS_UAT_KUBS_BP_UAT_002_007			Skip - 13	

#	Step / Hook Details	Status	Duration
1	Given Navigate to the Azentio Url	PASSED	11.880 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.148 s
	screenshot		
2	Then click the Two Direction Icon	PASSED	0.332 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.197 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	And click to the Budget	PASSED	1.120 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.124 s
	screenshot		
4	Then click on the Budget Sub module Budget Request and Allocation Near Eye Icon	PASSED	0.295 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.291 s
	screenshot		
5	And click on the Add icon in Request and Allocation	PASSED	0.243 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.292 s
	screenshot		
6	Then Current Budget Code	PASSED	0.388 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.173 s
	screenshot		

#	Step / Hook Details	Status	Duration
7	And select the Budget Year	PASSED	0.207 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.220 s
	screenshot		
8	Then click on the Branch	PASSED	0.114 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.318 s
	screenshot		
9	And Select Branch checkbox	PASSED	0.083 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.133 s
	screenshot		
10	Then click on the Branch ok button	PASSED	0.168 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.375 s
	screenshot		

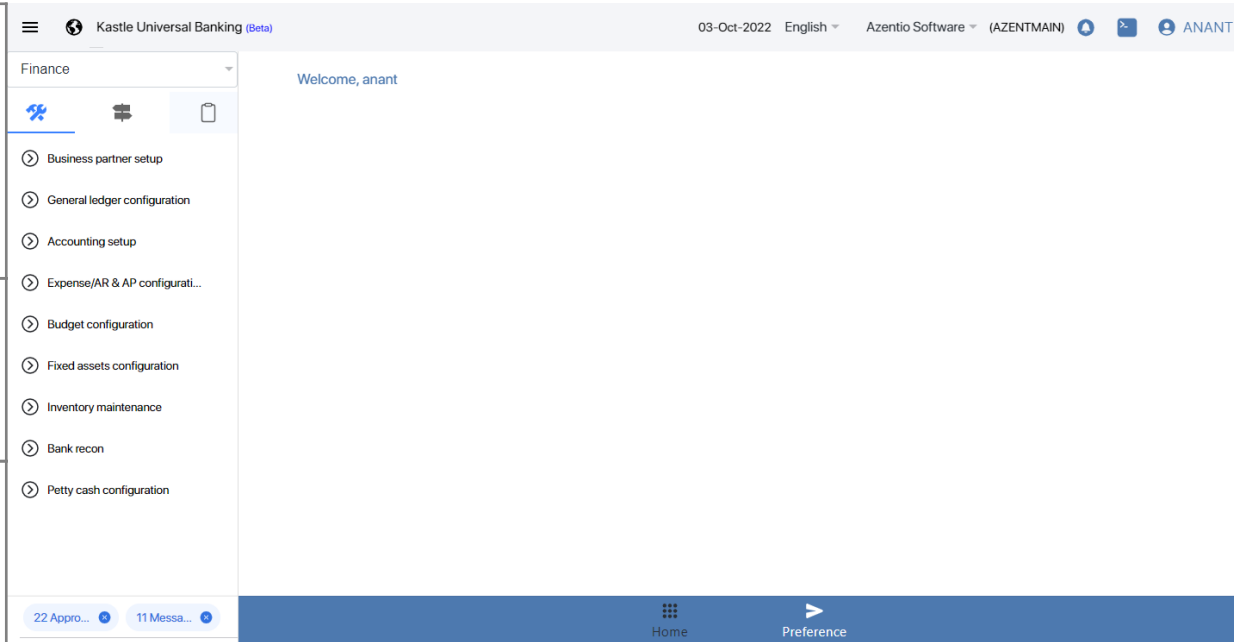| #	Step / Hook Details	Status	Duration
11	Then select one currency we need	PASSED	0.227 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.169 s
	screenshot		
12	And Budget Amount for Budget Type Show in Budget type field	PASSED	0.502 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.171 s
	screenshot		
13	And click on the save button	PASSED	2.127 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.132 s
	screenshot		
14	Then click on the Maker icon button	PASSED	0.922 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.266 s
	screenshot		

#	Step / Hook Details	Status	Duration
15	And click on the Record Reject	PASSED	3.198 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	FAILED	0.545 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014547', ip: '10.1.47.111', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa. selenium.chrome.ChromeDriver Command: [0d3be2297f5a964a0cfdb294aa36cf96, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 97.0.4692.99, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:56880}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:56880/devtoo..., se:cdpVersion: 97.0.4692.99, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 0d3be2297f5a964a0cfdb294aa36cf96
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)
	   at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347)
	   at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		

16	Then Again Login the Maker	SKIPPED	0.000 s
17	Then click the Two Direction Icon	SKIPPED	0.000 s
18	And click to the Budget	SKIPPED	0.000 s
19	Then click on the Budget Sub module Budget Request and Allocation Near Eye Icon	SKIPPED	0.000 s
20	And click on the Add icon in Request and Allocation	SKIPPED	0.001 s
21	Then Current Budget Code	SKIPPED	0.000 s
22	And select the Budget Year	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
23	Then click on the Branch	SKIPPED	0.001 s
24	And Select Branch checkbox	SKIPPED	0.000 s
25	Then click on the Branch ok button	SKIPPED	0.000 s
26	Then select one currency we need	SKIPPED	0.001 s
27	And Budget Amount for Budget Type Show in Budget type field	SKIPPED	0.000 s
28	And click on the save button	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.002 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014547', ip: '10.1.47.111', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0d3be2297f5a964a0cfdb294aa36cf96, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 97.0.4692.99, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:56880}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:56880/devtoo..., se:cdpVersion: 97.0.4692.99, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 0d3be2297f5a964a0cfdb294aa36cf96
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)
	  at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432)
	  at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		

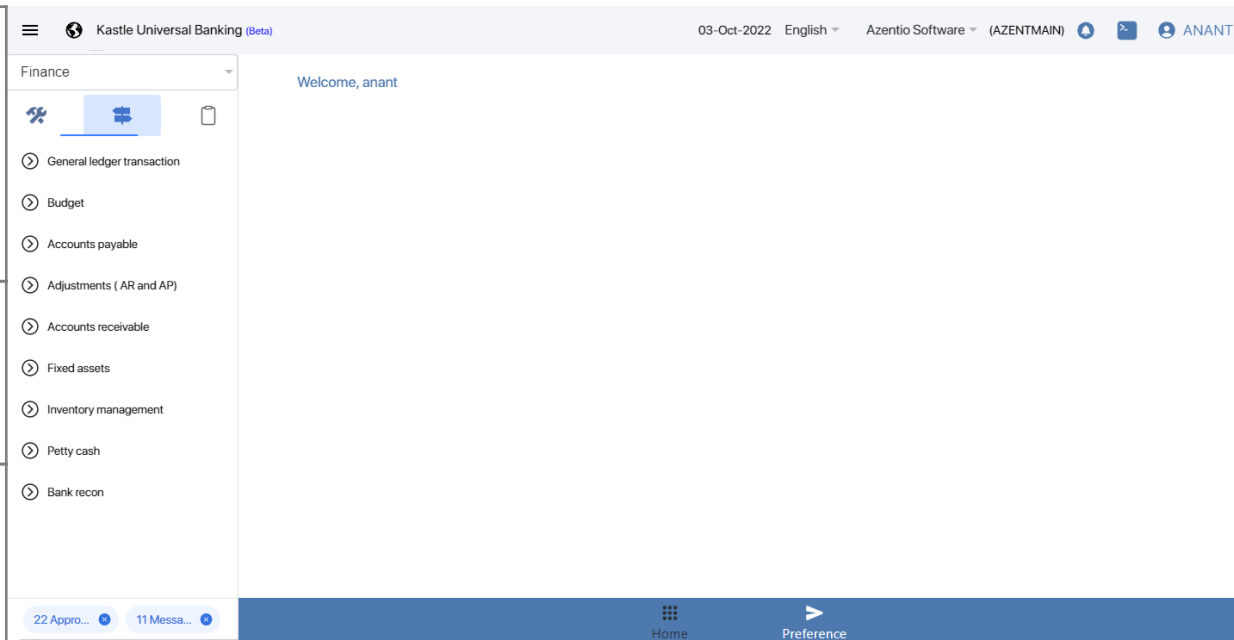| (Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Check the rejected budget can be used	
(F) Check The Azentio UAT Budget Request and Allocation functionaliy	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Check the rejected budget can be used	
(F) Check The Azentio UAT Budget Request and Allocation functionaliy	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Check the rejected budget can be used

(F) Check The Azentio UAT Budget Request and Allocation functionaliy

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Check the rejected budget can be used

(F) Check The Azentio UAT Budget Request and Allocation functionaliy

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Check the rejected budget can be used	
(F) Check The Azentio UAT Budget Request and Allocation functionaliy	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Check the rejected budget can be used	
(F) Check The Azentio UAT Budget Request and Allocation functionaliy	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Check the rejected budget can be used

(F) Check The Azentio UAT Budget Request and Allocation functionaliy

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Check the rejected budget can be used

(F) Check The Azentio UAT Budget Request and Allocation functionaliy

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Check the rejected budget can be used

(F) Check The Azentio UAT Budget Request and Allocation functionaliy

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Check the rejected budget can be used

(F) Check The Azentio UAT Budget Request and Allocation functionaliy

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Check the rejected budget can be used

(F) Check The Azentio UAT Budget Request and Allocation functionaliy

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Check the rejected budget can be used

(F) Check The Azentio UAT Budget Request and Allocation functionaliy

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Check the rejected budget can be used

(F) Check The Azentio UAT Budget Request and Allocation functionaliy

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Check the rejected budget can be used

(F) Check The Azentio UAT Budget Request and Allocation functionaliy