

Cucumber Report

9 Jan 2023, 8:47:24 PM

Start : Jan 09, 8:46:45.533 PM

End : Jan 09, 8:47:22.564 PM

Duration : 37.031 s

Features

Scenarios

Steps

PASSED - 0

FAILED - 1

SKIPPED - 0

PASSED - 0

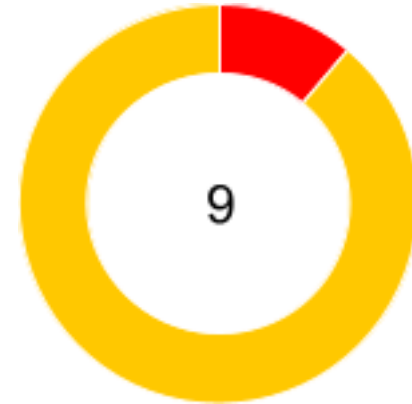
FAILED - 1

SKIPPED - 0

PASSED - 0

FAILED - 1

SKIPPED - 8







#	Feature Name	T	P	F	S	Duration
1	AR/AP Module	1	0	1	0	37.031 s

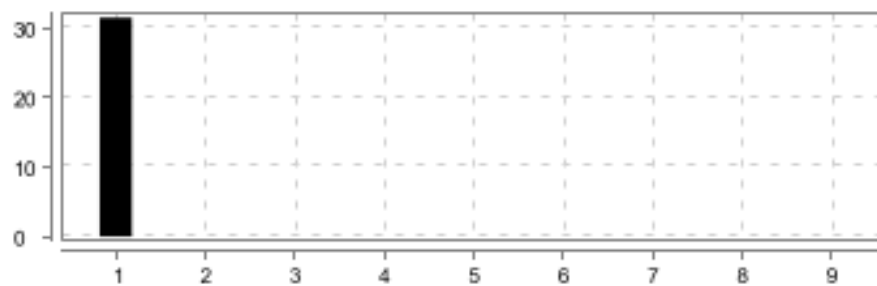



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	AR/AP Module	Verify status for the receipt is auto changed to Deposit	9	0	1	8	37.027 s

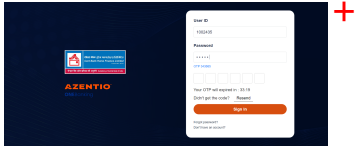
(F)- AR/AP Module

FAILED	DURATION - 37.031 s	Scenarios		Steps	
/ 8:46:45.533 PM // 8:47:22.564 PM /		Total - 1		Total - 9	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 8	

(S)- Verify status for the receipt is auto changed to Deposit

<div>FAILED</div> <div>DURATION - 37.027 s</div>			<div>Steps</div> <div>Total - 9</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 8</div>	
/ 8:46:45.537 PM // 8:47:22.564 PM /				
AR/AP Module				
@AR/AP @KUBS_AR_AP_UAT_010_002_TC_02_01				

#	Step / Hook Details	Status	Duration
1	<p>Given User should go to the kubs url and login as a maker user</p> <pre>org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"/p[contains(text(),'OTP')]} (Session info: chrome=108.0.5359.125) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.22', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [c40caf6bc8cdadf5271afb54943ee0ac, findElement {using=xpath, value=/p[contains(text(),'OTP')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 108.0.5359.125, chrome: {chromedriverVersion: 108.0.5359.71 (1e0e3868ee06..., userDataDir: C:\Users\ININDC~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:50954}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:50954/devtoo..., se:cdpVersion: 108.0.5359.125, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: c40caf6bc8cdadf5271afb54943ee0ac at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)</pre>	FAILED	31.460 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy46.getText(Unknown Source) at stepdefinitions.KUBS_Login.loginToAzentioAppByMaker(KUBS_Login.java:46) at stepdefinitions.ACCOUNTSPAYABLE_VendorContracts. user_should_go_to_the_kubs_url_and_login_as_a_maker_user(ACCOUNTSPAYABLE_VendorContracts.java:47) at ?.User should go to the kubs url and login as a maker user(file:///C:/Users/ININDC00091/git/AzentioAutomationFramework/ DeveshFW_Excel/ARAP_AzentioAutomationFramework_Excel/src/test/java/features/ArAp_2_Excel.feature:1051) * Not displayable characters are replaced by '?'. </pre>		
	<p>AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)</p> <p>screenshot</p> 	PASSED	0.872 s
2	Then select data set ID for verify status of the receipt is auto changed to deposit	SKIPPED	0.000 s
3	And goto accouts Receivable module	SKIPPED	0.001 s
4	And goto accouts receipt module	SKIPPED	0.000 s
5	And click on Add Icon	SKIPPED	0.000 s
6	And fill the all receipt mendatory details	SKIPPED	0.001 s
7	And save the receipt record	SKIPPED	0.000 s
8	Then Click on Update Deposited Cheque Notification	SKIPPED	0.000 s
9	And Select and Submit the Update Deposited Cheque record	SKIPPED	0.001 s

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Verify status for the receipt is auto
changed to Deposit

(F) AR/AP Module



AZENTIO™
ONEBanking

User ID

1002435

Password

.....

OTP 343685

Your OTP will expired in : 33:19

Didn't get the code? [Resend](#)

[Sign In](#)

[Forgot password?](#)

[Don't have an account?](#)