Cucumber Report

Start : Feb 22, 3:17:19.991 AM	End : Feb 22, 3:21:21.073 AM	Duration : 4 m 1.082 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 4 FAILED - 1 SKIPPED - 0

#	Feature Name	T	P	F	S	Duration
1	AR/AP Module	1	0	1	0	4 m 1.082 s
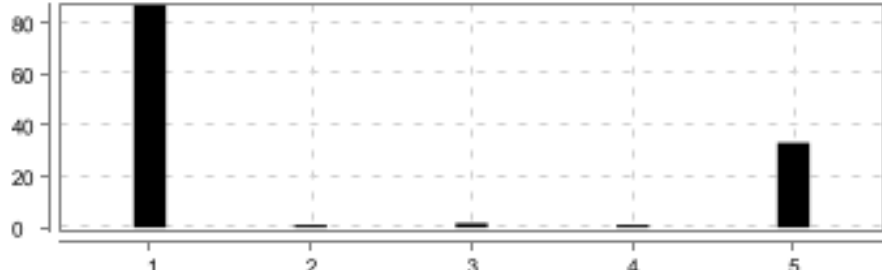
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	AR/AP Module	Create Bill against PO & GRN for above vendor	5	4	1	0	4 m 1.049 s
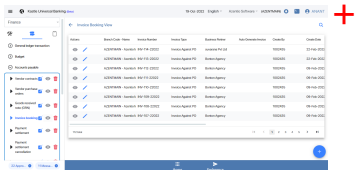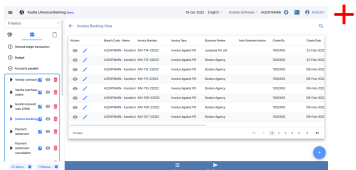
(F)- AR/AP Module

FAILED	DURATION - 4 m 1.082 s		Scenarios		Steps	
/ 3:17:19.991 AM // 3:21:21.073 AM /			Total - 1	1	Total - 5	5
			Pass - 0		Pass - 4	
			Fail - 1		Fail - 1	
			Skip - 0		Skip - 0	

(S)- Create Bill against PO & GRN for above vendor

FAILED	DURATION - 4 m 1.049 s		Steps	
/ 3:17:20.023 AM // 3:21:21.072 AM /			Total - 5	5
AR/AP Module			Pass - 4	
@KUBS_AR/AP_UAT_001_001_TC_009			Fail - 1	
			Skip - 0	

#	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	PASSED	1 m 26.974 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	3.769 s
	screenshot		
2	And user should navigate to accounts payable menu	PASSED	1.048 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.365 s
	screenshot		

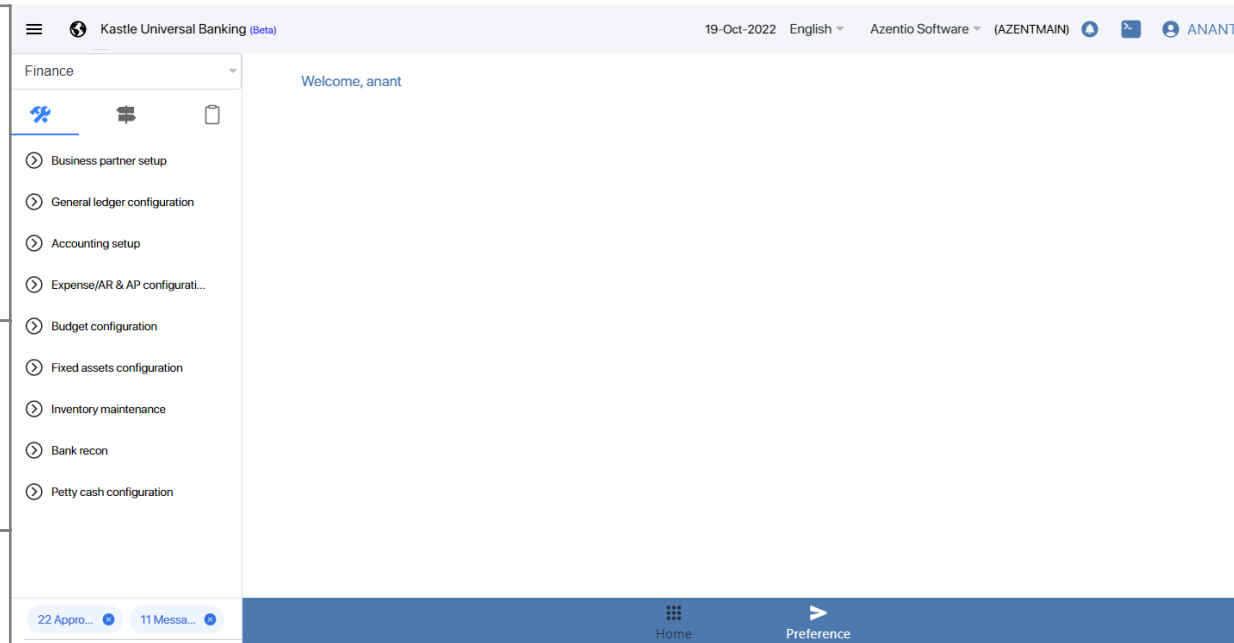| #	Step / Hook Details	Status	Duration
3	When click on eye button of invoice booking	PASSED	1.717 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	1.242 s
	screenshot		
4	And click on add button for invoice booking	PASSED	0.983 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.655 s
	screenshot		
5	And Fill the required fields for invoice booking	FAILED	33.160 s

	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [7bfbe797c612d2c877b3e35ea131ffe8, findElement {using=xpath, value=//div[2]/input[1]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:57653}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:57653/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 7bfbe797c612d2c877b3e35ea131ffe8
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.$Proxy46.isDisplayed(Unknown Source) at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:307) at org.openqa.selenium.support.ui.ExpectedConditions.access$000(ExpectedConditions.java:40) at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:293) at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:290) at org.openqa.selenium.support.ui.ExpectedConditions$23.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions$23.apply(ExpectedConditions.java:656) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:208) at helper.WaitHelper.waitForElement(WaitHelper.java:79) at stepdefinitions.ACCOUNTSPAYABLE_InvoiceBooking.fill_the_required_fields_for_invoice_booking(ACCOUNTSPAYABLE_InvoiceBooking.java:479) at ?.Fill the required fields for invoice booking(file:///C:/Users/inindc00091/git/repository/Devesh_AzentioFramework/src/test/java/features/ArAp_InvoiceBooking.feature:10) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	FAILED	38.021 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [7bfbe797c612d2c877b3e35ea131ffe8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:57653}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:57653/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 7bfbe797c612d2c877b3e35ea131ffe8 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347) at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	10.005 s

	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [7bfbe797c612d2c877b3e35ea131ffe8, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:57653}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:57653/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 7bfbe797c612d2c877b3e35ea131ffe8
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)
	  at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432)
	  at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

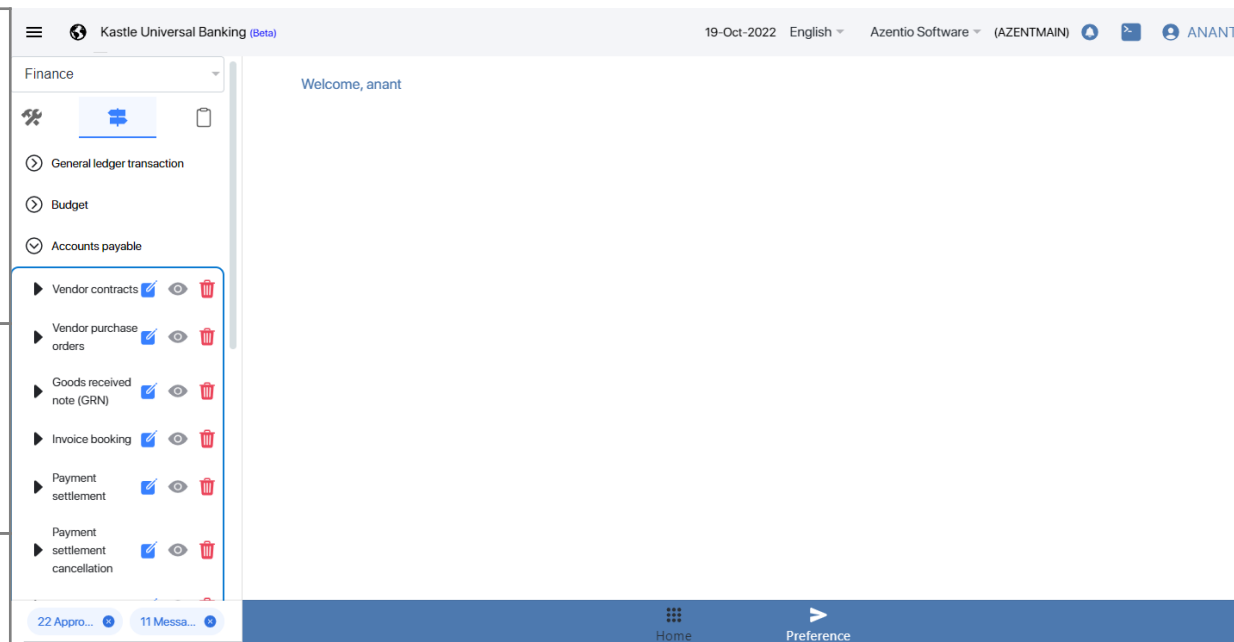(S) Create Bill against PO & GRN for above vendor

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Create Bill against PO & GRN for above vendor

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Create Bill against PO & GRN for above vendor

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Create Bill against PO & GRN for above vendor

(F) AR/AP Module