


FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	AR/AP Module	1	0	1	0	1 m 33.379 s

SCENARIOS SUMMARY -- 3 --

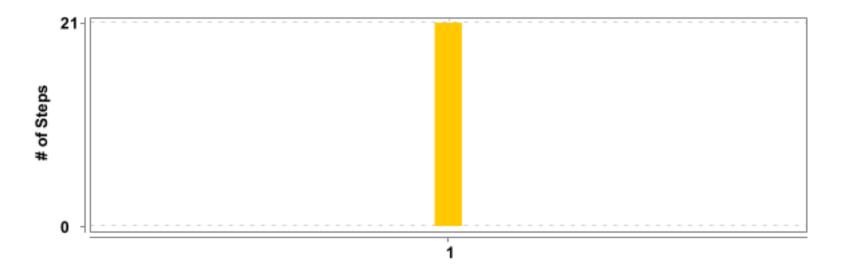


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	AR/AP Module	Create Bill against PO & GRN for above vendor	21	0	0	21	1 m 33.283 s

DETAILED SECTION -- 4 --

(F)- AR/AP Module

FAILED	DURATION - 1 m 33.379 s	Scenarios		Steps	
/ 4.4.40.00 C20 D	NA // 44 - 40 - 40 - 040 - DA4 /	Total - 1		Total - 21	
/ 11:48:06.639 P	PM // 11:49:40.018 PM /	Pass - 0	1	Pass - 0	21
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 21	

(S)- Create Bill against PO & GRN for above vendor

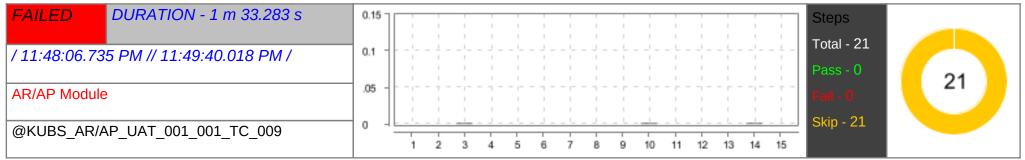

Step / Hook Details	Status	Duration
BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario)	FAILED	1 m 32.639 s
org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: unknown error: DevToolsActivePort file doesn't exist Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os. name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:62) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:244) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:166) at org.openqa.selenium.remote.RemoteWebDriver.	FAILED	1 m 32.639 s
at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:86)</init>		
	BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario) org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: unknown error: DevToolsActivePort file doesn't exist Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os. name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}], at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:62) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(PriverCommandExecutor.java:244) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:266) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:166) at org.openqa.selenium.chromium.ChromiumDriver. <init>(ChromiumDriver.java:99)</init>	BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario) org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: unknown error: DevToolsActivePort file doesn't exist Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os. name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:126) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:62) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:62) at org.openqa.selenium.remote.Service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:156) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:244) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:244) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:246) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:260) at org.openqa.selenium.chromiumDriver.startSession(RemoteWebDriver.java:360) at org.openqa.selenium.chromiumDriver.startSession(RemoteWebDriver.java:360) at org.openqa.selenium.chromiumDriver.startSession(RemoteWebDriver.java:360) at org.openqa.selenium.chrome.ChromeDriver.startSession(RemoteWebDriver.java:360) at org.openqa.selenium.chromiumDriver.startSession(RemoteWebDriver.java:360) at org.openqa.selenium.chrome.ChromeDriver.startSession(RemoteWebDriver.java:360) at org.openqa.selenium.chrome.ChromeDriver.startSes

DETAILED SECTION -- 5 --

#	Step / Hook Details	Status	Duration
	at resources.BaseClass.initializeDriver(BaseClass.java:28) at stepdefinitions.HooksClass.browserSetup(HooksClass.java:32)		
1	Given User should go to the kubs url and login as a maker user	SKIPPED	0.000 s
2	And user should navigate to accounts payable menu	SKIPPED	0.000 s
3	When click on eye button of invoice booking	SKIPPED	0.001 s
4	And click on add button for invoice booking	SKIPPED	0.000 s
5	And Fill the required fields for invoice booking	SKIPPED	0.000 s
6	Then Save and submit the invoice billing	SKIPPED	0.000 s
7	And User should go to the kubs url and login as a reviewer user	SKIPPED	0.000 s
8	Then Click on notification button in reviewer	SKIPPED	0.000 s
9	And approve the record by the reviewer user	SKIPPED	0.000 s
10	Given User should go to the kubs url and login as a checker user	SKIPPED	0.001 s
11	And Click on security management in checker	SKIPPED	0.000 s
12	Then Click on open pool in checker	SKIPPED	0.000 s
13	And Click on claim button in checker	SKIPPED	0.000 s
14	And capture claimed status	SKIPPED	0.001 s
15	Then click on notification in checker	SKIPPED	0.000 s
16	Then checker should approved the invoice billing	SKIPPED	0.000 s
17	Given User should go to the kubs url and login as a maker user	SKIPPED	0.001 s
18	And user should navigate to accounts payable menu	SKIPPED	0.000 s
19	When click on eye button of invoice booking	SKIPPED	0.000 s
20	Then Get the invoice status	SKIPPED	0.001 s
21	And maker should logout	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.416 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.close()" because "this.driver" is null at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		