Cucumber Report

Start : Jan 14, 12:57:32.611 PM	End : Jan 14, 12:58:26.855 PM	Duration : 54.244 s
Features	Scenarios	Steps
PASSED - 1 FAILED - 0 SKIPPED - 0	PASSED - 1 FAILED - 0 SKIPPED - 0	PASSED - 5 FAILED - 0 SKIPPED - 0

#	Feature Name	T	P	F	S	Duration
1	user create login in to Budget and planning UAT files	1	1	0	0	54.244 s
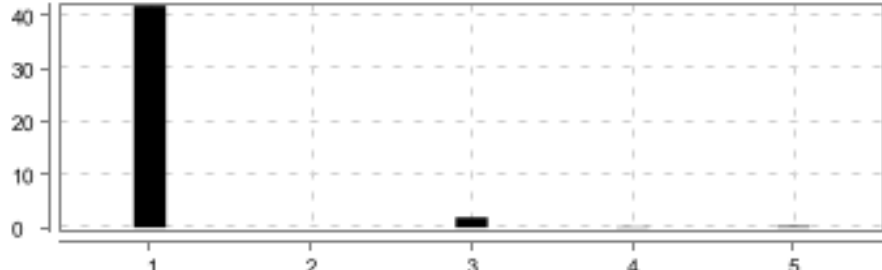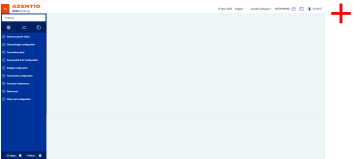
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	user create login in to Budget and planning UAT files	user login to maker	5	5	0	0	54.237 s
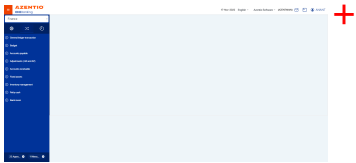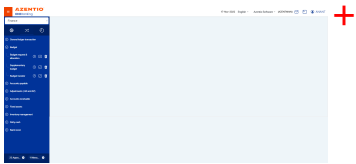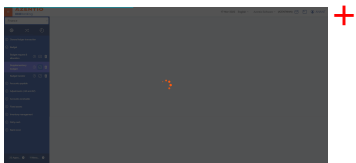
(F)- user create login in to Budget and planning UAT files

PASSED	DURATION - 54.244 s	Scenarios		Steps	
/ 12:57:32.611 PM // 12:58:26.855 PM /		Total - 1 Pass - 1 Fail - 0 Skip - 0	1	Total - 5 Pass - 5 Fail - 0 Skip - 0	5

(S)- user login to maker

PASSED	DURATION - 54.237 s		Steps	
/ 12:57:32.617 PM // 12:58:26.854 PM /			Total - 5 Pass - 5 Fail - 0 Skip - 0	5
user create login in to Budget and planning UAT files				
@KUBS_BP_UAT_005_005_4				

#	Step / Hook Details	Status	Duration
1	Given navigate to given url and login with maker credentials	PASSED	41.883 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.805 s
	screenshot		
	+		
2	And user update the Excel sheet testdata for Budget and planning Allocation5	PASSED	0.012 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.490 s
	screenshot		
	+		

#	Step / Hook Details	Status	Duration
3	And maker should navigate to the budget module UAT	PASSED	1.890 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.243 s
4	And maker click on budget field UAT	PASSED	0.118 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.248 s
5	When maker click on budget supplementary eye icon UAT	PASSED	0.278 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.863 s

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
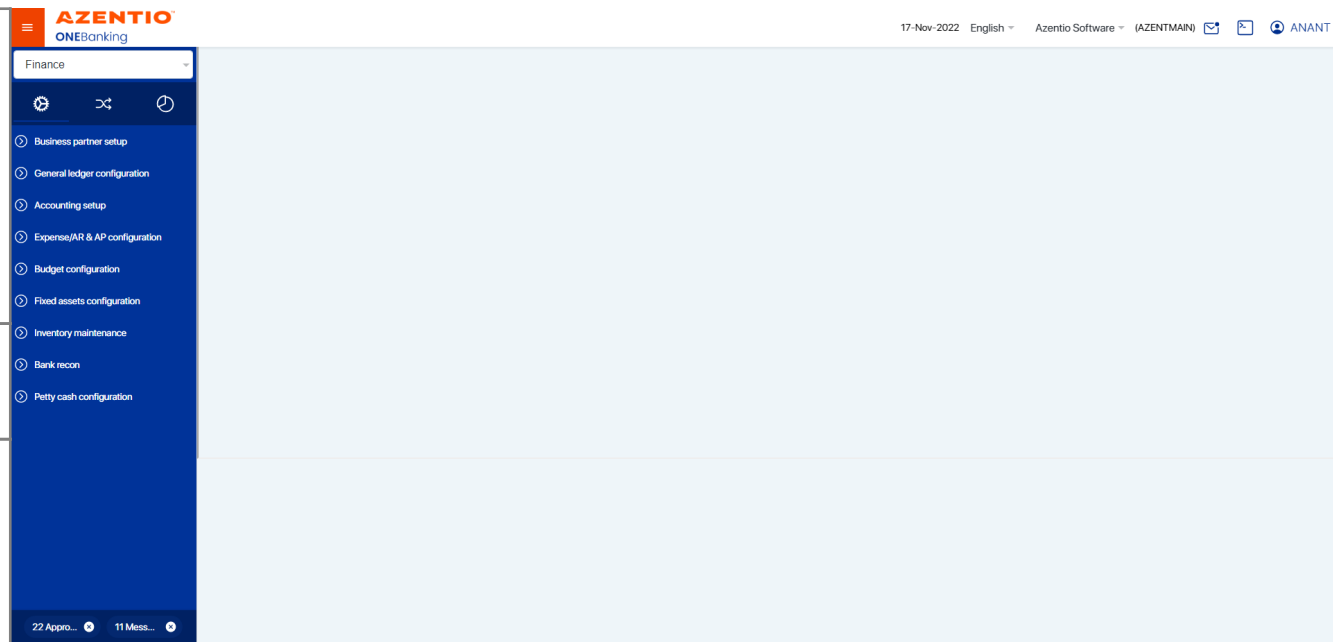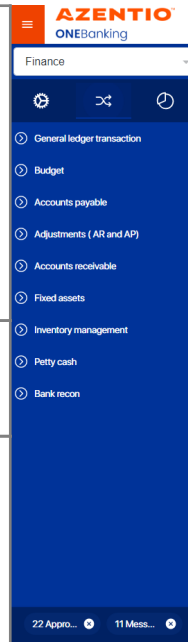java.Scenario)

(S) user login to maker

(F) user create login in to Budget and
planning UAT files

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) user login to maker

(F) user create login in to Budget and
planning UAT files

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) user login to maker

(F) user create login in to Budget and planning UAT files

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) user login to maker
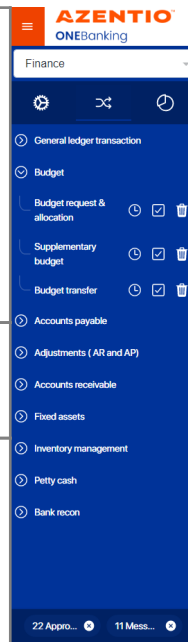
(F) user create login in to Budget and planning UAT files

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)
(S) user login to maker
(F) user create login in to Budget and planning UAT files