

Cucumber Report

Nov 7, 2022, 7:03:34 PM

Start : Nov 07, 6:58:52.801 PM

End : Nov 07, 7:03:33.301 PM

Duration : 4 m 40.500 s

Features


Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0


PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 4
FAILED - 0
SKIPPED - 12

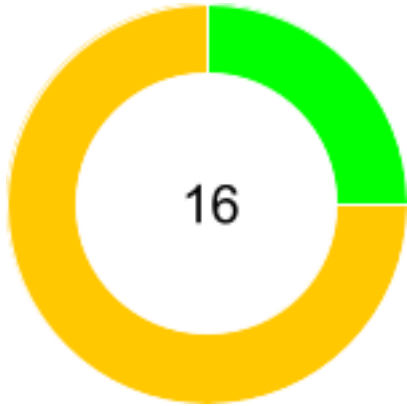





#	Feature Name	T	P	F	S	Duration
1	AR/AP Module	1	0	1	0	4 m 40.500 s


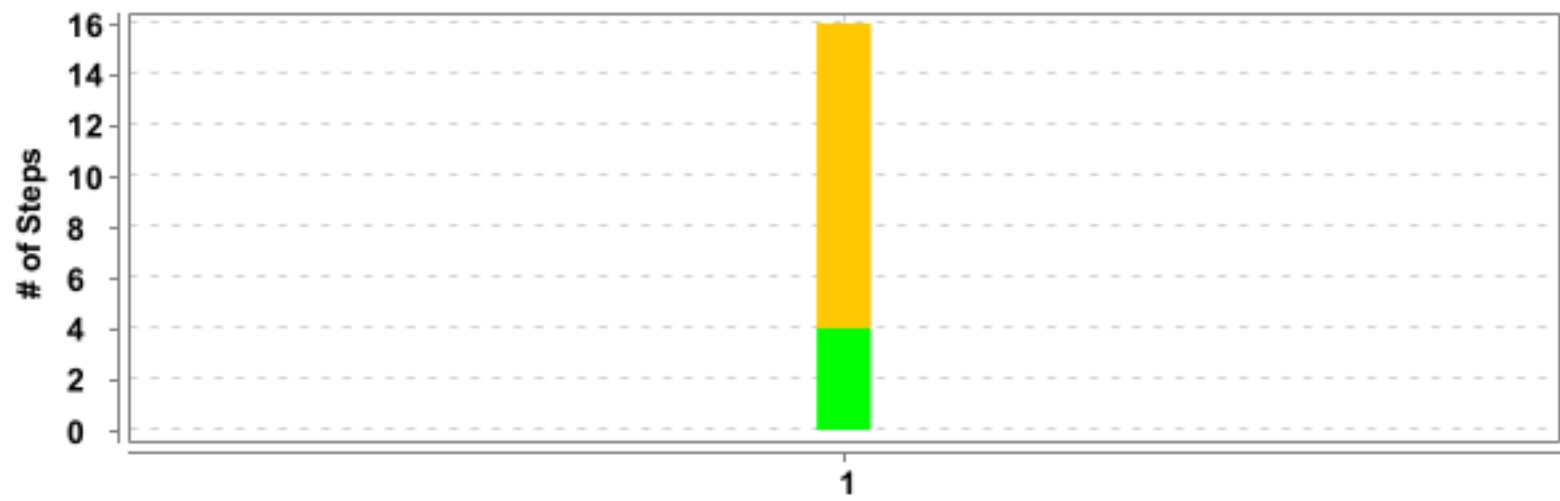



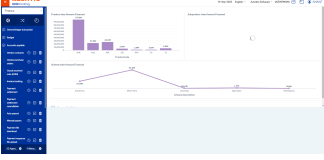
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	AR/AP Module	Create GRN against above create PO for above vendor	16	4	0	12	4 m 40.496 s


(F)- AR/AP Module

FAILED	DURATION - 4 m 40.500 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 16 Pass - 4 Fail - 0 Skip - 12	
/ 6:58:52.801 PM // 7:03:33.301 PM /					

(S)- Create GRN against above create PO for above vendor
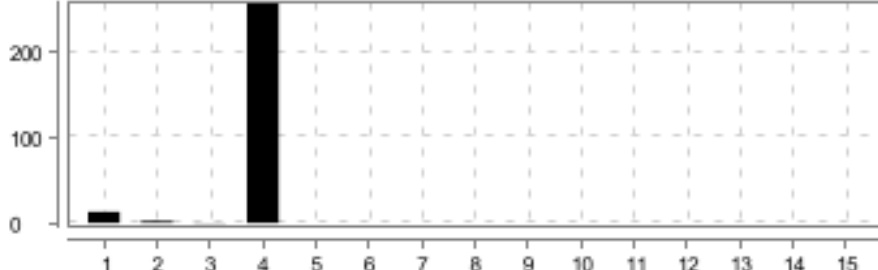
<div>FAILED</div> <div>DURATION - 4 m 40.496 s</div>			<div>Steps</div> <div>Total - 16</div> <div>Pass - 4</div> <div>Fail - 0</div> <div>Skip - 12</div>	
/ 6:58:52.805 PM // 7:03:33.301 PM /				
AR/AP Module				
@KUBS_AR/AP_UAT_001_001_TC_003_01				

#	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	PASSED	12.935 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.383 s
	screenshot		
			
2	And user should navigate to accounts payable menu	PASSED	2.472 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.180 s
	screenshot		
			


#	Step / Hook Details	Status	Duration
3	Then Click on Good Recived Note GRN Eye buutton	PASSED	0.564 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.342 s
	screenshot		
			
4	Then Click on Good Recived Note GRN Add button	PASSED	4 m 16.633 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	FAILED	0.007 s
	org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [ce2745b6812e350c6b981f4615cfd4a8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\ININDC~1\AppData\Local\..., goog:chromeOptions: {debuggerAddress: localhost:60675}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:60675/devtoo..., se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: ce2745b6812e350c6b981f4615cfd4a8 at jdk.internal.reflect.GeneratedConstructorAccessor37.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347) at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		
5	And user update the data set ID for GRN	SKIPPED	0.000 s
6	Then Fill the form for GRN	SKIPPED	0.000 s
7	Then click on the Notification icon	SKIPPED	0.000 s
8	Then Search the grn record	SKIPPED	0.000 s
9	And open the grn record	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
10	Then Click on Item Details Tab	SKIPPED	0.000 s
11	Then Select PO Number	SKIPPED	0.000 s
12	Then Add qty received qty approved	SKIPPED	0.000 s
13	And Save the Record from maker	SKIPPED	0.000 s
14	Then click on the Notification icon	SKIPPED	0.001 s
15	Then store the Reference ID and open the GRN record	SKIPPED	0.000 s
16	Then click submit and enter remark for GRN record	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	4.228 s
	<p>org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [ce2745b6812e350c6b981f4615cfd4a8, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\ININDC~1\AppData\Local\Temp\chrome-remote-debugging-agent\chrome-remote-debugging-agent.exe}, goog:chromeOptions: {debuggerAddress: localhost:60675}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:60675/devtools, se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: ce2745b6812e350c6b981f4615cfd4a8</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432) at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)</p>		

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create GRN against above create PO
for above vendor


(F) AR/AP Module

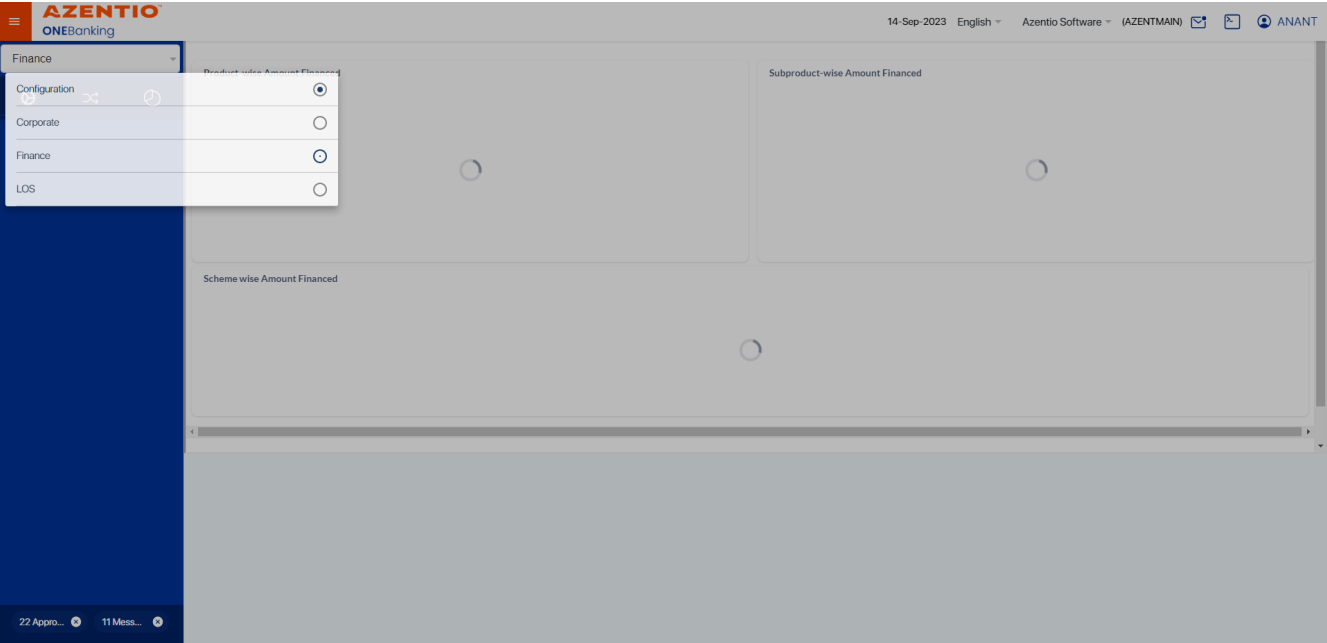

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create GRN against above create PO
for above vendor

(F) AR/AP Module

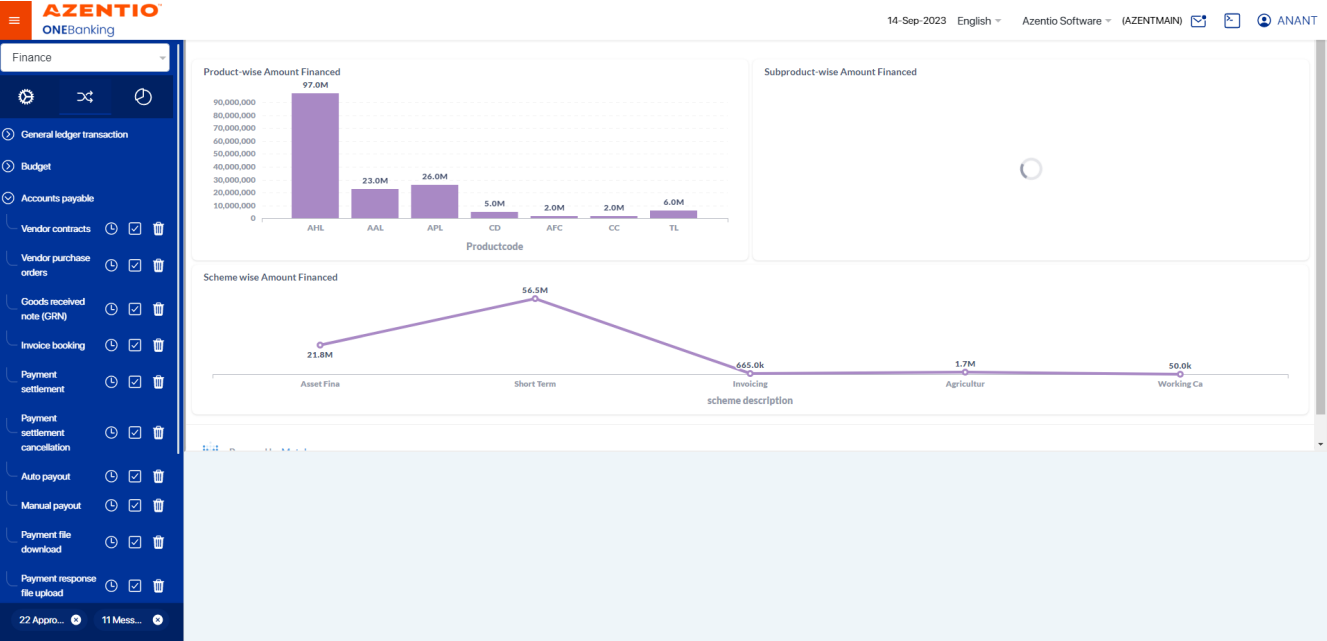

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create GRN against above create PO
for above vendor

(F) AR/AP Module

