Cucumber Report

| Start : Nov 03, 6:06:24.189 PM	End : Nov 03, 6:07:32.321 PM	Duration : 1 m 8.132 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 5 FAILED - 1 SKIPPED - 4

#	Feature Name	T	P	F	S	Duration
1	AR/AP Module	1	0	1	0	1 m 8.132 s
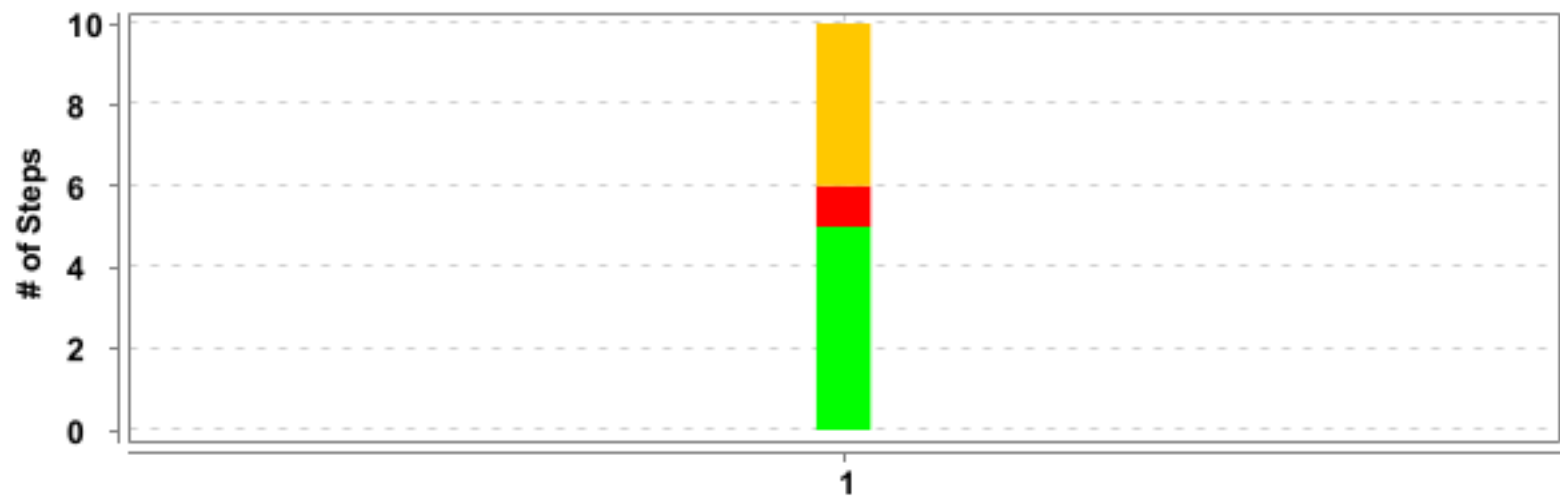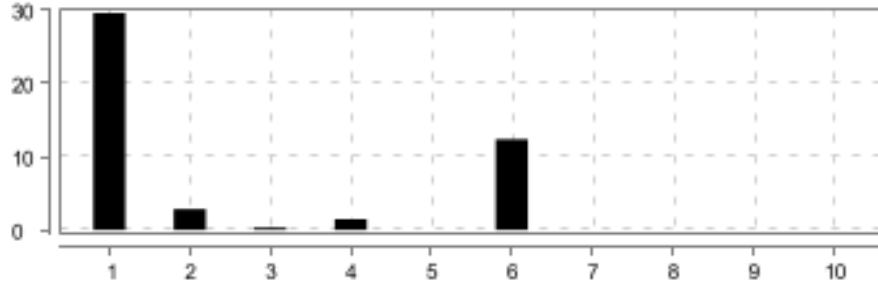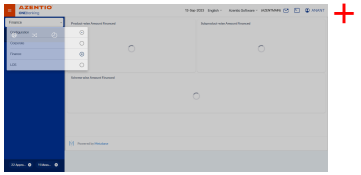
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	AR/AP Module	Create a contract for an active vendor with expense type Purchases	10	5	1	4	1 m 8.124 s
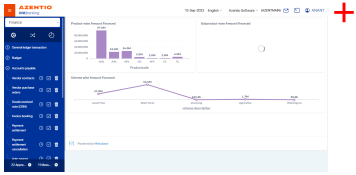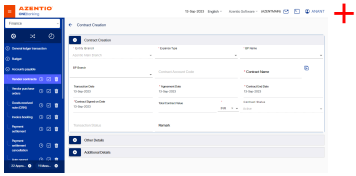
(F)- AR/AP Module

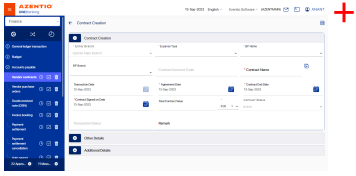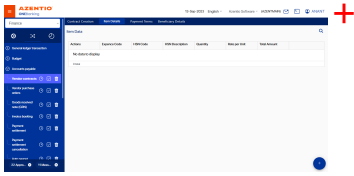| FAILED	DURATION - 1 m 8.132 s	Scenarios		Steps	
/ 6:06:24.189 PM // 6:07:32.321 PM /		Total - 1 Pass - 0 Fail - 1 Skip - 0	1	Total - 10 Pass - 5 Fail - 1 Skip - 4	10

(S)- Create a contract for an active vendor with expense type Purchases

FAILED	DURATION - 1 m 8.124 s		Steps	
/ 6:06:24.197 PM // 6:07:32.321 PM /			Total - 10	
AR/AP Module			Pass - 5	10
@AR/AP @KUBS_AR/AP_UAT_001_001_TC_001_01			Fail - 1 Skip - 4	

#	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	PASSED	29.589 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.483 s
	screenshot		
2	And user should navigate to accounts payable menu	PASSED	2.870 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.196 s
	screenshot		

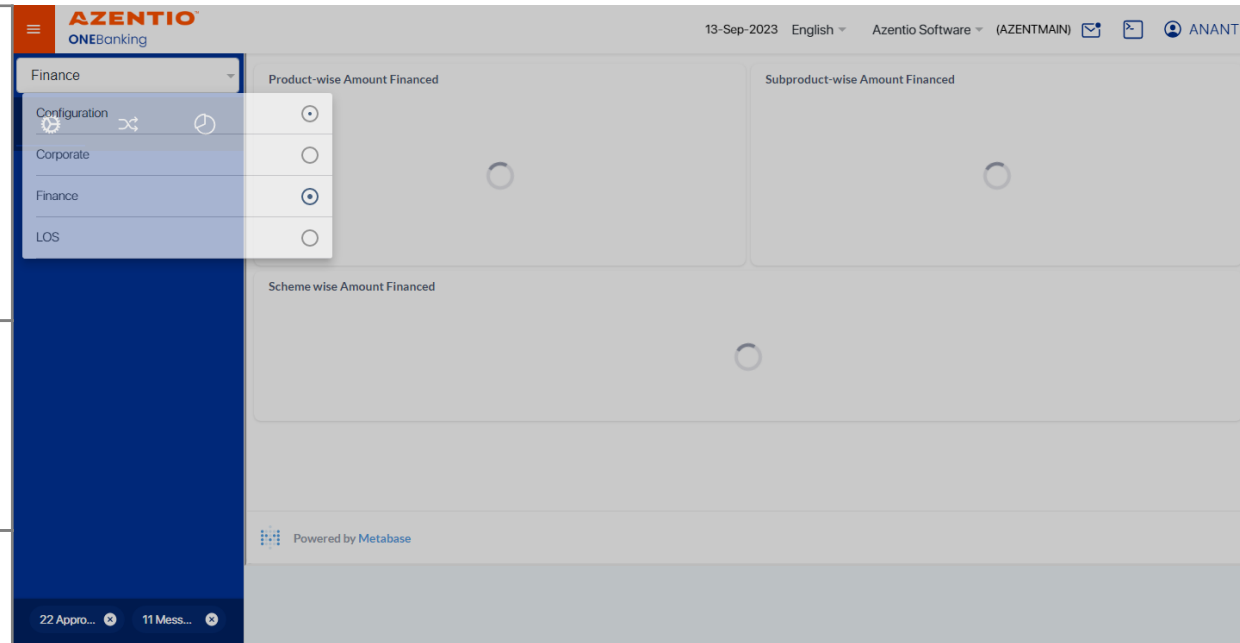| #	Step / Hook Details	Status	Duration
3	When click on eye button of vendor contract	PASSED	0.311 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.826 s
	screenshot		
4	And click on add button to create contract	PASSED	1.495 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.472 s
	screenshot		
5	And user update the data set ID for vendor contract	PASSED	0.005 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.156 s
	screenshot		
6	And Fill the required fields to create contract	FAILED	12.373 s
	org.openqa.selenium.ElementClickInterceptedException: element click intercepted: Element <ion-fab-button _ngcontent-qhh-c277="" id="addBtn" class="ng-star-inserted md ion-activatable ion-focusable hydrated">...</ion-fab-button> is not clickable at point (1402, 706). Other element would receive the click: <div _ngcontent-qhh-c177="" class="ngx-overlay foreground-closing" style="background-color: rgba(40, 40, 40, 0.8); border-radius: 0px;">...</div> (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.		

#	Step / Hook Details	Status	Duration

	openqa.selenium.chrome.ChromeDriver Command: [b83dec43e549b9aad72ec16fcf7c3012, clickElement {id=d3368545-f41a-4f7d-b956-3a5ed14789d0}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:55478}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:55478/devtoo..., se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Element: [[ChromeDriver: chrome on WINDOWS (b83dec43e549b9aad72ec16fcf7c3012)] -> xpath: //ion-fab-button[@id='addBtn']] Session ID: b83dec43e549b9aad72ec16fcf7c3012
	
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	  at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:251)
	  at org.openqa.selenium.remote.RemoteWebElement.click(RemoteWebElement.java:77)
	  at jdk.internal.reflect.GeneratedMethodAccessor7.invoke(Unknown Source)
	  at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
	  at java.base/java.lang.reflect.Method.invoke(Method.java:568)
	  at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:52)
	  at jdk.proxy2/jdk.proxy2.$Proxy46.click(Unknown Source)
	  at stepdefinitions.ACCOUNTSPAYABLE_VendorContracts.fill_the_required_fields_to_create_contract(ACCOUNTSPAYABLE_VendorContracts.java:217)
	  at ?.Fill the required fields to create contract(file:///C:/Users/inindc00089/git/AzentioAutomationFrameworkGit1/AzentioAutomationFramework/src/test/java/features/ArAp1.feature:11)
	* Not displayable characters are replaced by '?'.		

	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.586 s
	screenshot 		
7	And Save the Record from maker	SKIPPED	0.000 s

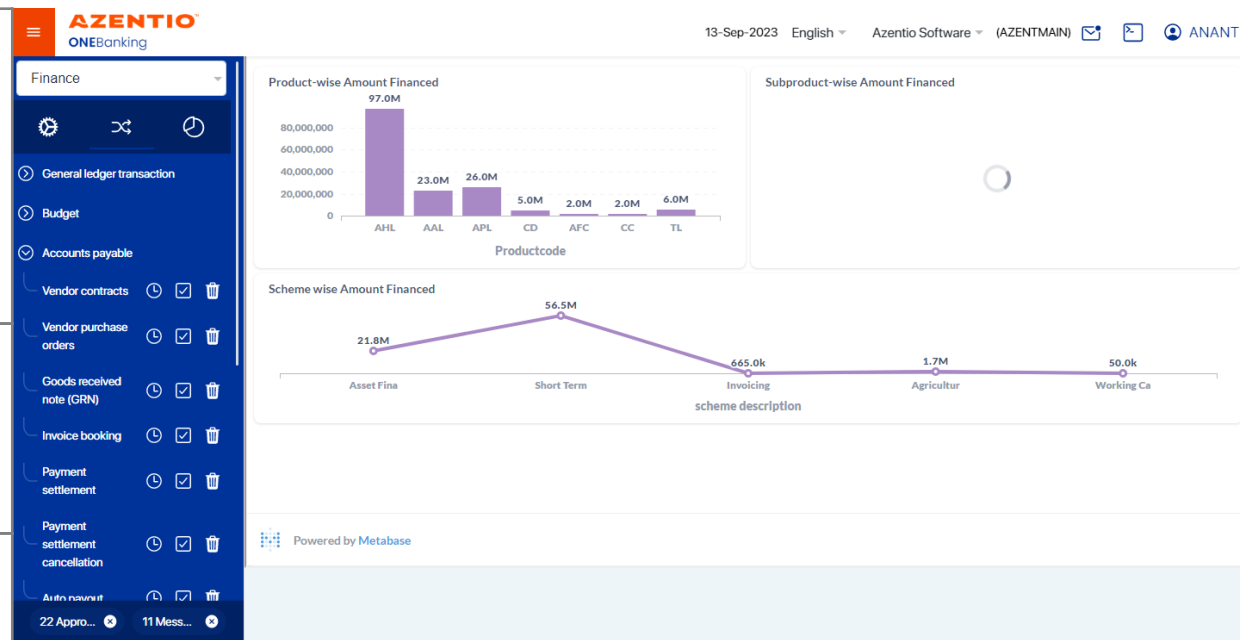| #	Step / Hook Details	Status	Duration
8	Then click on the Notification icon	SKIPPED	0.000 s
9	Then store the Reference ID and open the vendor contract record	SKIPPED	0.001 s
10	Then click submit and enter remark for vendor contract	SKIPPED	0.000 s

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Create a contract for an active vendor with expense type Purchases

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Create a contract for an active vendor with expense type Purchases

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a contract for an active vendor
with expense type Purchases

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a contract for an active vendor
with expense type Purchases

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a contract for an active vendor with expense type Purchases

(F) AR/AP Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Create a contract for an active vendor with expense type Purchases

(F) AR/AP Module