Cucumber Report

12 Jan 2023, 5:45:05 PM

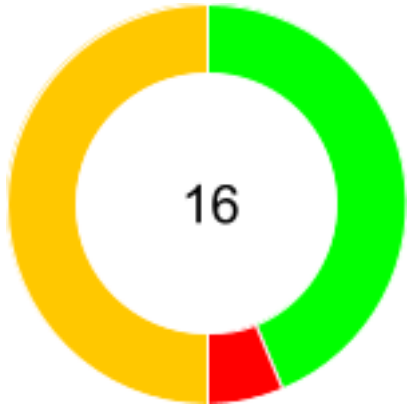| Start : Jan 12, 5:42:35.601 PM	End : Jan 12, 5:44:55.097 PM	Duration : 2 m 19.496 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 7 FAILED - 1 SKIPPED - 8

Features: 1

Scenarios: 1

Steps: 16

Features Pass %: 0 %

Scenarios Pass %: 0 %

Steps Pass %: 43 %

#	Feature Name	T	P	F	S	Duration
1	user create login in to Budget and planning UAT files	1	0	1	0	2 m 19.496 s
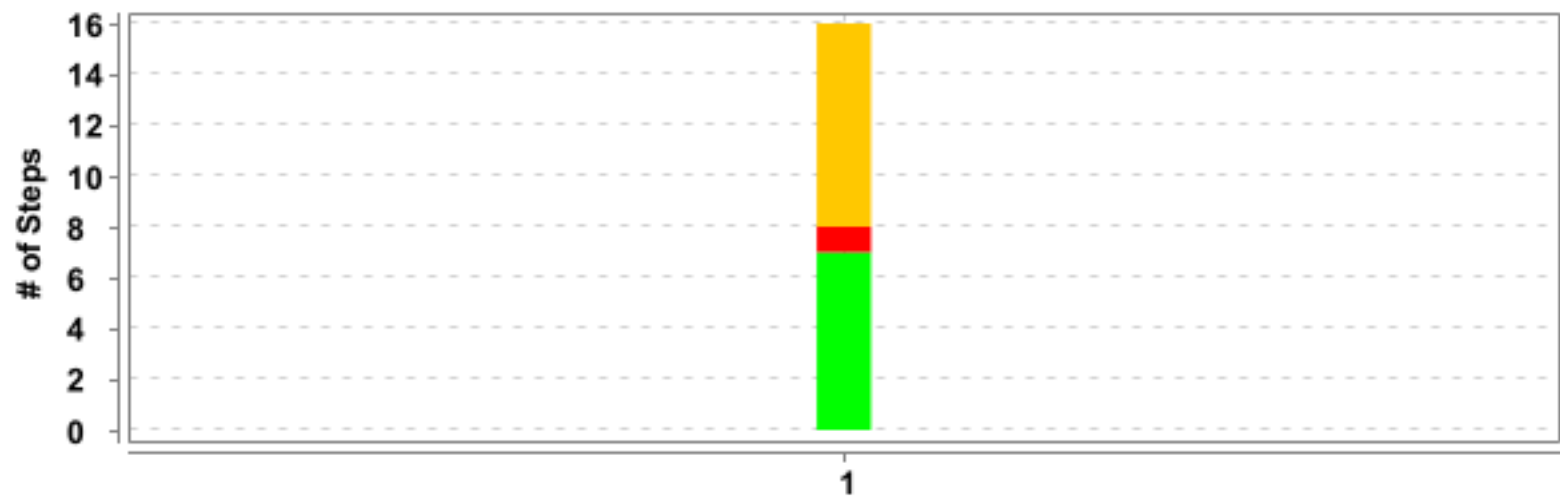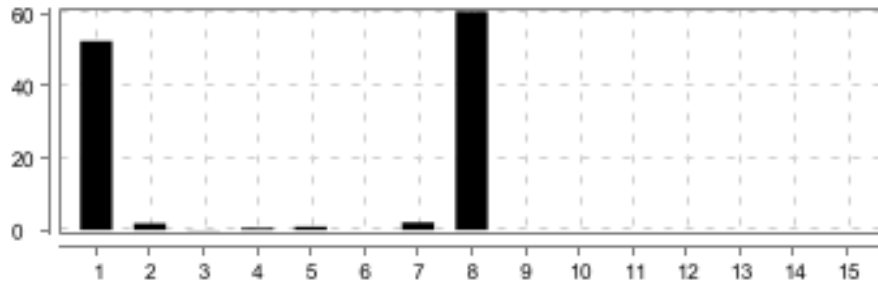
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	user create login in to Budget and planning UAT files	System should able to approve the supplimentary requested budget	16	7	1	8	2 m 19.491 s

(F)- user create login in to Budget and planning UAT files

FAILED	DURATION - 2 m 19.496 s	Scenarios		Steps	
	/ 5:42:35.601 PM // 5:44:55.097 PM /	Total - 1		Total - 16	
		Pass - 0	1	Pass - 7	16
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 8	

(S)- System should able to approve the supplimentary requested budget

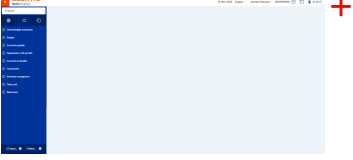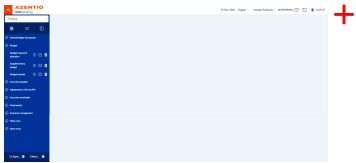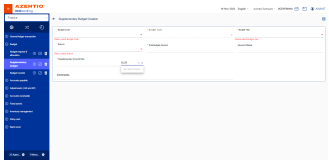| FAILED	DURATION - 2 m 19.491 s		Steps	
	/ 5:42:35.606 PM // 5:44:55.097 PM /		Total - 16	
	user create login in to Budget and planning UAT files		Pass - 7	16
	@SupplementaryBudget_KUBS_BP_UAT_005_00-4		Fail - 1	
			Skip - 8	

#	Step / Hook Details	Status	Duration
1	Given navigate to given url and login with maker credentials	PASSED	52.436 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	1.015 s
	screenshot		
	+		
2	And maker should navigate to the budget module UAT	PASSED	1.829 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.285 s
	screenshot		
	+		

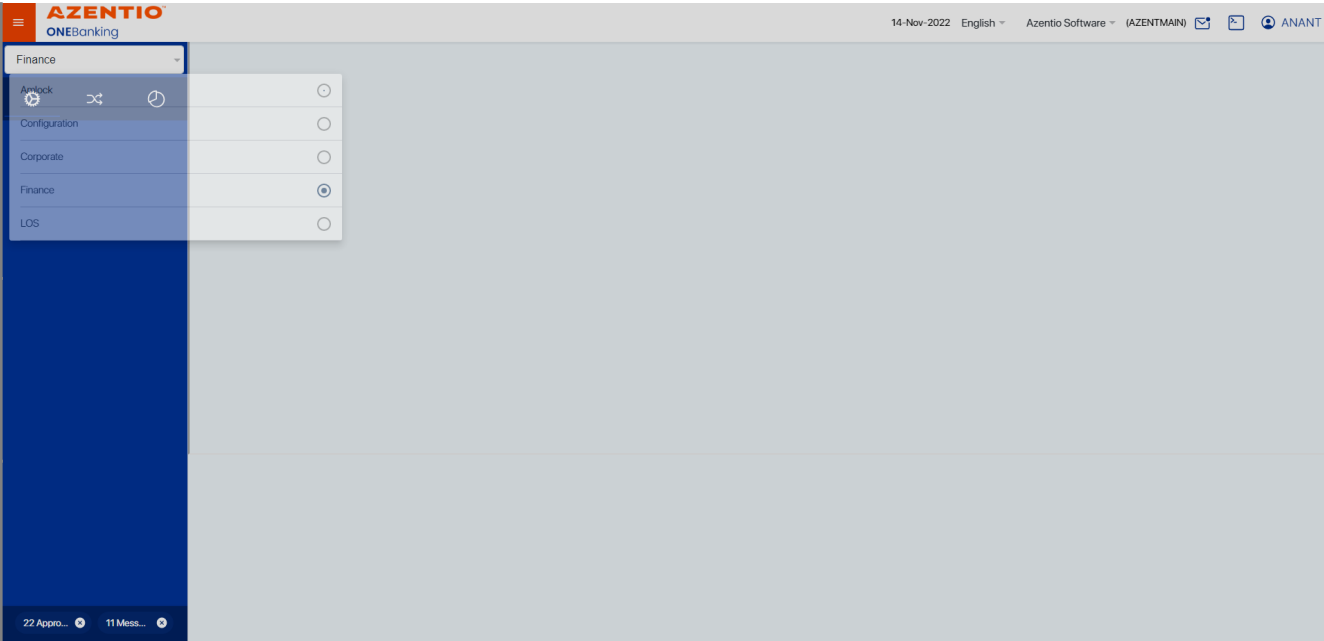| #	Step / Hook Details	Status	Duration
3	And maker click on budget field UAT	PASSED	0.139 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.243 s
	screenshot		
4	When maker click on budget supplementary eye icon UAT	PASSED	0.531 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.858 s
	screenshot		
5	And click on add button on budget supplementary view page UAT	PASSED	0.956 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.323 s
	screenshot		
6	And user update the Excel sheet testdata for Budget and planning Allocation4	PASSED	0.007 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.422 s
	screenshot		
7	Then fill the input fields UAT	PASSED	2.055 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.296 s
	screenshot		

#	Step / Hook Details	Status	Duration
8	Then fill apportion amount and save the record UAT	FAILED	1 m 0.590 s

	org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=108.0.5359.125) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.49', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.4.1' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [f974eef5c6e4455f6636ad0205bcfe83, findElement {using=xpath, value=//ion-row//datatable-row-wrapper//datatable-body-row//div[2]//datatable-body-cell[3]//div//app-kub-currency//input}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 108.0.5359.125, chrome: {chromedriverVersion: 108.0.5359.71 (1e0e3868ee06..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:62990}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:62990/devtoo..., se:cdpVersion: 108.0.5359.125, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: f974eef5c6e4455f6636ad0205bcfe83
	    at jdk.internal.reflect.GeneratedConstructorAccessor40.newInstance(Unknown Source)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	    at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	    at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373)
	    at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70)
	    at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39)
	    at jdk.proxy2/jdk.proxy2.$Proxy46.toString(Unknown Source)
	    at java.base/java.lang.String.valueOf(String.java:4218)
	    at java.base/java.lang.StringBuilder.append(StringBuilder.java:173)
	    at org.openqa.selenium.support.ui.ExpectedConditions$10.toString(ExpectedConditions.java:298)
	    at java.base/java.lang.String.valueOf(String.java:4218)
	    at java.base/java.lang.StringBuilder.append(StringBuilder.java:173)
	    at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:229)
	    at helper.WaitHelper.waitForElementToVisibleWithFluentWait(WaitHelper.java:102)		

#	Step / Hook Details	Status	Duration
	at stepdefinitions.Budgetandplanningsupplementary.fill_apportion_amount_and_save_the_record_uat(Budgetandplanningsupplementary.java:932) at ?.fill apportion amount and save the record UAT(file:///C:/Users/ININDC00075/git/Arshath_Excel_AzentioAutomationFramework/AzentioAutomationFramework_ARAP_Excel_Arshath/src/test/java/features/Budgetandplanning.feature:136) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	FAILED	0.051 s
	org.openqa.selenium.NoSuchWindowException: no such window: target window already closed from unknown error: web view not found (Session info: chrome=108.0.5359.125) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.49', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.4.1' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [f974eef5c6e4455f6636ad0205bcfe83, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 108.0.5359.125, chrome: {chromedriverVersion: 108.0.5359.71 (1e0e3868ee06..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:62990}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:62990/devtoo..., se:cdpVersion: 108.0.5359.125, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: f974eef5c6e4455f6636ad0205bcfe83 at jdk.internal.reflect.GeneratedConstructorAccessor40.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347) at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		
9	And click notification button	SKIPPED	0.002 s
10	Then click on the search button	SKIPPED	0.000 s
11	And serach the budget supplimentory sub module name	SKIPPED	0.000 s
12	Then choose first record in the notification record4	SKIPPED	0.000 s
13	And click on Submit button	SKIPPED	0.001 s
14	Then enter remark in confirmation alertss	SKIPPED	0.000 s
15	Then click on submit button in alert	SKIPPED	0.001 s
16	And capture the reviewer ID in pop up which is open when we submit our record in maker stagesss	SKIPPED	0.001 s

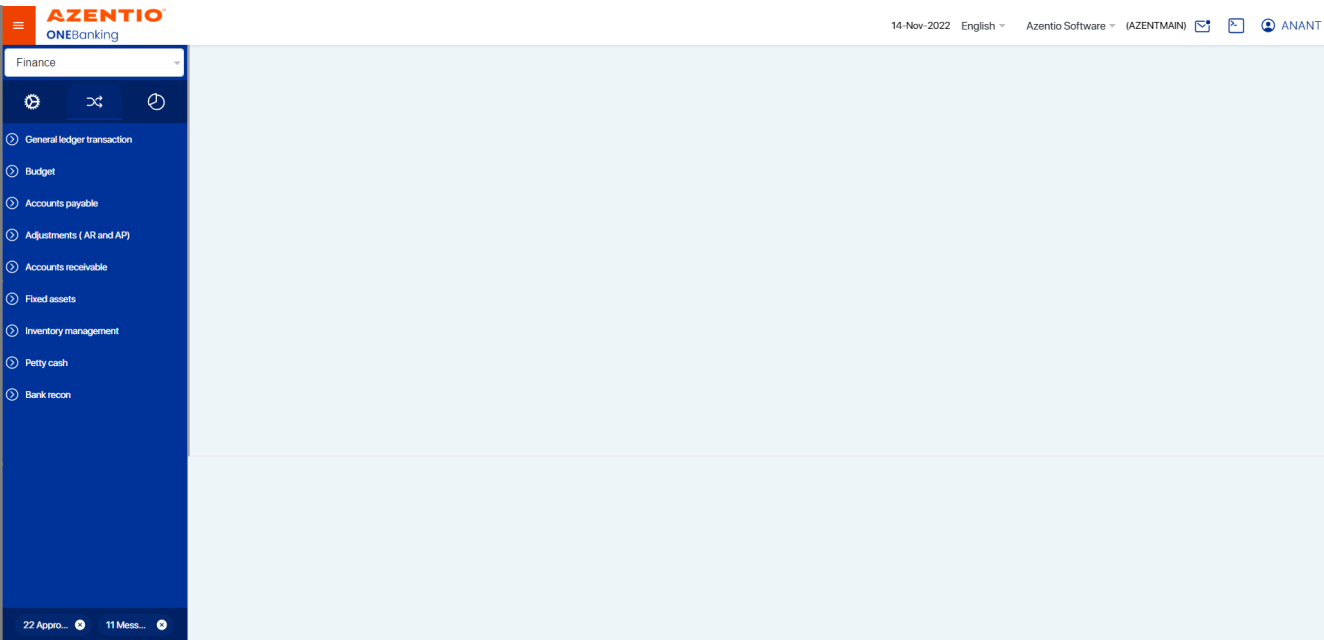| (Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) System should able to approve the supplimentary requested budget	
(F) user create login in to Budget and planning UAT files	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) System should able to approve the supplimentary requested budget	
(F) user create login in to Budget and planning UAT files	

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should able to approve the
supplimentary requested budget

(F) user create login in to Budget and
planning UAT files

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should able to approve the
supplimentary requested budget

(F) user create login in to Budget and
planning UAT files

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should able to approve the supplimentary requested budget

(F) user create login in to Budget and planning UAT files

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should able to approve the supplimentary requested budget

(F) user create login in to Budget and planning UAT files

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should able to approve the
supplimentary requested budget

(F) user create login in to Budget and
planning UAT files