Cucumber Report

Start : May 17, 12:54:55.550 PM	**End : May 17, 12:55:38.042 PM**	**Duration : 42.492 s**
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 6 FAILED - 0 SKIPPED - 0

#	Feature Name	T	P	F	S	Duration
1	To verify user can able to do transaction in gl2 moduyle	1	0	1	0	42.492 s
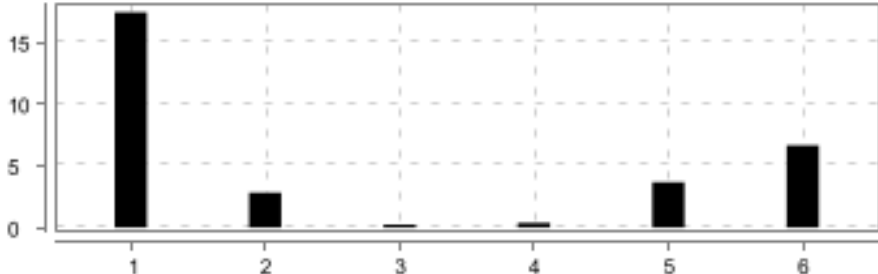
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	To verify user can able to do transaction in gl2 moduyle	Check the trial balance summary	6	6	0	0	42.485 s

(F)- To verify user can able to do transaction in gl2 moduyle

FAILED	*DURATION - 42.492 s*	Scenarios	
		Total - 1	
/ 12:54:55.550 PM // 12:55:38.042 PM /		Pass - 0	
		Fail - 1	
		Skip - 0	

Scenarios: Total - 1, Pass - 0, Fail - 1, Skip - 0 → **1**

Steps: Total - 6, Pass - 6, Fail - 0, Skip - 0 → **6**

(S)- Check the trial balance summary

FAILED	*DURATION - 42.485 s*
/ 12:54:55.557 PM // 12:55:38.042 PM /	
To verify user can able to do transaction in gl2 moduyle	
@KUBS_GL2_UAT_008_008 @GL2 @Report	

Steps: Total - 6, Pass - 6, Fail - 0, Skip - 0 → **6**

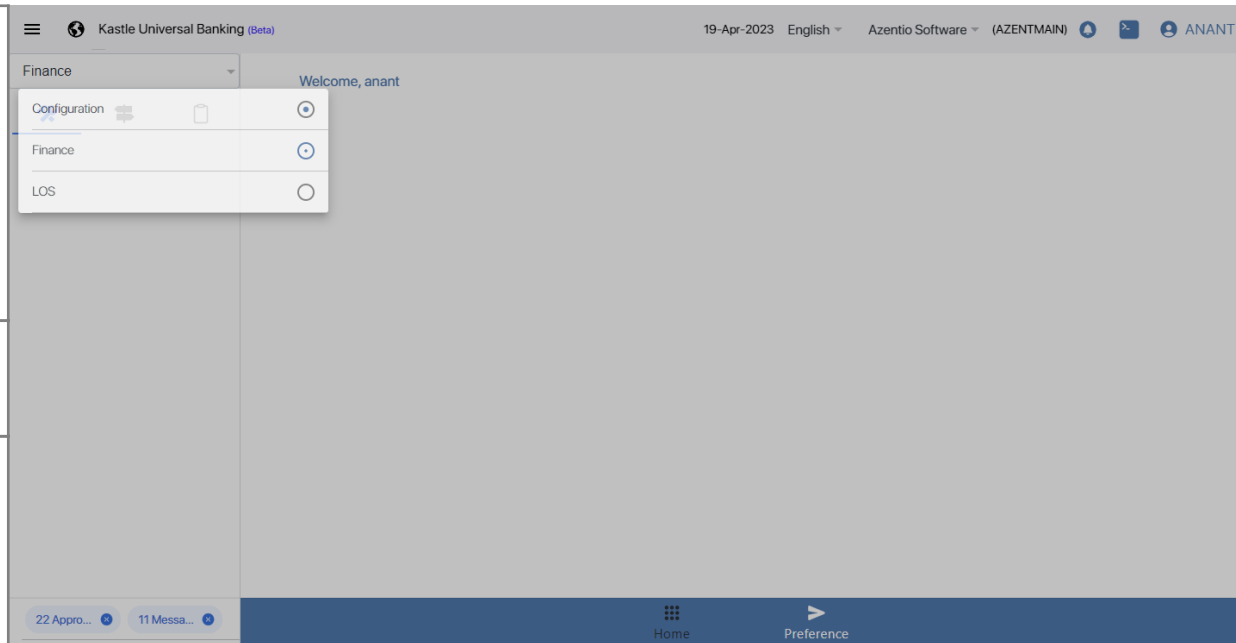| #	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	PASSED	17.413 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.287 s
	screenshot		
	+		
2	Then click on report icon	PASSED	2.813 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.219 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	And user should navigate to financial reporting menu	PASSED	0.250 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.256 s
	screenshot		
4	Then click on temp grid button of Trial Balance report summarized	PASSED	0.382 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.255 s
	screenshot		
5	And fill the required field of Trial Balance report summarized	PASSED	3.682 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.198 s
	screenshot		
6	Then click on view button to view the report of Trial balance summary	PASSED	6.662 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	FAILED	0.006 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014584', ip: '10.1.47.109', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir:		

#	Step / Hook Details	Status	Duration

	C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:65395}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:65395/devtoo..., se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)
	  at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347)
	  at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		

	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.001 s

	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014584', ip: '10.1.47.109', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:65395}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:65395/devtoo..., se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true}
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:145)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)
	  at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432)
	  at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
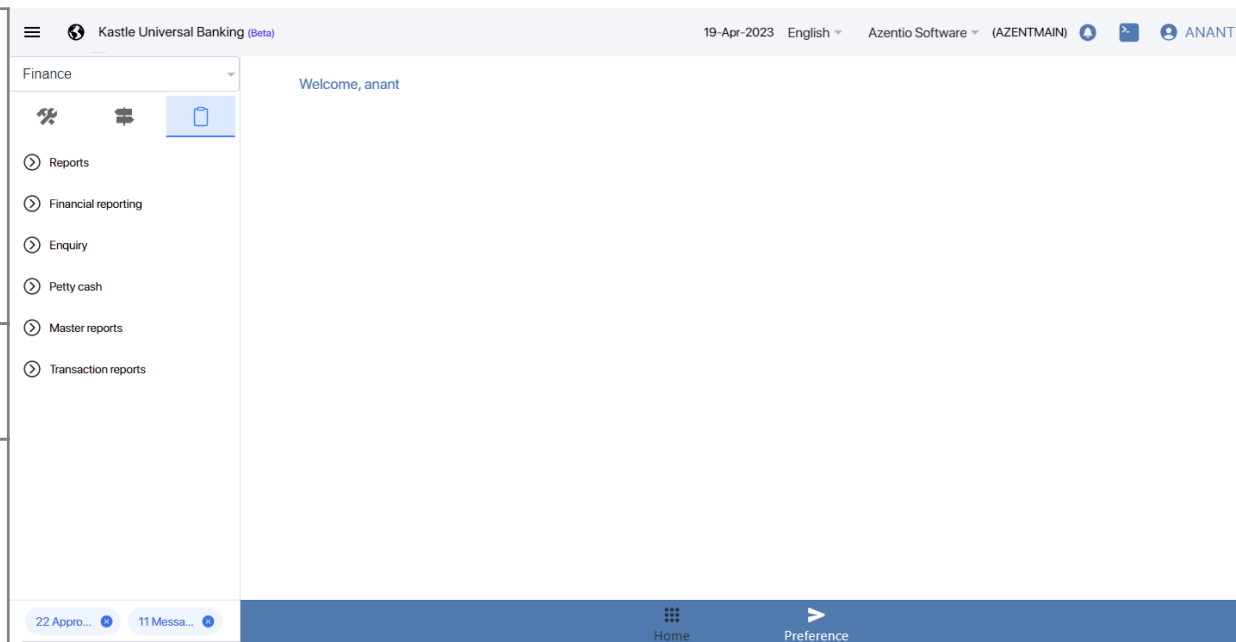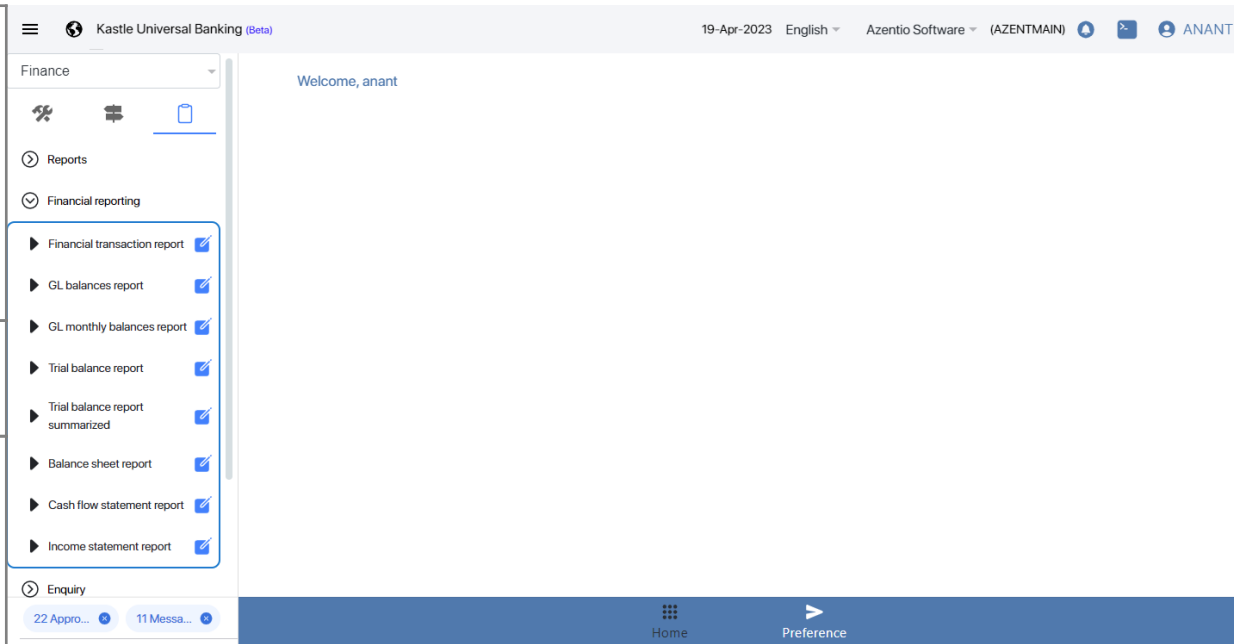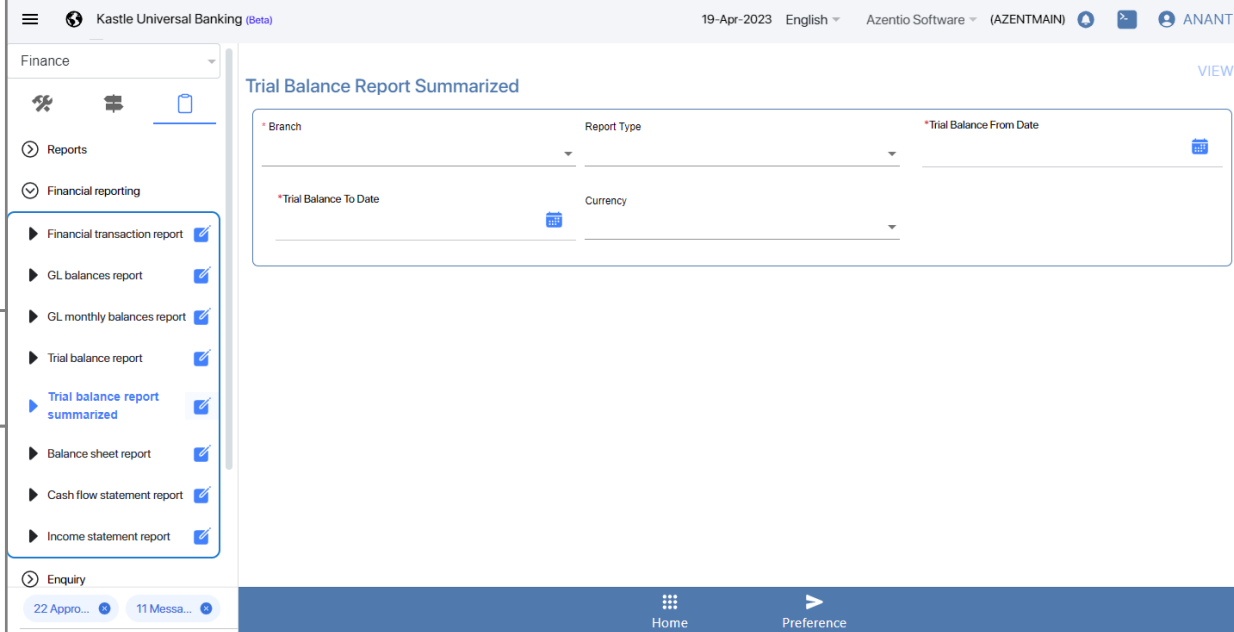java.Scenario)

(S) Check the trial balance summary

(F) To verify user can able to do transaction in gl2 moduyle

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Check the trial balance summary

(F) To verify user can able to do transaction in gl2 moduyle

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Check the trial balance summary

(F) To verify user can able to do transaction in gl2 moduyle

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Check the trial balance summary

(F) To verify user can able to do transaction in gl2 moduyle

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cumber.
java.Scenario)

(S) Check the trial balance summary

(F) To verify user can able to do
transaction in gl2 moduyle