Cucumber Report

| Start : Jan 27, 2:28:24.335 pm	End : Jan 27, 2:28:43.962 pm	Duration : 19.627 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 11 FAILED - 1 SKIPPED - 1

Features: 1

Scenarios: 1

Steps: 13

Features Pass %: 0 %

Scenarios Pass %: 0 %

Steps Pass %: 84 %

#	Feature Name	T	P	F	S	Duration
1	_Check The Azentio UAT functionaliy_	1	0	1	0	19.627 s
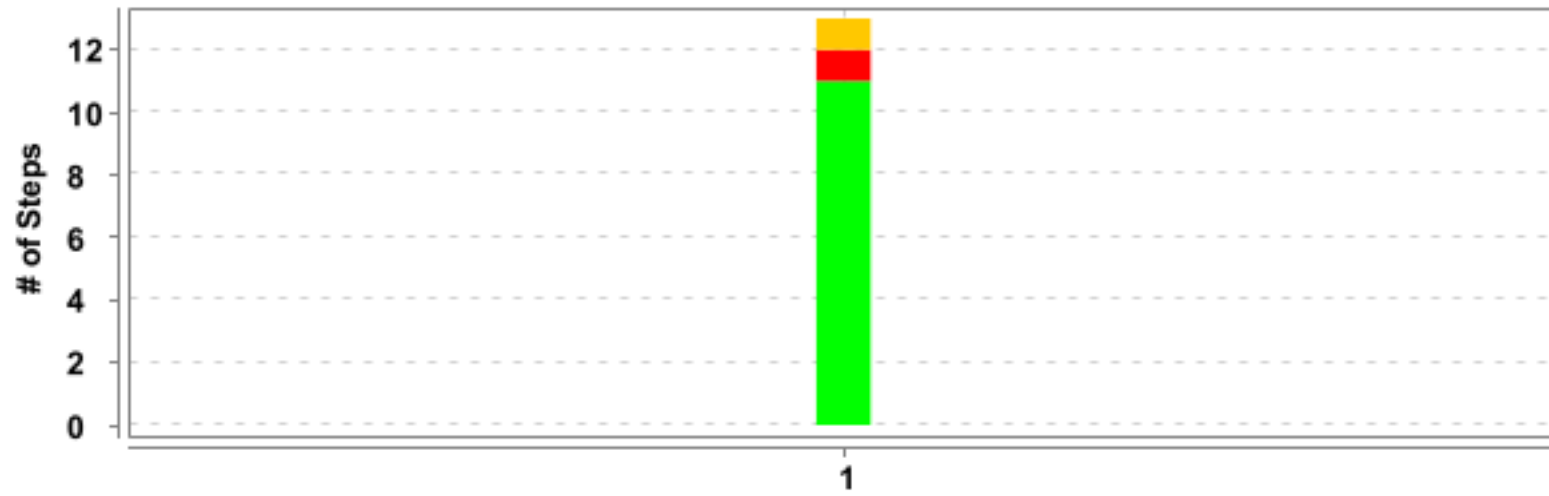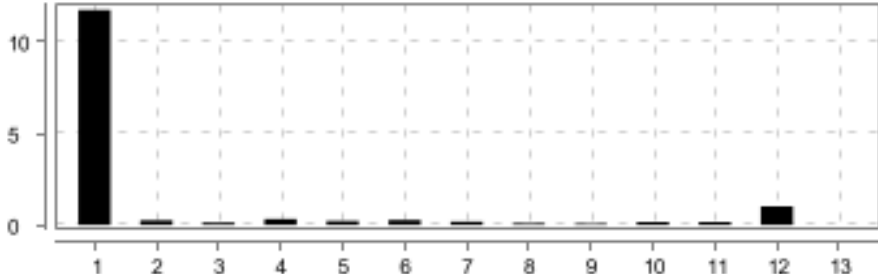
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check The Azentio UAT functionaliy	budget for Budgetcode type Quaterly	13	11	1	1	19.621 s

(F)- Check The Azentio UAT functionaliy

FAILED	DURATION - 19.627 s	Scenarios		Steps	
		Total - 1		Total - 13	
/ 2:28:24.335 pm // 2:28:43.962 pm /		Pass - 0	1	Pass - 11	13
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 1	
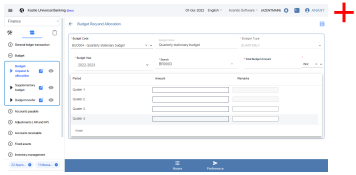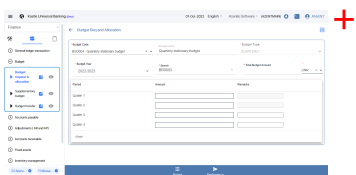
(S)- budget for Budgetcode type Quaterly
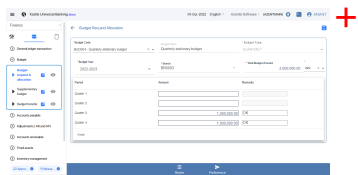
FAILED	DURATION - 19.621 s		Steps	
/ 2:28:24.341 pm // 2:28:43.962 pm /			Total - 13	13
Check The Azentio UAT functionaliy			Pass - 11	
@KUBS_UAT_Quarterly_KUBS_BP_UAT_002_0-02			Fail - 1	
			Skip - 1	

#	Step / Hook Details	Status	Duration
1	Given Navigate to the Azentio Url	PASSED	11.731 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.120 s
	screenshot		
2	Then click the Two Direction Icon	PASSED	0.251 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.153 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	And click to the Budget	PASSED	0.130 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.187 s
	screenshot		
4	Then click on the Budget Sub module Budget Request and Allocation Near Eye Icon	PASSED	0.321 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.259 s
	screenshot		
5	And click on the Add icon in Request and Allocation	PASSED	0.208 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.267 s
	screenshot		
6	Then select to Budget Code	PASSED	0.272 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.177 s
	screenshot		

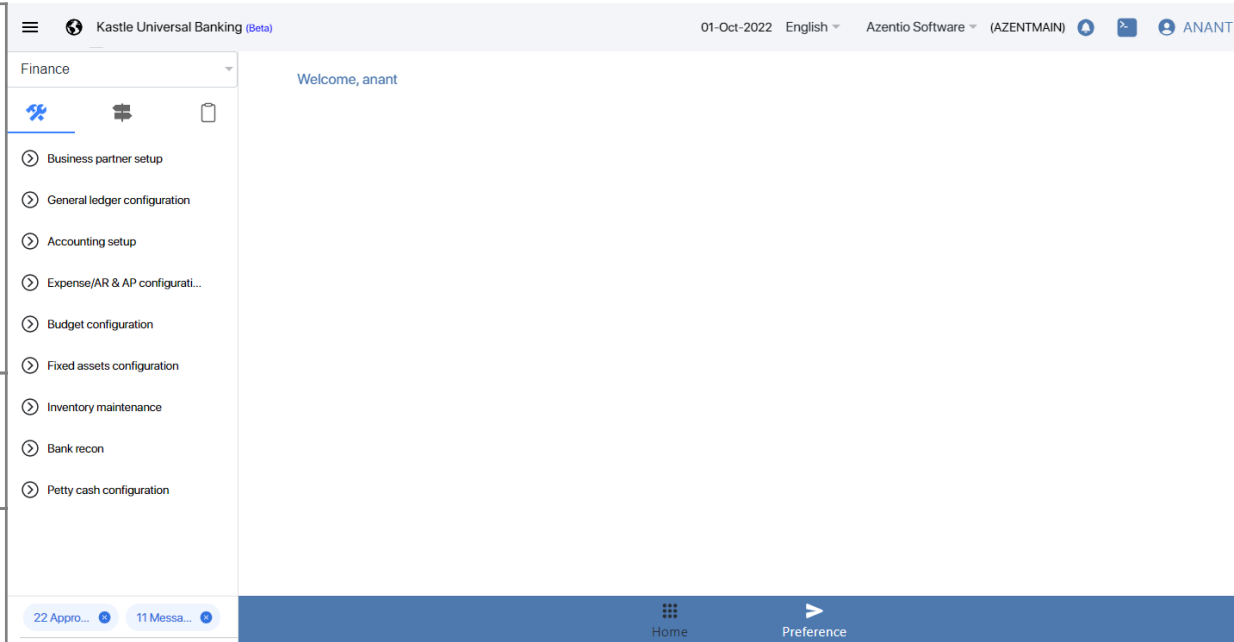| #	Step / Hook Details	Status	Duration
7	And select the Budget Year	PASSED	0.188 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.254 s
	screenshot		
8	Then click on the Branch	PASSED	0.097 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.264 s
	screenshot		
9	And select the one Branch	PASSED	0.077 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.162 s
	screenshot		
10	Then click on the Branch ok button	PASSED	0.170 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.327 s
	screenshot		

#	Step / Hook Details	Status	Duration
11	Then select one currency we need	PASSED	0.170 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.199 s
12	And Enter the Amount for Quarterly Budget type	FAILED	1.019 s

	org.openqa.selenium.ElementNotInteractableException: element not interactable (Session info: chrome=97.0.4692.71) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014547', ip: '10.1.47.111', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [12812080f210a7fc39549d5aefd10e7e, sendKeysToElement {id=ab6143c7-87c5-4d72-8d7d-5747a6d2656d, value=[Ljava.lang.CharSequence;@5c76fce4}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 97.0.4692.71, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:53575}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53575/devtoo..., se:cdpVersion: 97.0.4692.71, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Element: [[ChromeDriver: chrome on WINDOWS (12812080f210a7fc39549d5aefd10e7e)] -> xpath: //datatable-body-cell[3]/div/input[@id='1']] Session ID: 12812080f210a7fc39549d5aefd10e7e
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	    at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:251)
	    at org.openqa.selenium.remote.RemoteWebElement.sendKeys(RemoteWebElement.java:107)
	    at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:52) at jdk.proxy2/jdk.proxy2.$Proxy46.sendKeys(Unknown Source) at stepdefinitions.Budget_BudgetRequestandAllocation_UAT. enter_the_amount_for_quarterly_budget_type(Budget_BudgetRequestandAllocation_UAT.java:421) at ?.Enter the Amount for Quarterly Budget type(file:///C:/Users/inindc00075/git/repository/Arshath_Azentio_AutomationFramework/src/test/java/features/BUDGET_BudgetRequestandAllocation_UAT.feature:31) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.115 s
13	And click on the save button	SKIPPED	0.000 s

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) budget for Budgetcode type Quaterly

(F) Check The Azentio UAT functionaliy

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) budget for Budgetcode type Quaterly

(F) Check The Azentio UAT functionaliy

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) budget for Budgetcode type Quaterly

(F) Check The Azentio UAT functionaliy

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) budget for Budgetcode type Quaterly

(F) Check The Azentio UAT functionaliy

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) budget for Budgetcode type Quaterly	
(F) Check The Azentio UAT functionaliy	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) budget for Budgetcode type Quaterly	
(F) Check The Azentio UAT functionaliy	

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) budget for Budgetcode type Quaterly

(F) Check The Azentio UAT functionaliy

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) budget for Budgetcode type Quaterly

(F) Check The Azentio UAT functionaliy

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) budget for Budgetcode type Quaterly

(F) Check The Azentio UAT functionaliy

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) budget for Budgetcode type Quaterly

(F) Check The Azentio UAT functionaliy

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) budget for Budgetcode type Quaterly	
(F) Check The Azentio UAT functionaliy	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) budget for Budgetcode type Quaterly	
(F) Check The Azentio UAT functionaliy	