
Cucumber Report




FEATURES SUMMARY -- 2 --

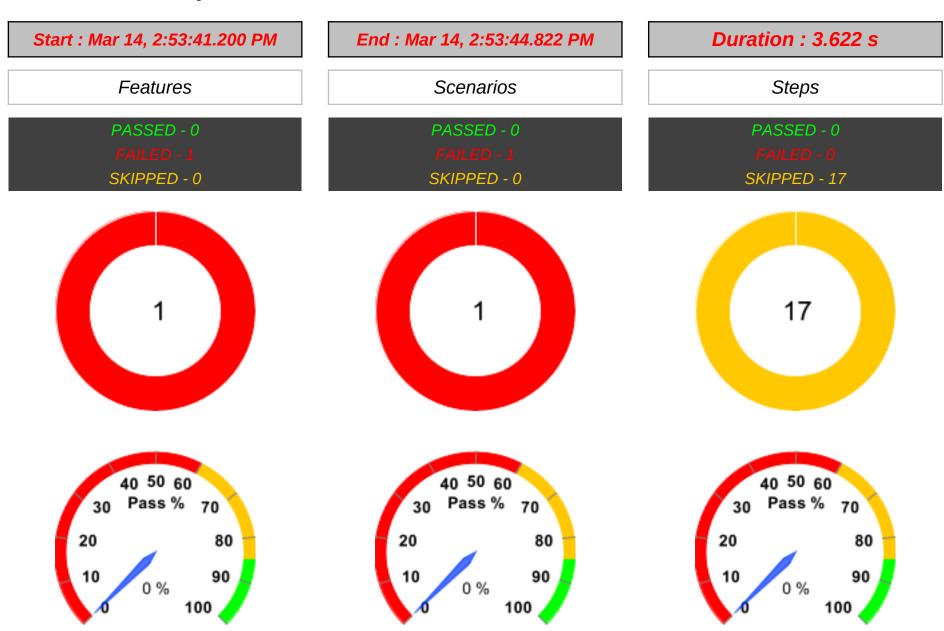

#	Feature Name	T	P	F	S	Duration
1	AR/AP Module	1	0	1	0	3.622 s

SCENARIOS SUMMARY -- 3 --

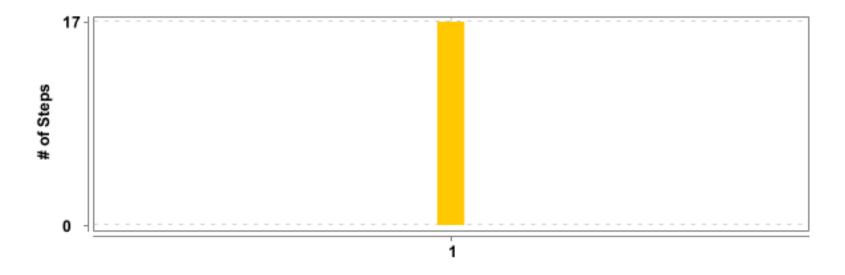


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	AR/AP Module	Verify Accounting entries post Debit Note is cancelled	17	0	0	17	3.617 s

DETAILED SECTION -- 4 -

(F)- AR/AP Module

FAILED	DURATION - 3.622 s	Scenarios		Steps	
		Total - 1		Total - 17	
/ 2:53:41.200 PN	M // 2:53:44.822 PM /	Pass - 0	1	Pass - 0	17
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 17	

(S)- Verify Accounting entries post Debit Note is cancelled

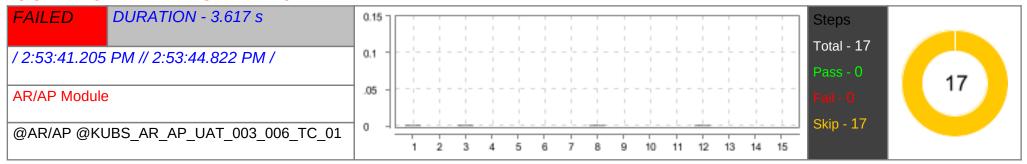

#	Step / Hook Details	Status	Duration
	BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario)	FAILED	3.560 s
	org.openqa.selenium.remote.http.ConnectionFailedException: Unable to establish websocket connection to http://localhost:51511/devtools/browser/6a3d0618-9c05-4cf4-9153-3913e84aac31 Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.128', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: driver.version: ChromeDriver		
	at org.openqa.selenium.remote.http.netty.NettyWebSocket. <init>(NettyWebSocket.java:104)</init>		
	at org.openqa.selenium.remote.http.netty.NettyWebSocket.lambda\$create\$3(NettyWebSocket.java:137)		
	at org.openqa.selenium.remote.http.netty.NettyClient.openSocket(NettyClient.java:127)		
	at org.openqa.selenium.devtools.Connection. <init>(Connection.java:73)</init>		
	at org.openqa.selenium.chromium.ChromiumDriver.lambda\$new\$1(ChromiumDriver.java:102)		
	at java.base/java.util.Optional.map(Optional.java:260)		
	at org.openqa.selenium.chromium.ChromiumDriver. <init>(ChromiumDriver.java:100)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:99)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:86)</init>		
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:41)</init>		
	at resources.BaseClass.initializeDriver(BaseClass.java:28)		
	at stepdefinitions.HooksClass.browserSetup(HooksClass.java:32)		
1	Given User should go to the kubs url and login as a maker user	SKIPPED	0.001 s

DETAILED SECTION -- 5 --

#	Step / Hook Details	Status	Duration
2	Then select data set ID for accounting entries post debit note is cancelled	SKIPPED	0.000 s
3	Then Choose the second Tab Segment	SKIPPED	0.001 s
4	And Click On Main module Accounts Receivable	SKIPPED	0.000 s
5	Then Click on Accounts Receivable Debit Note Eye Icon	SKIPPED	0.000 s
6	And Click On Search Icon	SKIPPED	0.000 s
7	Then Enter Cancelled Value In Debit Not Status	SKIPPED	0.000 s
8	Then Click on Table Row First Eye Icon in ARAP	SKIPPED	0.001 s
9	And Get The Bp Name and Debit Number Store It	SKIPPED	0.000 s
10	Then Third Segment report Icon	SKIPPED	0.000 s
11	And Choose Enquiry Module for cancelled debit note	SKIPPED	0.000 s
12	Then Click on financial transction edit button	SKIPPED	0.001 s
13	And choose branch codes for cancelled debit note	SKIPPED	0.000 s
14	And click on transaction from date in calender	SKIPPED	0.000 s
15	Then Select from date in calender for cancelled debit note	SKIPPED	0.000 s
16	And click on view button	SKIPPED	0.001 s
17	Then Verify Accounting entries post Debit Note is cancelled	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.001 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.close()" because "this.driver" is null at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		