
Duration: 2 m 57.351 s Start: Jan 11, 6:34:35.265 PM End: Jan 11, 6:37:32.616 PM Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 0 SKIPPED - 0 SKIPPED - 0 SKIPPED - 9 10 40 50 60 40 50 60 40 50 60 30 Pass % 70 30 Pass % 70 30 Pass % 70 20 20 20 80 80 80 90 90 100

FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	AR/AP Module	1	0	1	0	2 m 57.351 s

SCENARIOS SUMMARY

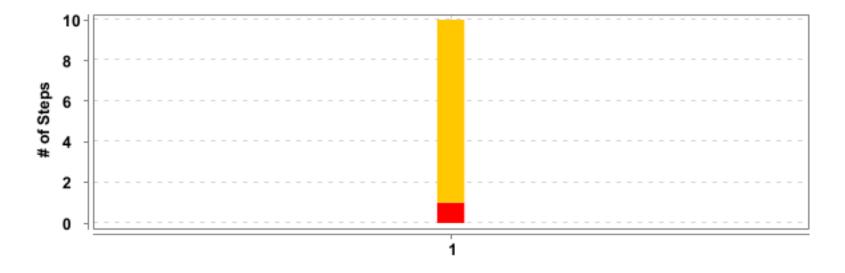


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	AR/AP Module	Verify accounting entries for cleared cheques.	10	0	1	9	2 m 57.344 s

DETAILED SECTION -- 4 --

(F)- AR/AP Module

FAILED	DURATION - 2 m 57.351 s	Scenarios		Steps	
		Total - 1		Total - 10	
/ 6:34:35.265 P	PM // 6:37:32.616 PM /	Pass - 0	1	Pass - 0	10
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 9	

(S)- Verify accounting entries for cleared cheques.

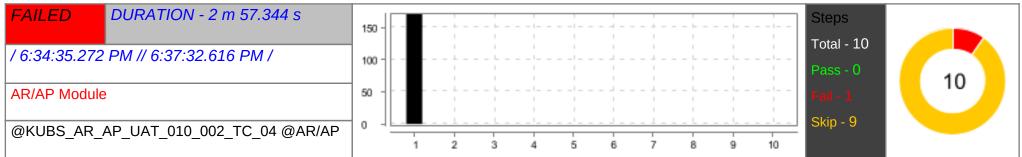

#	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	FAILED	2 m 50.769 s
	org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//input[@name='username]"} (Session info: chrome=108.0.5359.125) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP- PSK9T3U', ip: '10.200.4.220', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa. selenium.chrome.ChromeDriver Command: [daf40b9ba628fd08ecdc5f3ee49da15e, findElement {using=xpath, value=//input[@name='username]]} Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 108.0.5359.125, chrome: {chromedriverVersion: 108.0.5359.71 (1e0e3868ee06, userDataDir: C:\Users\IN\INDC~1\AppData\L\}, goog:chromeOptions: {debuggerAddress: localhost:55614}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:55614/devtoo, se:cdpVersion: 108.0.5359.125, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: daf40b9ba628fd08ecdc5f3ee49da15e at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(WithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.java:133)	PAILED	2 111 50.709 \$

#	Step / Hook Details	Status	Duration
	at org. openqa. selenium.remote. codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org. openqa. selenium.remote. HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org. openqa. selenium.remote. service. DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org. openqa. selenium.remote. RemoteWebDriver.execute(RemoteWebDriver.java:547) at org. openqa. selenium.remote. ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org. openqa. selenium.remote. ElementLocation.findElement(ElementLocation.java:60) at org. openqa. selenium.remote. RemoteWebDriver.findElement(RemoteWebDriver.java:373) at org. openqa. selenium.remote. RemoteWebDriver.findElement(RemoteWebDriver.java:373) at org. openqa. selenium.support.pagefactory. DefaultElement(DefaultElement(DefaultElementLocator.java:70) at org. openqa. selenium.support.pagefactory. DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org. openqa. selenium.support.pagefactory. internal. LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy46.sendKeys(Unknown Source) at stepdefinitions. KUBS_Login.loginToAzentioAppByMaker(KUBS_Login.java:40) at stepdefinitions. KUBS_Login.loginToAzentioAppByMaker(KUBS_Login.java:40) at stepdefinitions.ACCOUNTSPAYABLE_VendorContracts. user_should_go_to_the_kubs_url_and_login_as_a_maker_user(ACCOUNTSPAYABLE_VendorContracts.java:47) at ?.User should go to the kubs_url and login as a maker user(Ele:///C://Users/ININDC00091/git/AzentioAutomationFramework/ DeveshFW_Excel/ARAP_AzentioAutomationFramework_Excel/src/test/java/features/ArAp_2_Excel.feature:1110) * Not displayable characters are replaced by '?'. AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot	PASSED	0.415 s
2	Then select data set ID for accounting entries for cleared cheques	SKIPPED	0.000 s
3	And user should navigate to accounts receivable menu	SKIPPED	0.000 s
4	When click on eye button of update cheque status	SKIPPED	0.000 s
5	Then get slip number by using cheque number	SKIPPED	0.000 s
6	Then click on report icon1	SKIPPED	0.000 s
7	Then click on enquiry menu	SKIPPED	0.000 s
8	Then click on temp grid button of financial transaction	SKIPPED	0.001 s
9	And fill the required fields of financial transaction	SKIPPED	0.000 s
10	Then click on view button to view the reports and verify	SKIPPED	0.001 s

EXPANDED SECTION -- 6 --

