

Cucumber Report

Jan 12, 2022, 12:34:46 AM

Start : Jan 12, 12:33:57.559 AM

End : Jan 12, 12:34:45.451 AM

Duration : 47.892 s

Features


Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0


PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 1
SKIPPED - 4

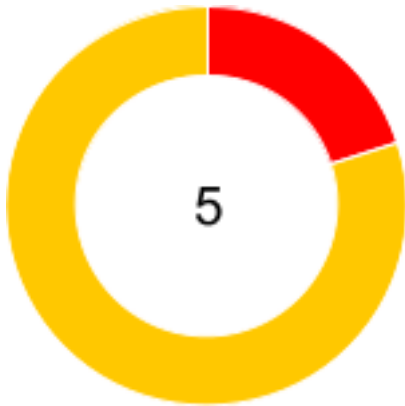



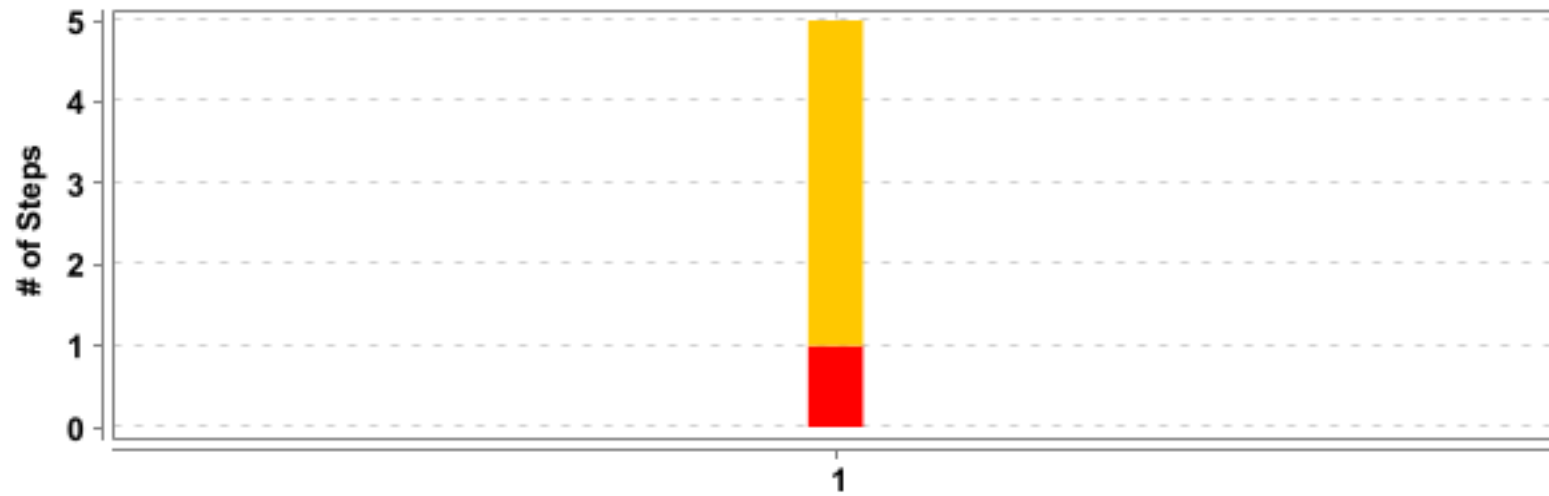

#	Feature Name	T	P	F	S	Duration
1	Checking the Supplementary Budget functionality	1	0	1	0	47.892 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Checking the Supplementary Budget functionality	To verify user is able to raise supplementary request for Annually budget	5	0	1	4	47.889 s

(F)- Checking the Supplementary Budget functionality

FAILED	DURATION - 47.892 s	Scenarios		Steps	
/ 12:33:57.559 AM // 12:34:45.451 AM /		Total - 1		Total - 5	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 4	

(S)- To verify user is able to raise supplementary request for Annually budget
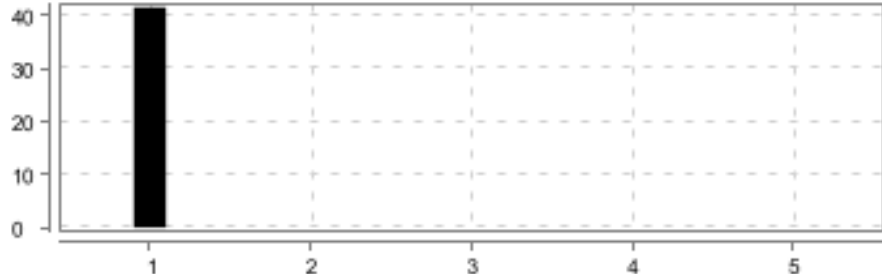
<div>FAILED</div> <div>DURATION - 47.889 s</div>			Steps	
/ 12:33:57.562 AM // 12:34:45.451 AM /			Total - 5	
Checking the Supplementary Budget functionality			Pass - 0	
@SupplementaryBudget_BP_SB_11_02			Fail - 1	
			Skip - 4	

#	Step / Hook Details	Status	Duration
1	<p>Given maker should navigate to the url and login with valid credentials</p> <p>org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [10d178de11c764f8ded05e2fdf5ee665, findElement {using=xpath, value=//ion-title[contains(text(),'Welcome')]]] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:54615}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:54615/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 10d178de11c764f8ded05e2fdf5ee665</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)</p> <p>at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)</p> <p>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)</p> <p>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)</p> <p>at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)</p> <p>at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)</p> <p>at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)</p>	FAILED	41.549 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy46.isDisplayed(Unknown Source) at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:307) at org.openqa.selenium.support.ui.ExpectedConditions.access\$000(ExpectedConditions.java:40) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:293) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:290) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:656) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:208) at helper.WaitHelper.waitForElement(WaitHelper.java:79) at stepdefinitions.KUBS_Login.loginToAzentioApp(KUBS_Login.java:41) at stepdefinitions.BUDGET_SupplementaryBudget. maker_should_navigate_to_the_url_and_login_with_valid_credentials(BUDGET_SupplementaryBudget.java:48) at ?.maker should navigate to the url and login with valid credentials(file:///C:/Users/inindc00089/eclipse-workspace/ AzentioAutomationFramework2/src/test/java/features/BUDGET_SupplementaryBudget.feature:125) * Not displayable characters are replaced by '?'. </pre>		
	<p>AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [10d178de11c764f8ded05e2fdf5ee665, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\Local\Temp\chrome-wk\10d178de11c764f8ded05e2fdf5ee665\chrome-win\10d178de11c764f8ded05e2fdf5ee665}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:54615/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 10d178de11c764f8ded05e2fdf5ee665 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) </pre>	FAILED	4.010 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347) at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42) </pre>		
2	And maker should navigate to the budget module	SKIPPED	0.000 s
3	And maker click on budget field	SKIPPED	0.001 s
4	When maker click on budget supplementary eye icon	SKIPPED	0.000 s
5	Then validate maker can save request for the Annually budget	SKIPPED	0.001 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.246 s
	<pre> org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [10d178de11c764f8ded05e2fdf5ee665, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:54615}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se.cdp: ws://localhost:54615/devtoo..., se.cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 10d178de11c764f8ded05e2fdf5ee665 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432) at stepdefinitions.HooksClass.TearDown(HooksClass.java:52) </pre>		