Cucumber Report

Start : Jan 12, 7:25:27.425 PM	**End : Jan 12, 7:25:43.742 PM**	**Duration : 16.317 s**
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 3 FAILED - 1 SKIPPED - 6
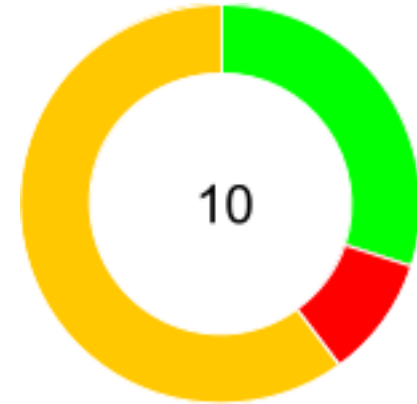
#	Feature Name	T	P	F	S	Duration
1	To check BudgetDefinition moduel feature	1	0	1	0	16.317 s
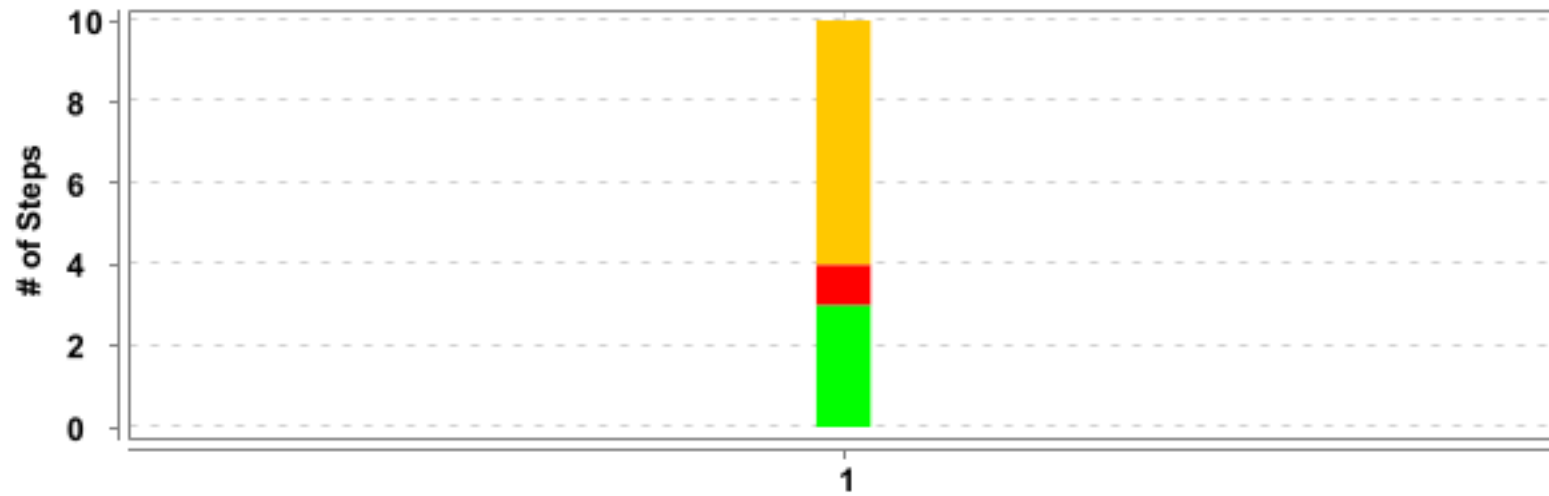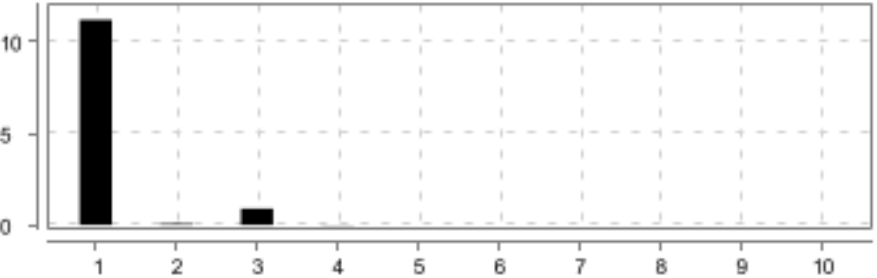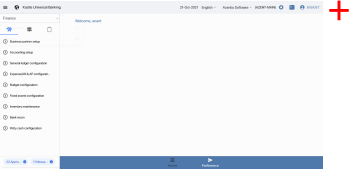
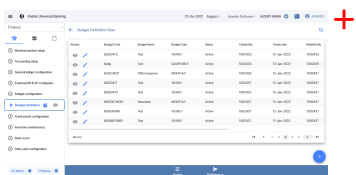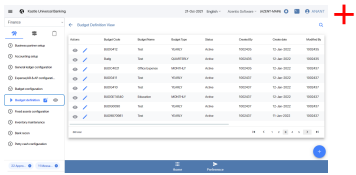| #	Feature Name	Scenario Name	T	P	F	S	Duration
1	To check BudgetDefinition moduel feature	To verify user can able to see modification history of updated budget code in autoauth	10	3	1	6	16.312 s

(F)- To check BudgetDefinition moduel feature

FAILED	DURATION - 16.317 s	Scenarios		Steps	
		Total - 1		Total - 10	
/ 7:25:27.425 PM // 7:25:43.742 PM /		Pass - 0	1	Pass - 3	10
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 6	

(S)- To verify user can able to see modification history of updated budget code in autoauth

FAILED	DURATION - 16.312 s		Steps	
			Total - 10	
/ 7:25:27.430 PM // 7:25:43.742 PM /			Pass - 3	10
To check BudgetDefinition moduel feature			Fail - 1	
@Modification_history_autoAuth			Skip - 6	

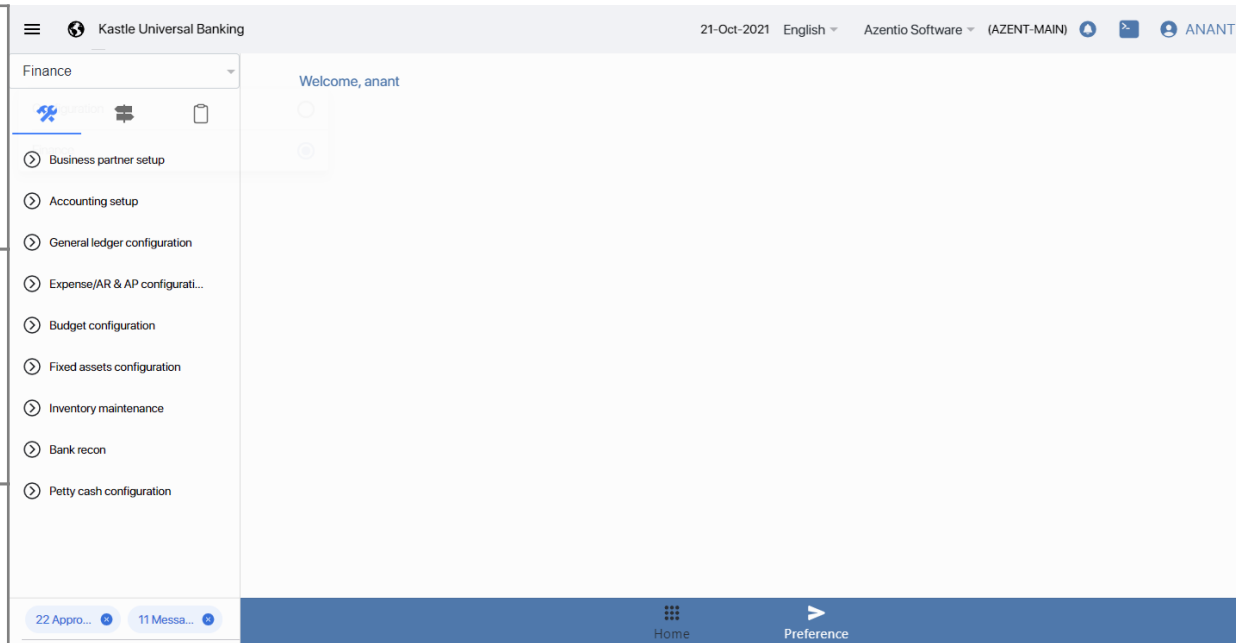| #	Step / Hook Details	Status	Duration
1	Given navigate to URL and login as a maker and choose finance option	PASSED	11.203 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.570 s
	screenshot		
2	Then click on budget configuration Menu	PASSED	0.080 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.229 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	And Find the budet code in the list	PASSED	0.888 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.183 s
	screenshot		
4	Then verify system should display the status of the record	FAILED	0.023 s

	org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//span[contains(text(),'BUDG4001')]/ancestor::datatable-body-cell/following-sibling::datatable-body-cell[3]//span"} (Session info: chrome=96.0.4664.45) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014584', ip: '10.1.47.109', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [cc413a93e0a8d9212c156bc8ad000eb7, findElement {using=xpath, value=//span[contains(text(),'BUDG4001')]/ancestor::datatable-body-cell/following-sibling::datatable-body-cell[3]//span}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:56744}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:56744/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: cc413a93e0a8d9212c156bc8ad000eb7
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	  at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at stepdefinitions.BUDGET_BudgetCreation.verify_system_should_display_the_status_of_the_record(BUDGET_BudgetCreation.java:305) at ?.verify system should display the status of the record(file:///C:/Users/inindc00076/git/AzentioAutomationFramework2/AzentioAutomationFramework/src/test/java/features/KUBS_BudgetDefinition.feature:519) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.161 s
5	And verify system should display the name or id who created the record	SKIPPED	0.000 s
6	And verify system should display record created date	SKIPPED	0.000 s
7	And verify system should display the name or id who made changes the record at last	SKIPPED	0.000 s
8	And verify system should display record modified date	SKIPPED	0.000 s
9	Then verify system should display name or id of the authorized person of that record	SKIPPED	0.000 s
10	And verify system should diplay the authorized date	SKIPPED	0.000 s

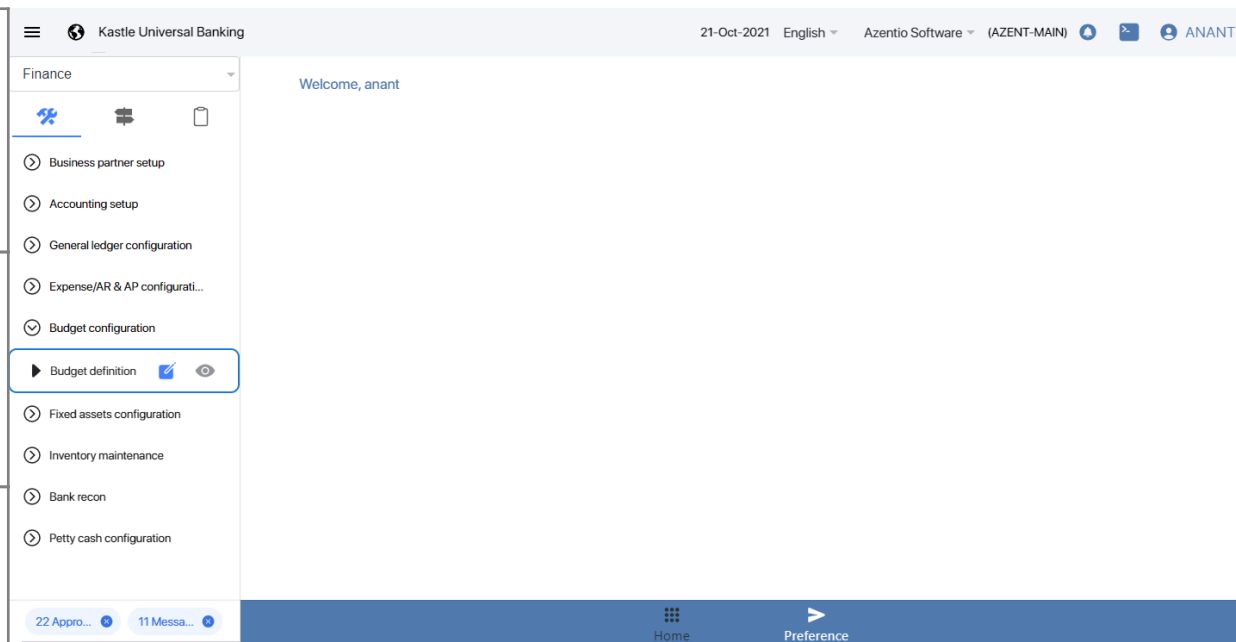| (Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario) | |
| (S) To verify user can able to see modification history of updated budget code in autoauth | |
| (F) To check BudgetDefinition moduel feature | |

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) To verify user can able to see modification history of updated budget code in autoauth	
(F) To check BudgetDefinition moduel feature	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) To verify user can able to see modification history of updated budget code in autoauth	
(F) To check BudgetDefinition moduel feature	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) To verify user can able to see modification history of updated budget code in autoauth	
(F) To check BudgetDefinition moduel feature	